

After DVD Architect software is installed and you start it for the first time, the registration wizard appears. This wizard offers easy steps that allow you to register the software online with Sony Media Software. Alternatively, you may register online at <a href="https://www.sony.com/mediasoftware">www.sony.com/mediasoftware</a> at any time.

Registering your product will provide you with exclusive access to a variety of technical support options, notification of product updates, and special promotions exclusive to registered DVD Architect users.

# Registration assistance

If you do not have access to the Internet, registration assistance is available during normal weekday business hours. Please contact our Customer Service Department by dialing one of the following numbers:

Telephone/Fax Country

1-800-577-6642 (toll-free) US, Canada, and Virgin Islands

+608-204-7703 for all other countries

1-608-250-1745 (Fax) All countries

#### Customer service/sales

For a detailed list of Customer Service options, we encourage you to visit http://mediasoftware.sonypictures.com/support/custserv.asp. Use the following numbers for telephone support during normal weekday business hours:

Telephone/Fax/E-mail Country

1-800-577-6642 (toll-free) US, Canada, and Virgin Islands

+608-204-7703 for all other countries

1-608-250-1745 (Fax) All countries

#### **Technical support**

For a detailed list of Technical Support options, we encourage you to visit <a href="http://mediasoftware.sonypictures.com/support/default.asp">http://mediasoftware.sonypictures.com/support/default.asp</a>. To listen to your support options, please call 608-256-5555.

# About your rights in DVD Architect software

DVD Architect software is licensed to you under the terms of the End User License Agreement. The End User License Agreement is first presented to you when you install the software. Please review the End User License Agreement carefully as its terms affect your rights with respect to the software. For your reference, a copy of the End User License Agreement for DVD Architect software is located at <a href="http://www.sony.com/mediasoftware">http://www.sony.com/mediasoftware</a>.

### **About your privacy**

Sony Media Software respects your privacy and is committed to protecting personal information. Your use of the software is governed by the Software Privacy Policy. A copy of this policy is incorporated into the registration process and you are asked to agree to its terms prior to accepting the terms of the End User License Agreement. Please review its contents carefully as its terms and conditions affect your rights with respect to the information that is collected by the software. For your reference, a copy of the Software Privacy Policy is located at <a href="http://mediasoftware.sonypictures.com/corporate/privacy.asp">http://mediasoftware.sonypictures.com/corporate/privacy.asp</a>.

# Proper use of software

DVD Architect software is not intended and should not be used for illegal or infringing purposes, such as the illegal copying or sharing of copyrighted materials. Using DVD Architect software for such purposes is, among other things, against United States and international copyright laws and contrary to the terms and conditions of the End User License Agreement. Such activity may be punishable by law and may also subject you to the breach remedies set forth in the End User License Agreement.

#### Legal notices

Vegas, Vegas+DVD, DVD Architect, Vegas Movie Studio, Vegas Movie Studio+DVD, DVD Architect Studio, ACID, Music Studio, Sony Sound Series, Groove Mapping, Groove Cloning, CD Architect, Sound Forge, Audio Studio, and Cinescore are trademarks or registered trademarks of Madison Media Software, Inc. or its affiliates in the United States and other countries. All other trademarks or registered trademarks are the property of their respective owners in the United States and other countries.

#### **Thomson Fraunhofer MP3**

MPEG Layer-3 audio coding technology licensed from Fraunhofer IIS and Thomson.

Supply of this product does not convey a license nor imply any right to distribute content created with this product in revenue generating broadcast systems (terrestrial, satellite, cable and/or other distribution channels), streaming applications (via internet, intranets and/or other networks), other content distribution systems (pay-audio or audio on demand applications and the like) or on physical media (compact discs, digital versatile discs, semiconductor chips, hard drives, memory cards and the like).

An independent license for such use is required. For details, please visit: http://www.mp3licensing.com.

#### Microsoft DirectX programming interface

Portions utilize Microsoft® DirectX® technologies. Copyright © 1999 – 2006 Microsoft Corporation. All rights reserved.

#### Microsoft Windows Media 9

Portions utilize Microsoft Windows Media® technologies. Copyright © 1999 – 2006 Microsoft Corporation. All rights reserved.

#### Dolby, Dolby Digital AC-3, and AAC encoding

This product contains one or more programs protected under international and U.S. copyright laws as unpublished works. They are confidential and proprietary to Dolby Laboratories. Their reproduction or disclosure, in whole or in part, or the production of derivative works therefrom without the express permission of Dolby Laboratories is prohibited. Copyright 1992 – 2006 Dolby Laboratories. All rights reserved

Dolby®, the double-D symbol, AC-3®, and Dolby Digital® are registered trademarks of Dolby Laboratories. AAC™ is a trademark of Dolby Laboratories.

#### **PNG file format**

Copyright © 2006. World Wide Web Consortium (Massachusetts Institute of Technology, European Research Consortium for Informatics and Mathematics, Keio University). All rights reserved. This work is distributed under the W3C Software License in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTIBILITY or FITNESS FOR A PARTICULAR PURPOSE.

http://www.w3.org/Consortium/Legal/2002/copyright-software-20021231.

#### Apple QuickTime

Apple® QuickTime® application is a trademark of Apple, Inc. in the United States and other countries.

#### Apple Macintosh Audio Interchange File Format (AIFF) file format

Apple® Macintosh® Audio Interchange™ File Format (AIFF) is a trademark of Apple, Inc. in the United States and other countries.

#### Targa file format

The Targa™ file format is a trademark of Pinnacle Systems, Inc.

#### **Tagged Image File Format (TIFF)**

Adobe Tagged Image $^{\mathsf{TM}}$  File Format is a registered trademark of Adobe Systems Incorporated in the United States and other countries. All rights reserved.

#### **Macromedia Flash**

Macromedia and Flash are trademarks or registered trademarks of Macromedia, Inc. in the United States and/or other countries.

Madison Media Software, Inc. A subsidiary of Sony Corporation of America 1617 Sherman Avenue Madison, WI 53704 USA

The information contained in this manual is subject to change without notice and does not represent a guarantee or commitment on behalf of Madison Media Software, Inc. in any way. All updates or additional information relating to the contents of this manual will be posted on the Sony Media Software web site, located at <a href="http://www.sony.com/mediasoftware">http://www.sony.com/mediasoftware</a>. The software is provided to you under the terms of the End User License Agreement and Software Privacy Policy, and must be used and/or copied in accordance therewith. Copying or distributing the software except as expressly described in the End User License Agreement is strictly prohibited. No part of this manual may be reproduced or transmitted in any form or for any purpose without the express written consent of Madison Media Software, Inc.

Copyright © 2006. Madison Media Software, Inc., a subsidiary of Sony Corporation of America.

Program Copyright © 2006. Madison Media Software, Inc., a subsidiary of Sony Corporation of America. All rights reserved.

# Table of Contents

Intr	oductionoduction	11
	Welcome to DVD Architect software!	11
	System requirements	11
	Installing DVD Architect software	11
	Getting help	11
	Online help	11
	Context-sensitive help	12
	Help on the Web	12
Lea	rning the DVD Architect Workspace	13
	Main window	13
	Main window components	
	Project Overview window (Ctrl+Alt+1)	
	Workspace (Alt+0)	15
	Editing toolbar (Alt+1)	16
	Text toolbar (Alt+2)	16
	Window Docking Area (F11)	17
	Explorer window (Alt+3)	17
	Themes window (Alt+4)	
	Buttons window (Alt+5)	
	Backgrounds window (Alt+6)	
	Properties window (Alt+8)	
	Timeline window (Alt+9)	
	Playlists window (Ctrl+Alt+2)	
	DVD Scripts (Ctrl+Alt+3)	22
Get	ting Started	23
	How it works	23
	Preparing files for DVD Architect software	23
	AC-3 audio (.ac3)	23
	PCM audio (.wav)	23
	NTSC MPEG video (.m2p, .mp2, .mpg, .mpeg)	
	PAL MPEG video (.m2p, .mp2, .mpg, .mpeg)	
	Starting a new project	
	Opening an existing project	
	Choosing your media files	
	Using Explorer window views	
	Downloading media from the Web  Previewing media files	
	Adding files to your project	
	Setting the DVD start item	

	Setting the DVD introduction (first play) media	27
	Setting your project properties	27
	Disc properties	27
	Copy protection	30
	Regions	31
	Mastering	
	Summary tab information	
	Optimizing your project	
	Determining whether menus and titles are compliant	
	Using the Optimize DVD dialog to fine-tune your project	
	Editing a media file's source project	
	Saving your project	
	Saving a copy of your project (Save As)	38
Cre	eating a Menu-Based DVD	39
	Building menus	39
	Adding a submenu	39
	Adding a submenu from a file	39
	Reapplying a file's layout to menu objects	40
	Inserting pages	40
	Adding pages	
	Deleting pages	
	Changing page order	
	Editing menu page properties	
	General	
	Background Media	
	End Actions	
	Remote Buttons	
	Adding titles	
	Inserting a picture compilation	
	Inserting a music/video compilation	
	Inserting a single-movie title	
	Editing title order	
	Adding graphics	47
	Editing graphics properties	47
	Transformations	
	Media	
	Color Sets	48
	Inserting and editing text	48
	Inserting text on a menu or page	48
	Setting a menu's title text object	48
	Formatting text	49

Editing text	
Moving text	49
Setting loop points	50
Inserting a scene selection menu	50
Continuing playback after playing the selected scene	50
Returning to the menu after playing the selected scene/chapter	51
Creating a scene selection only DVD	51
Inserting a setup menu	52
Adding navigation buttons	53
Creating menu transitions	53
Creating custom menus	
Using color sets	54
Editing a color set	54
Applying color sets	54
Changing an object's size	
Resizing an object	55
Making all selected objects the same height or width	55
Cropping and adjusting video and graphics	55
Displaying the Crop and Adjust window	55
Using the toolbar	56
Crop and adjust properties	
Cropping graphics	
Crop and video effects keyframes	58
Adding keyframes	
Deleting keyframes	59
Navigating between keyframes	
Changing interpolation curves between keyframes	
Moving keyframes	
Editing crop settings	
Viewing and editing media properties	
Displaying the Media Properties window	
Editing media properties	
Opening in Graphics Editor	
Moving and arranging objects	61
Changing the position of an object	
Transformation keyframes	
The Keyframe tool	
Editing button order for a menu	
Alternatically eligning a biasta based on averant them.	
Automatically aligning objects based on current theme	
Centering objects	
Transmind Chiefl Shacilla	

	Deleting objects	. 66
	Enabling snapping	66
	Snapping to the grid	. 67
	Snapping to other objects	. 67
	Snapping to safe areas	. 67
	Using automatic button actions	67
	Button properties	67
	Transformations	.68
	Action	. 68
	Media	. 69
	Highlight	.70
	Navigation	.71
	Color Sets	
	Button Region	
	Copying and pasting attributes	.72
	The Navigation tool	.73
	Setting object order	.73
	Viewing object order	. 73
	Changing object order	.74
Crea <sup>.</sup>	ting a Music/Video Compilation	75
	Adding a music/video compilation to a menu	
	Adding audio	
	Replacing an audio file	
	Adding and editing images or videos	
	Inserting images or videos	
	Replacing an image or video	
	Setting image stretching or scaling	
	Rotating an image	
	Adjusting brightness and contrast or editing the image	
	Adding and editing text	
	Adding text	
	Formatting text	
	Moving text	
	Deleting text	
	Setting thumbnail display	.78
	Music/video compilation properties	.78
	General	. 79
	End Action	
	Remote Buttons	
	Slide	. 80
	Color Sets	.81

Adding a picture compilation to a menu	Crea	ting a Picture Compilation	.83
Inserting images       83         Replacing an image       84         Generating slideshow animation       84         Setting image stretching or scaling       85         Rotating an image       85         Adjusting brightness and contrast or editing the image       86         Setting display duration from the Picture Compilation Properties window       86         Setting display duration from the timeline       86         Inserting an empty slide       86         Adding and editing text       87         Adding text       87         Formatting text       87         Moving text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Treating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93		Adding a picture compilation to a menu	.83
Replacing an image		Adding and editing images	.83
Generating slideshow animation 84 Setting image stretching or scaling 85 Rotating an image 85 Adjusting brightness and contrast or editing the image 86 Setting display duration from the Picture Compilation Properties window 86 Setting display duration from the timeline 86 Inserting an empty slide 86 Adding and editing text 87 Adding text 87 Formatting text 87 Moving text 87 Deleting text 87 Inserting a graphic 87 Inserting a graphic 88 Setting thumbnail display 88 Setting thumbnail display 88 Picture compilation properties 88 General 88 Track Media 89 End Action 89 Remote Buttons 90 Slide 90 Color Sets 91 Ireating Playlists 93 Adding a playlist to a menu 93 Adding a playlist to a menu 93 Adding a playlist without a link 93		Inserting images	. 83
Setting image stretching or scaling		Replacing an image	. 84
Rotating an image       85         Adjusting brightness and contrast or editing the image       86         Setting display duration from the Picture Compilation Properties window       86         Setting display duration from the timeline       86         Inserting an empty slide       86         Adding and editing text       87         Adding text       87         Formatting text       87         Moving text       87         Inserting a graphic       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93		-	
Adjusting brightness and contrast or editing the image 86 Setting display duration from the Picture Compilation Properties window 86 Setting display duration from the timeline 86 Inserting an empty slide 86 Adding and editing text 87 Adding text 87 Formatting text 87 Moving text 87 Deleting text 87 Inserting a graphic 87 Inserting audio 88 Setting thumbnail display 88 Setting thumbnail display 88 Picture compilation properties 88 General 88 Track Media 89 End Action 89 Remote Buttons 90 Slide 90 Color Sets 91 Creating Playlists 93 Adding a playlist to a menu 93 Adding a playlist to a menu 93 Adding a playlist without a link 93		Setting image stretching or scaling	.85
Setting display duration from the Picture Compilation Properties window  Setting display duration from the timeline  86  Inserting an empty slide  87  Adding and editing text  87  Formatting text  87  Moving text  87  Deleting text  87  Inserting a graphic  87  Inserting audio  88  Setting thumbnail display  88  Picture compilation properties  88  General  88  Track Media  89  End Action  89  Remote Buttons  90  Slide  Color Sets  91  Creating Playlists  93  Adding a playlist to a menu  93  Adding a playlist without a link  93  Adding a playlist without a link  94  86  86  87  88  86  86  87  88  88  88		3	
Setting display duration from the timeline       86         Inserting an empty slide       86         Adding and editing text       87         Adding text       87         Formatting text       87         Moving text       87         Deleting text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93			
Inserting an empty slide       86         Adding and editing text       87         Adding text       87         Formatting text       87         Moving text       87         Deleting text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93			
Adding and editing text       87         Adding text       87         Formatting text       87         Moving text       87         Deleting text       87         Inserting a graphic       87         Inserting thumbnail display       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93			
Adding text       87         Formatting text       87         Moving text       87         Deleting text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93		- ' '	
Formatting text       87         Moving text       87         Deleting text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93			
Moving text       87         Deleting text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93		-	
Deleting text       87         Inserting a graphic       87         Inserting audio       88         Setting thumbnail display       88         Picture compilation properties       88         General       88         Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93			
Inserting a graphic			
Inserting audio		3	
Setting thumbnail display			
Picture compilation properties. 88  General 88  Track Media 89  End Action 89  Remote Buttons 90  Slide 90  Color Sets 91  Creating Playlists 93  Adding a playlist to a menu 93  Adding a playlist without a link 93			
General       .88         Track Media       .89         End Action       .89         Remote Buttons       .90         Slide       .90         Color Sets       .91         Creating Playlists       .93         Adding a playlist to a menu       .93         Adding a playlist without a link       .93			
Track Media       89         End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93		· · ·	
End Action       89         Remote Buttons       90         Slide       90         Color Sets       91         Creating Playlists       93         Adding a playlist to a menu       93         Adding a playlist without a link       93			
Remote Buttons       .90         Slide       .90         Color Sets       .91         Creating Playlists       .93         Adding a playlist to a menu       .93         Adding a playlist without a link       .93			
Color Sets			
Adding a playlist to a menu		Slide	. 90
Adding a playlist to a menu		Color Sets	.91
Adding a playlist to a menu	Crea	iting Playlists	.93
Adding titles to a playlist94		Adding a playlist without a link	. 93
J   /		Adding titles to a playlist	.94
Deleting titles from a playlist94		Deleting titles from a playlist	.94
Rearranging titles in a playlist94		Rearranging titles in a playlist	.94
Renaming a playlist94		Renaming a playlist	.94
3 1 /			
Playlist properties94			
Playlist properties			
Playlist properties			
General95	Crea	iting a Single-Movie DVD or Title	.97
General			
3 1 7			
Playlist properties94			
		End Action	. 95
General		Playlist Item	. 95
General	Crea	ting a Single-Movie DVD or Title	.97
General		Adding a movie title to a menu	.97

	Setting in and out points	9/
	Working with markers	97
	Inserting scene/chapter markers	98
	Inserting chapter markers	98
	Inserting buttons-on-video markers	98
	Renaming markers	99
	Moving markers	99
	Deleting markers	99
	Loading markers	99
	Saving markers	100
	Media properties	100
	General	100
	Track Media	100
	Remote Buttons	101
	Color sets	102
	Adding buttons to videos	102
	Editing button order for a video	103
	Animating buttons with keyframes	104
Add	ding Audio, Video, and Subtitles	107
	Audio tracks	
	Adding audio tracks	
	Replacing audio in a track	
	Setting audio track for timeline playback	
	Changing audio track colors	
	Video tracks	
	Adding video tracks	
	Adding video to tracks	
	Setting video track for timeline playback	
	Changing video track colors	
	Video event properties	
	Subtitles	
	Adding a subtitle track	110
	Adding subtitle text	
	Creating a graphic subtitle	
	Inserting a graphic subtitle	
	Importing subtitles from a file	
	Exporting subtitles	
	Creating subtitles from regions in a Vegas project	
	Adjusting subtitle event timing	113
	Adjusting a subtitle event's length	113
	Copying formatting across subtitle events	114
	Editing a subtitle event's color set	114
	Setting subtitle track for timeline playback	114

Changing subtitle track colors	115
Subtitle properties	115
Subtitle Event	115
Transformations	
Color Sets	
Generating music with Cinescore	116
Generate a new soundtrack	
Edit an existing soundtrack	116
Using Masks, Menus, and Themes	117
Creating custom masks	117
Thumbnail masks	117
Frame masks	118
Highlight masks	119
Creating custom menus and buttons using layered graphics	120
Naming requirements for layers	120
Creating a layered .psd menu	121
Creating custom menus and buttons using single-layer graphics	122
Working with themes	123
Applying themes	124
Choosing a theme	
Applying a theme's alignment to menu objects	
Deleting a theme	
Creating custom themes	
Exporting menu as a theme	125
Learning about positional and grid themes	
Working with positional themes	
Working with grid themes	
Modifying grid layout properties	127
Using Scripting	129
Adding an existing script to a menu or title	130
Creating a script	130
Inserting a statement in a script	130
Appending a statement to a script	130
Removing a statement from a script	131
Rearranging statements in a script	
Editing a script's statements in the Script Properties window	
Testing a script	133
Renaming a script	133
Deleting a script	134
Setting a DVD start script	134
General Purpose Register Memories (GPRM)	134

System Parameter Register Memories (SPRMs)	134
Language codes	135
Previewing Projects	137
Preview window	
Preview toolbar	137
Previewing your project	137
Previewing on an external video monitor	138
Setting up an external monitor	
Configuring an external monitor	139
Preparing and Burning Your DVD	141
Preparing your project	141
Burning your projects	142
Burning 8 cm discs to 12 cm discs	
Burning multiple copies	
Writing a disc master	
Customizing DVD Architect Software	
Changing grid settings	
Using the toolbar	
Hiding and displaying the toolbar	
Reordering toolbar buttons	
Adding buttons to the toolbar	
Setting DVD Architect software preferences	
General tab	
Video tab	
Video Device tab	
Editing tab	
Display tab	
Preview tab	154
Burning tab	154
Mastering tab	155
Shortcuts	157
Keyboard shortcuts	157
Project file	157
Magnification and view	157
General editing	157
Inserting objects and titles	
Timeline window	
Preview	
Mouse shortcuts	

# **Chapter 1**: Introduction

#### Welcome to DVD Architect software!

DVD Architect™ software has everything you need to create and burn professional DVDs on your computer. You'll be creating picture slideshows, single-movie DVDs, music compilations, and menu-based DVDs on your computer in no time!

# System requirements

- Microsoft® Windows® 2000 SP4 or XP
- 800 MHz processor
- 200 MB hard-disk space for program installation
- 256 MB RAM
- OHCI compatible i.LINK® connector\*/IEEE-1394DV card (for external-monitor preview)
- Microsoft Windows-compatible sound card
- DVD-ROM drive (for installation from a DVD only)
- Supported DVD-R/-RW/+R/+RW drive (for DVD burning only)
- Microsoft DirectX® 9.0c or later (included on application disc)
- Microsoft .NET Framework 2.0 (included on application disc)
- Internet Explorer 5.1 or later (included on application disc)

Note: Some features may require product registration.

i.LINK is a registered trademark of Sony Electronics, used only to designate that a product contains an IEEE 1394 connector. All products with an IEEE 1394 connector may not communicate to each other.

# Installing DVD Architect software

1. Place the DVD Architect application disc in the drive. The setup screen displays (if AutoPlay is enabled for your CD-ROM or DVD-ROM drive).

Note: If you have disabled the AutoPlay feature, click the Start button and choose Run. Type D:\setup.exe, where D is the drive letter of your CD-ROM or DVD-ROM drive, and follow the on-screen prompts to complete the installation.

2. Click Install, and then follow the on-screen prompts to install the appropriate version of DVD Architect for your computer..

Note: Windows Installer is used for all versions of Windows. Windows Installer is installed and then you are asked to restart your system.

#### **Getting help**

You can access two types of help within DVD Architect software:

- Online help
- Context-sensitive help.

#### Online help

To access online help, choose **Contents and Index** from the **Help** menu or press F1.

Note: To view online help, Internet Explorer 4.0 or later must be installed on your system. Internet Explorer 5.1 is included on the DVD Architect application disc for your convenience.



The following table describes the four tabs of the Online Help window.

Tab	Description
Contents	Provides a list of available help topics. Click a closed book 🎨 to open the pages, and then click on a
	topic page 🔃.
Index	Provides a complete listing of the help topics available. Scroll through the list of available topics or
	type a word in the Type in the keyword to find box to quickly locate topics related to that word.
	Select the topic and click the <b>Display</b> button.
Search	Allows you to enter a keyword and display all of the topics in the online help that contain the
	keyword you have entered. Type a keyword in the Type in the word(s) to search for box and click
	the List Topics button. Select the topic from the list and click the Display button.
Favorites	Allows you to keep topics that you revisit often in a separate folder. To add a topic to your favorites,
	click the Add button on the Favorites tab.

## Context-sensitive help

To use context-sensitive help in a dialog box, click the question mark button ? in the upper-right corner of the dialog box and then click an item in the dialog box.

#### Help on the Web


Additional DVD Architect software help and information is available on the Sony Media Software Web site. From the **Help** menu, choose **Sony on the Web** to view a listing of Web pages pertaining to DVD Architect software and Sony Media Software. The software starts your system's Web browser and attempts to connect to the appropriate page on the Sony Media Software site.

# **Chapter 2** Learning the DVD Architect Workspace

DVD Architect™ software is designed to make it easy to create a professional-looking DVD. Many of the editing operations, commands, and shortcut keys are common to other popular software applications, as well as other Sony Media Software applications.

#### Main window

When you start the application, the main window appears.

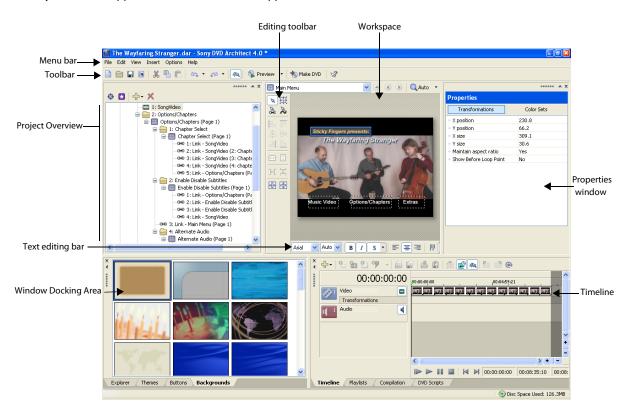

# Main window components

The work area is divided into four primary areas and is described in the following table.

Component	Description
Project Overview window	Where you assemble your project and can see the big pictures.
Workspace	Where you edit menus and pages.
Properties window	Where you edit properties for media and objects in your project.
Window Docking area	Where you find media, themes, buttons and backgrounds, and perform timeline editing on playlists,
	compilations, scripts, and titles in your project.

You can resize these sections by dragging the dividers between them or by pressing F11.

Press	Description
F11	Minimizes and restores the docking area at the bottom of the window.
Shift+F11	Maximizes and restores the left and right docking areas (Project Overview and Properties windows).
Ctrl+F11	Minimizes and restores the window docking area, Project Overview, and Properties windows.

# Toolbar


The main toolbar allows you to quickly access the most commonly used functions and features. To specify which buttons are displayed, choose **Customize Toolbar** from the **Options** menu. To toggle display of the main toolbar, choose **Toolbar** from the **View** menu.

	New Project: Creates new project.	Ê	Paste: Pastes items from clipboard into project.
	Open Project: Opens existing project.	470	Undo: Reverses the last command performed.
	Save Project: Saves the current project.	<i>6</i>	Redo: Reverses and Undo.
	Properties: Opens project properties.	邶	Enable Snapping: Enables snapping to grid lines.
*	Cut: Cuts selected events or time range.	<b>Q</b>	Preview: Shows or hides the Preview window.
-	Copy: Copies selected events or time range.	•	Make DVD: Opens the Make DVD wizard.

# Project Overview window (Ctrl+Alt+1)

The Project Overview window provides a high-level view of the menus and titles in your project. You can use this window to arrange the menus and titles in your project and add or delete titles.

To toggle the display of the window, choose Project Overview from the View menu.

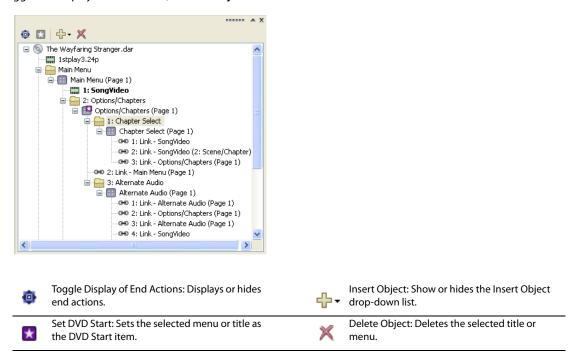


# Workspace (Alt+0)


The workspace is the portion of the DVD Architect window where you design your project. The workspace represents the currently selected menu or object.

To set input focus to the workspace, choose Focus to Workspace from the View menu.

Across the top of the workspace, there is a toolbar that helps you navigate through your project and zoom in/out of the DVD Architect workspace. Next Page

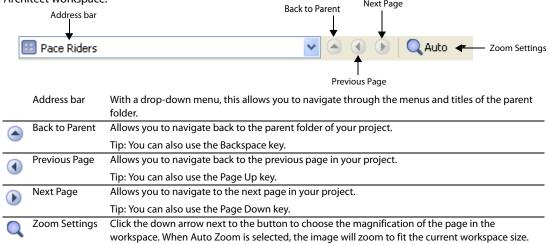

**Tip:** To browse a file's current location on your drive or network, right-click the file in the Explorer window or in the DVD Architect workspace and choose Explore Current Folder (or select the Video or Audio box in the Properties window, click the ▼| button, and then choose Explore Current Folder from the menu) to open the Windows Explorer. For more information, see Explorer window (Alt+3) on page 17.



# Editing toolbar (Alt+1)

The editing toolbar allows you to edit objects that you select in the workspace. To toggle display of this toolbar in the workspace, choose **Editing Toolbar** from the **View** menu.

B	Selection Tool: Selects and moves objects.		Align Right: Aligns all selected objects to the right edge of the object that has focus.
垂	Sizing Tool: Selects and resizes objects.	<u> </u>	Align Bottom: Aligns all selected objects to the bottom edge of the object that has focus.
250	Navigation Tool: Verifies and edits which buttons will be activated when you press Up, Down, Left, or Right buttons on the DVD player remote control.	<b>↔</b>	Make Same Width: Makes all selected objects the same width as the object that has focus.
8	Keyframe Tool: Inserts a keyframe. Keyframes are used to animate objects by cropping them or changing their size or position.	<b>‡</b>	Make Same Height: Makes all selected objects the same height as the object that has focus.
	Align Left: Aligns all selected objects to left edge of object that has focus.	]+-[	Space Across: Adjusts the selected objects so an equal amount of horizontal space exists between objects.
00	Align Top: Aligns all selected objects to the top edge of the object that has focus.	I	Space Down: Adjusts the selected objects so an equal amount of vertical space exists between objects.
\$	Align Horizontal Center: Aligns all selected objects to the horizontal center of the object that has focus.	<del>*[]*</del>	Horizontal Centering: Aligns selected objects to the horizontal center of the screen.
-{ o	Align Vertical Center: Aligns all selected objects to the vertical center of the object that has focus.	<b>‡</b>	Vertical Centering: Aligns selected objects to the vertical center of the screen.

# Text toolbar (Alt+2)

The text bar allows you to edit various properties for text objects you select in the workspace. To toggle the display of the text bar, choose **Text bar** from the **View** menu.

Arial 💌	Font: Allows you to choose the typeface that will be used for text.	===	Justify Right: Aligns text to right edge of text box.
22 🔻	Font Size: Allows you to choose the size (in points) of the typeface that will be used for text.	III	Justify Top: Aligns text to top edge of text box.
В	Bold: Sets text in bold typeface.	**************************************	Justify Vertical Center: Aligns text to vertical center of text box.
I	Italic: Sets text in italic typeface.	***************************************	Justify Bottom: Aligns text to bottom edge of text box.
S -	Shadow: Allows you to select position, color, and blurring of a shadow behind text.	•	Font Foreground Color: Allows you to set foreground color for text.
	Justify Left: Aligns text to left edge of text box.	Edit Text	Edit Text: Makes selected text box editable.
1000	Justify Center: Aligns text in center of text box.		

#### Window Docking Area (F11)


You can dock (anchor) windows around the edges of the DVD Architect window to keep frequently used windows available, but out of the way, while you are working with a project.

You can dock several windows in the same area of the screen and the windows will be layered. Click a window's tab to bring it to the top.

#### Explorer window (Alt+3)

The Explorer window is similar to the Windows® Explorer. Use the Explorer tab to select media files to drag to the workspace or Project Overview window. From the View menu, choose Explorer to show or hide the Explorer window.

You can also use the Explorer to perform common file-management tasks such as creating folders, renaming files and folders, and deleting files and folders. Use the Start Preview > and Auto Preview 🕏 buttons to preview files before adding them to the project. If you have the Auto Preview button selected, any video or graphic file you click in the Explorer will automatically display in the workspace.

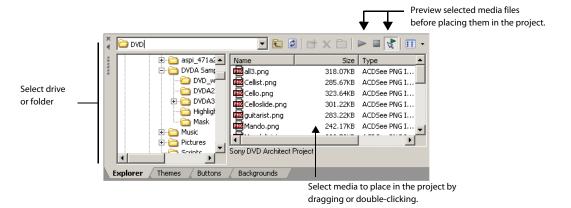

#### Themes window (Alt+4)

The Themes window is used to apply a theme to your menu-based project. From the View menu, choose Themes to show or hide the Themes window.

A theme is a style sheet for your DVD menu page. Each theme can contain a background image, button type, layout style, button behaviors, text style, and embedded navigation behaviors. You can apply themes to specific menu pages as you work. Each new page you add to that menu will default to using the same theme.

DVD Architect software includes some themes for you to use, and you can also create your own themes and apply them to your projects. For more information, see Working with themes on page 123.




Apply Theme: Allows you to apply themes to specific menu pages as you work.

Delete Theme: Allows you to delete your own custom themes.

#### **Buttons window (Alt+5)**

The Buttons window displays buttons that are available from installed themes and from your DVD Architect installation. From the **View** menu, choose **Buttons** to show or hide the Buttons window.


You can use the **Buttons** window to add new buttons to your menus, replace existing buttons, or remove frames from existing buttons.

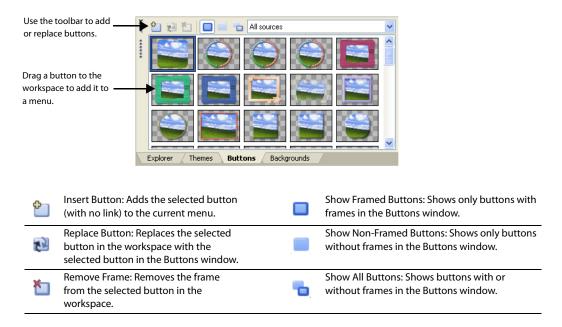

#### Backgrounds window (Alt+6)

The Backgrounds window displays menu backgrounds that are available from installed themes and from your DVD Architect installation. From the **View** menu, choose **Backgrounds** to show or hide the Backgrounds window.


You can use the **Backgrounds** window to add a background to a menu page or change an existing background.



#### Compilation window (Alt+7)

The Compilation window displays a listing of the items in a music compilation or picture compilation. From the View menu, choose Compilation to show or hide the Compilation window.


You can use this window to arrange the items in a compilation, set image stretching or scaling, rotate an image, or set a picture's display duration.

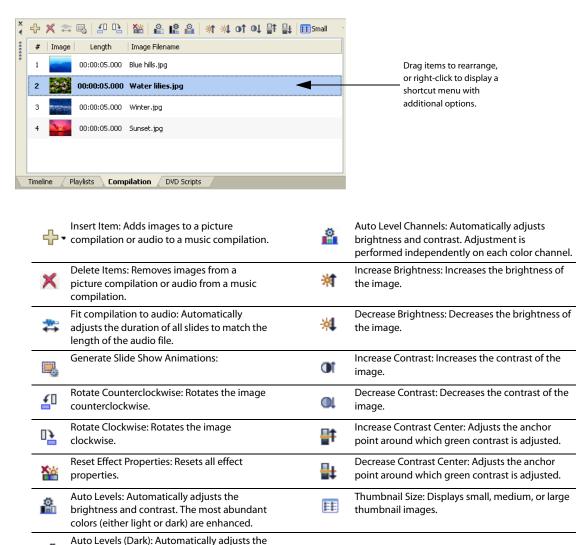

brightness and contrast. The least abundant colors (either light or dark) are enhanced.

#### Properties window (Alt+8)

The Properties window includes controls that you can use to edit nearly every detail of your project. From the View menu, choose **Properties** to show or hide the Properties window.




The contents of the Properties window change depending on the current selection. For example, if you have a menu open in the workspace, you can edit page properties and button properties. If you have a title open in the Timeline window, you can edit information about the media file.

Property	Description
Graphics	Edits the position, size, and appearance of graphical elements on a menu or compilation.
Button	Edits the action and appearance of the selected menu button.
Menu Page	Adjusts the length, background media, end actions, and remote control button behavior
	for the selected page.
Subtitle	Adjusts subtitle text positions and adjusts which color set is used to draw subtitle text.
Media	Adjusts the end actions and remote control button behavior for the selected media file.
Picture Compilation	Adjusts the end actions and remote control button behavior for the selected picture
	compilation.
Music/Video	Adjusts the end actions and remote control button behavior for the selected music/video
Compilation	compilation.
Playlist	Adjusts the settings for each item in a playlist or to set the end action for the selected
	playlist.
Video Event	Chooses the media file that will be used for events on the additional video tracks and
	adjusts color settings and cropping.
Script Properties	Adjusts settings for each statement in your DVD script.

# Timeline window (Alt+9)

The Timeline window is a chronological representation of a video, picture compilation, music/video compilation, or the background media for a menu. From the View menu, choose Timeline to show or hide the Timeline window.

The timeline displays your main audio and video tracks, subtitle and additional audio tracks, chapter markers, and transport controls you can use to preview your media within the DVD Architect workspace.



Insert Track: Shows or hides the ♣ Insert Track drop-down list.




Import Subtitles: Imports subtitles from a script file.

•4	Add Audio Track: Adds an audio track to the current file.		Export Subtitles: Exports subtitle content to a script file.
<b>O</b>	Add Video Track: Adds a video track to the current file.	4	Load Markers: Loads markers from a file.
Ф	Add Subtitle Track: Adds a subtitle track to the current file.		Save Markers: Saves markers to a file.
<b></b>	Insert Subtitle Text Event: Adds a subtitle text event to the selected track.	ď	Auto Ripple: Toggles Auto Ripple mode.
20	Insert Video Event: Adds a video event.	<b>₽</b>	Quantize to Frames: Forces events and markers to frame boundaries.
Ф	Insert Button: Inserts a button into the workspace.	****	Enable Timeline Snapping: Enables timeline snapping.
<b>O</b>	Insert Scene/Chapter Marker: Inserts a scene chapter marker.		Set In Point: Sets the in point for the title to the cursor position.
<b>O</b>	Insert Chapter Marker: Adds a chapter marker.		Set Out Point: Sets the out point for the title to the cursor position.
<b>O</b>	Insert Buttons on Video Marker: Inserts a button on video marker.	<b>@</b>	Set Loop Point: Sets the loop point to indicate the point where looped playback begins.
77	Generate Music: Allows you to generate music for your project using Cinescore™.		

### Playlists window (Ctrl+Alt+2)

You can use playlists to play a sequence of movies, chapter markers, music compilations, or picture compilations. A playlist can contain only titles that are part of the DVD project, which are played from start to finish, and an end action determines what happens at the end of the playlist. From the **View** menu, choose **Playlists** to show or hide the Playlists window. For more information, see **Playlist properties** on page 94.

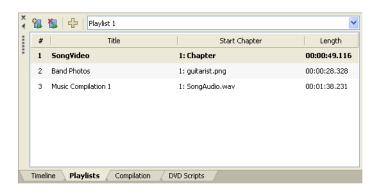

鸖	Insert Playlist: Adds a new playlist to your project.	Current Allows you to choose the playlist that you want playlist to display.
齫	Delete Playlist: Removes the current playlist from your project.	Playlist Lists the titles in the playlist. item list
<b></b>	Insert Playlist Items: Displays the Select Title dialog where you can add titles to the current playlist.	

#### DVD Scripts (Ctrl+Alt+3)

From the **View** menu, choose **DVD Scripts** to display the DVD Scripts window. You can use the Script Properties controls in the Properties window to adjust settings for each statement in your DVD script.

Scripting in DVD Architect gives you even more options for creativity when designing your DVD. Among other things, you can customize the play order of your DVD, create simple games, and add navigation clues. The scripting feature in DVD Architect is based on the DVD-Video specification..



Item		Description
協	Insert DVD Script	Click to add a new DVD script to your project. For more information, see Creating a script on page 130.
鼻	Delete DVD Script	Click to remove the current script from your project
<b></b>	Insert Statement	Click to add a statement to your script. The Script Properties information is displayed in the Properties window, allowing you to choose your statement type and construct your statement.
4	Append Statement	Click to add a statement to the end of your script. The Script Properties information is displayed, allowing you to choose your statement type and construct your statement.
×	Delete Statement	Click to remove the selected statement(s) from your script.
	Toggle Breakpoint	Click to insert a breakpoint to the currently selected command(s) or label(s) in the script.
DVD scripts list		Choose an existing script from the drop-down list to specify the script you want to display.
Script statement list		Lists the statements in the script. You can drag statements within this area to rearrange them. You can use the Script Properties controls to set the statement type, commands, and conditions.

**Note:** Breakpoints are useful for debugging scripts. In the preview mode, breakpoints suspend playback and display the debugger area in the lower-left corner of the preview window, allowing you to step through the script in a certain area and then resume playback.

# **Chapter 3** Getting Started

This chapter details what you need to know to start authoring your DVD using DVD Architect™ software.

#### How it works

The basic process for creating a DVD is essentially the same regardless of the type of project you choose to create. The steps listed below are discussed in more detail in the following sections:

- Start a new project and specify the type of project you want to create (menu based, music/video compilation, picture compilation, or single movie).
- 2. Choose and add your media.
- **3.** Preview your project.
- 4. Save your project.
- **5.** Prepare and burn your DVD.

# Preparing files for DVD Architect software

To ensure that your DVD preparation and burning process goes smoothly, you should attempt to save your media files in the supported formats prior to bringing them into your DVD Architect project. DVD Architect software supports a wide variety of file formats, but some will require transcoding or recompression by the DVD preparation process, lengthening the amount of time needed to complete this operation, and possibly resulting in degradation of quality. For more information, see Choosing your media files on page 25.

The following files will not require recompression if encoded with proper parameters: MPEG-2, PCM, and AC-3.

**Note:** The Sonv Media Software AC-3 and MainConcept™ MPEG-2 encoders provide templates that, if used without any modifications, result in files that do not require any recompression (unless the file size is too large to fit on a DVD).

The precise settings to produce MPEG-2, PCM, and AC-3 files that do not require recompression follow.

#### AC-3 audio (.ac3)

Number of channels: stereo or 5.1 surround Bit rate: 64 kbps to 448 kbps inclusive

PCM audio (.wav)

**Sample size:** 16, 20, or 24 bit Sample rate: 48 or 96 kHz Number of channels: stereo Compression: uncompressed

#### NTSC MPEG video (.m2p, .mp2, .mpg, .mpeg)

If you're using the MainConcept MPEG-2 encoder in Vegas® software, use the DVD Architect NTSC video stream or DVD Architect 24p NTSC video stream template to render your video stream (you'll need to render your audio stream separately according to the parameters listed in the AC-3 audio or PCM audio sections above).

Aspect ratio and frame resolution:

Aspect Ratio	Frame Size
4:3	720x480
4:3	704x480

Aspect Ratio	Frame Size
4:3	352x240
4:3	352x480
16:9	720x480
16:9	704x480

Frame rate: 29.97 fps or 23.976 fps + 2-3 pulldown

Maximum GOP (group of pictures): 36

Maximum bit rate: 9.8 Mbps

No low delay

#### PAL MPEG video (.m2p, .mp2, .mpg, .mpeg)

If you're using the MainConcept MPEG-2 encoder in Vegas software, use the **DVD Architect PAL video stream** or **DVD Architect PAL Wideo stream** template to render your video stream (you'll need to render your audio stream separately according to the parameters listed in the *AC-3 audio* or *PCM audio* sections above).

Aspect ratio and frame resolution:

Aspect Ratio	Frame Size
4:3	720x576
4:3	704x576
4:3	352x576
4:3	352x288
16:9	720x576
16:9	704x576

Frame rate: 25 fps

Maximum GOP (group of pictures): 30

Maximum bit rate: 9.8 Mbps

No low delay

# Starting a new project

You can design a DVD as simple or as complex as you'd like, consisting of stills, video, and audio. Organization of these components is an important piece of the creation process. In the software, organization is handled by a project file (\*.dar) that saves the relevant information about source file locations, insertion points, chapters, text, and more. This project file is not a multimedia file, but is instead used to create the final product when your editing is finished.

- 1. From the File menu, choose New. The New Project dialog is displayed.
- 2. On the General tab, click the type of project that you want to create:

Type of project		Description
	Menu Based	Produces a DVD that displays a menu when played in a DVD player. Users can move through the menu items and select what they'd like to view. You can use any kind of media to a menu-based DVD. In addition, you can add multiple menus and titles (music compilations, picture compilations, and movies). For more information, see Creating a Menu-Based DVD on page 39.
<b>O</b>	Music/Video Compilation	Produces a DVD containing a compilation of audio files. You can choose a still image or video to associate with each audio file. Music or video compilations contain no menus, but users can skip forward and backward through audio tracks using their DVD remote control. For more information, see Creating a Music/Video Compilation on page 75.
	Picture Compilation	Produces a DVD that displays a slideshow of still images. You can choose one background audio track to play while the pictures are displayed. Picture compilations contain no menus, but users can skip forward and backward through pictures using their DVD remote control. For more information, see Creating a Picture Compilation on page 83.

Type of project		project	Description
		Single Movie	Produces a DVD containing a single movie. Single movies contain no menus or other media (aside from introductory video/audio, if desired). For more information, see Creating a Single-Movie DVD or Title on page 97.

- 3. Choose the appropriate video setting from the Project video format drop-down list. This format is used for video that must be recompressed and for all menus in your project. For more information, see Adjusting video recompression settings on page 35.
- 4. Choose the appropriate audio setting from the Project audio format drop-down list. This format will be used for audio files that require recompression. For more information, see Adjusting audio recompression settings on page 36.
- 5. If your projects typically use these settings, select the **Start all new projects with these settings** check box.

**Note:** The project settings you chose in the New Project dialog can be changed at any time while you are working on a project, with the exception of the type of project you chose to create. To change any of these settings, choose **Properties** from the **File** menu.

6. Click the Summary tab, and complete the information in the fields as desired. This information is saved with the project.

Field	Description
Title	Enter the title of the project.
Artist	Enter the name of the artist who performed in the project.
Engineer	Enter the name of the person who mixed or edited the project.
Copyright	Enter copyright information about the project.
Comments	Enter any comments you want to associate with the project.

We recommend saving your project at regular intervals to avoid loss of work due to system failure or power outages. For more information, please see Saving your project on page 38.

# Opening an existing project

- 1. From the File menu, choose Open. The Open dialog is displayed.
- 2. Locate and select the project (.dar) file you want to open.
- 3. Click the Open button.

Tip: If media files cannot be located when you open a project, you can choose to leave the media offline and continue to edit your project. If you restore the source media file at a later time, the project will open normally.

# Choosing your media files

You can use the Explorer window to find and add media files to your project. DVD Architect software supports a wide variety of media files. You may add any of the following media file types to your project:

Format	Extension	Definition
AC-3	.ac3	Encoded Dolby® Digital surround or stereo sound format.
ATRAC	.aa3, .oma	A Sony proprietary audio compression technology.
GIF	.gif	256 index color, lossless image and animation format widely used on the Internet.
JPEG	.jpg	True color, lossy Internet image format.
Macintosh AIFF File	.aif	Standard audio format used on Macintosh® computers.
MPEG-1 and MPEG-2	.mpg	MPEGs, files compressed using a lossy audio/video compression method, can be used with DVD Architect software.
MPEG Layer 3	.mp3	Highly compressed audio file.
Ogg Vorbis	.ogg	A patent-free audio encoding and streaming technology.
Photoshop	.psd	Adobe® Photoshop® proprietary image format (flattened).

Format	Extension	Definition
Portable Network Graphic	.png	True color or indexed color, lossy or lossless Internet image format that supports alpha
		channel transparency.
QuickTime	.mov, .qt	QuickTime™ standard audio/video format used on Macintosh® computers.
Sony Perfect Clarity Audio	.pca	Sony proprietary lossless audio compression format.
Sony Wave 64	.w64	Sony proprietary Wave64™ audio file that does not have a limited file size (unlike Windows
		WAV files that are limited to ~2GB).
TARGA	.tga	True color, lossless image format that supports alpha-channel transparency.
TIFF	.tif	Tagged Image File Format, a common bitmap format. You must have QuickTime installed to
		use TIFF files in DVD Architect software.
Video for Windows	.avi	Standard audio/video format used on Microsoft® Windows-based computers.
Wave (Microsoft)	.wav	Standard audio format used on Microsoft Windows-based computers.
Windows Bitmap	.bmp	Standard graphic format used on Microsoft Windows-based computers.
Windows Media Audio	.wma	The Microsoft audio-only format used to create files for streaming or downloading via the
		Web.
Windows Media Format	.wmv	The Microsoft standard used for streaming audio and video media via the Web.

**Note:** DVD Architect software includes support for many file types and can convert your media to the formats required for DVD as needed. However, for best performance (decreased disc preparation time and recompression), use existing rendered files. For more information about the types of files that can be used without recompression, see <u>Preparing files for DVD Architect software</u> on page 23.

# **Using Explorer window views**

You can control the information that is displayed in the Explorer window by clicking the **Views** button **III** and selecting a view.

View	Description
Tree View	Displays all of the available drives and folders that you may choose from to find files.
Summary View	Displays everything shown in the <b>Tree View</b> , but adds an area below the file list where summary information for the selected file is displayed, such as the file type and properties.
Details	Displays all the properties for each file. The information is presented in a table format. You can sort the files according to a category by clicking the column label for that category.
All files	Displays all file types in the selected folder.

#### Downloading media from the Web

You can also download media files from the Web for use in your project.

- 1. From the **File** menu, choose **Get Media from the Web**. Your Web browser starts and attempts to connect to the Internet.
- 2. Search for and download files to use in your project.

# Previewing media files

You can preview media files from the Explorer window at any time before adding them to your project. To do so, simply click once on the file to select it, and then click the **Start Preview** button ■. To stop the preview, click the **Stop Preview** button ■.

#### Adding files to your project

Once you've located a file you want to use, add it to the project using one of the following methods:

- Double-click the file.
- Drag the file from the Explorer window to the DVD Architect workspace.
- Drag the file from the Explorer window to a menu in the Project Overview window.
- Drag a file from the Explorer window to the root folder in the Project Overview window. Dragging a file to the root folder adds the media to your project without creating a button on a menu.

You can use this unassociated media as a transition between menus via end actions or as a destination for button actions or the Menu button on the remote control.

**Note:** If you have a display device that is susceptible to burn-in (such as a rear-projection television), do not use static text or bright static graphics in any scene that will be displayed on screen for an extended period of time.

# Setting the DVD start item

The DVD start item is the item that plays by default when your disc is played in a DVD player. In a menu-based DVD, for example, the main menu is typically your start item.

- 1. Select an object in the Project Overview window.
- 2. Click the Set DVD Start Item button 🚺. The start item is displayed as a 🔛 if it is an object and as a 🔠 if it is a menu.

# Setting the DVD introduction (first play) media

Use the Insert Introduction Media 🚼 to choose a media file that you want to use as your DVD start item.

You could use introduction media to add copyright information or a corporate logo that is displayed before your DVD content begins.

- 1. Select an object in the Project Overview window.
- 2. Click the Insert Introduction Media button 12. The Introduction Media is displayed as a 🔛 in the Project Overview window.

# Setting your project properties

When you start a new project, you select various properties for the project. However, if you need to view those properties or make changes to them while you're working on the project, you can do so at any time by choosing Properties from the File menu. The Project Properties dialog is displayed containing two tabs: Properties and Summary.

If your projects typically use the same settings, select the Start all new projects with these settings check box at the bottom of the dialog.

#### Disc properties

#### Video format

You can adjust the video setting in the Video format drop-down. The video format determines the following information about your project:

- Whether a disc is NTSC or PAL. You cannot use both NTSC and PAL content on the same disc.
- The default frame size and aspect ratio for media that will be recompressed. You can use the **Optimize DVD** dialog to choose distinct recompression settings for each media file. For more information, see Optimizing your project on page

• The frame size and aspect ratio of all menus. All menus must use the same aspect ratio and resolution.

**Tip:** The television frame rate in the US, North and Central America, parts of South America, and Japan (NTSC) is 29.97 frames per second (fps). In many parts of the world, including Europe and much of Asia, the television standard is PAL at 25 fps. France, Russia, and most of Eastern Europe use SECAM, which is a variation on PAL and also uses 25 fps.

#### **Audio format**

You can adjust the audio setting in the **Audio format** drop-down list. The audio format determines the format that will be used for audio that will be recompressed. You can select a title and use the **Audio** settings in the **Optimize DVD** dialog to choose distinct recompression settings for each media file.

#### Target media size

Choose a setting from the drop-down list to specify the capacity of your DVD media. This setting will be used to calculate how much space is available on disc.

**Tip:** You can also change this setting by right-clicking the free space display in the bottom-right corner of the DVD Architect window and choosing a command from the shortcut menu.

#### Last prepare folder

Displays the path to the folder that was most recently used to prepare your project. For more information, see Preparing your project on page 141.

#### Last mastering output folder

Displays the path to the folder that was most recently used to master your project. For more information, see Burning multiple copies on page 145.

#### Extras folder

If you want to burn DVD-ROM content to your disc, type the path to the folder that contains the files you want to include (or select the box and click the **Browse** button ... to choose a folder).

When you choose a folder, all files within that folder will be written to the root of your DVD. If you want to place the content in a subfolder at the root of the DVD, create a subfolder within your specified extras folder:

- For example, if c:\media\extras\ is your extras folder, all files within c:\extras will be written to the root of the DVD.
- For example, if c:\media\extras\ is your extras folder, you could place the files you want to burn in a
  c:\media\extras\DVD-ROM subfolder so that DVD-ROM folder and its contents would be written to the root of
  the DVD..

**Note:** You can add any type of files or subfolder to the Extras folder, but this content will only be available when browsing the disc on a computer.

Click the **Change Media** button **...** to browse to a folder.

Click the **Clear Media** button **\textstyle 1** to remove a folder.

#### Jacket picture

The jacket picture feature allows you to specify a still image that will display when the Stop button has been pressed on the DVD player's remote control.

Commercially produced discs often use an image of the DVD cover (hence the name), but you can use any image.

Click the **Change Media** button **...** to browse to a folder.

Click the Clear Media button 🔀 to remove the location of the still image.

**Note:** *Not all DVD players support the jacket picture feature.* 

#### Initial audio track

You can adjust the audio stream in the Initial audio track drop-down list on the Disc Properties page. This determines which audio stream will be played when the DVD is inserted into the DVD player.

#### **Notes:**

- If you choose **Default**, the DVD player will attempt to determine the appropriate default audio track. If the player cannot determine the correct language, the first track is used. If multiple tracks match the player's language setting if you have an English dialogue track and an English commentary track, for example the first track that matches the player's language is used. The viewer can choose which track is played during playback.
- If you choose a track that does not exist in your project, the initial track will default to the first audio track.

#### Initial subtitle track

You can adjust the subtitle stream in the Initial subtitle stream drop-down list on the Disc Properties page. This determines which subtitle stream will be played when the DVD is inserted into the DVD player.

#### Notes:

- If you choose **Default**, the DVD player will attempt to determine the appropriate default track. If the player cannot determine the correct language, the first track is used. If multiple tracks match the player's language setting, the first track that matches the player's language is used. The viewer can choose which track is played during playback.
- If you choose a track that does not exist in your project, the initial track will default to the first subtitle track.

#### Initial video angle

You can adjust the video angle in the Initial video angle drop-down list on the Disc Properties page. This determines which video angle that will be played when the DVD is inserted into the DVD player.

#### Notes:

- If you choose Default, the DVD player will attempt to determine the appropriate default track. The viewer can choose which track is played during playback.
- If you choose a track that does not exist in your project, the initial track will default to the first audio track.

#### **DVD** start script

If you want to specify the start script that will be executed when your DVD is played in a DVD player, click the box and choose an available script from the drop-down list. If you have not yet created any scripts, the only available option will be **None**. For more information, see DVD Scripts (Ctrl+Alt+3) on page 22.

**Note:** The start script will execute prior to any item designated as the DVD start item in your project.

#### Parental control

You can restrict the DVD's playback by selecting the parental controls (ratings) set by the Motion Picture Association of America (MPAA).

Option	Description
Off	There are no parental controls.
1 (G)	General audiences. All ages may watch the content.
2	
3 (PG)	Parental guidance suggested. Some content may not be suitable for children.
4 (PG-13)	Parents strongly cautioned. Some content may be inappropriate for children under age 13.
5	
6 (R)	Restricted. No children under age 17 should watch this content without a parent or adult guardian
	present.
7 (NC-17)	No one aged 17 and under should watch the content.
8	

#### **Disc Labels**

This is optional information that could be included in the disc file system.

Option	Description
Application ID	Identifies the application. Sony DVD Architect is the default entry.
Volume Name	Enter the DVD volume name.
	Note: The volume name is limited to 32 characters and can only contain capital letters (A-Z), digits (0-9), and underscore (_). DVD Architect will automatically correct text that does not comply with these rules.
Volume Set Name	Enter the name of a set of volumes.
	Note: The volume set name is limited to 59 characters.

# **Copy protection**

You can use the following controls to secure DVD content.

**Note:** DVD Architect software only set the CSS and Macrovision flags; the encryption must be added by the mastering or replication facility.

#### Disc copyrighted

Indicates whether the project contains copyrighted material.

Option	Description
Yes	Choose if your DVD project contains copyrighted material. You can then set the number of
	allowed copy generations and whether you want to use CSS and Macrovision.
No	Choose if your DVD project does not contain copyrighted material. When No is selected, you cannot set the number of allowed copy generations or use CSS or Macrovision.

#### Copy generations (CGMS)

If you indicated that your DVD project contains copyrighted material, then you can use the **Copy generations** drop-down list to set a flag that indicates whether you want to allow your DVD to be copied by DVD recorders and some personal video recorders (PVRs).

Option	Description
Unlimited	There is no limit on the number of copies that can be made; the DVD can be copied, and those copies can be copied.
One	Single-generation copies can be made; the DVD can be copied, but those copies cannot be copied.

Option	Description
None	No copies can be made.
	Note: You can optionally use CSS and Macrovision protection.

Note: The CGMS (content generation management system) protection flag may not be recognized by all PVRs or personal computers.

#### CSS

Allows you to set the CSS (Content Scramble System) flag on your disc.

Option	Description
On	Sets a flag that tells the DVD replication facility to apply CSS digital encryption to the disc to prevent duplication.
Off	Sets a flag that indicates that CSS digital encryption should not be applied during replication.

#### Macrovision

Allows you to set the Macrovision Analog Copy Protection (ACP) system flag on your disc.

Option	Description
Off	Sets a flag that tells the DVD replication facility that Macrovision copy protection should not
	be encoded.
Туре I	Sets a flag that tells the replication facility to add Automatic Gain Control (AGC). ACG adds
	pulses during the vertical blanking intervals that distort the picture when a user attempts to
	make an analog copy.
Type II	Sets a flag that tells the replication facility to add AGC and a two-line Colorstripe.
Type III	Sets a flag that tells the replication facility to add AGC and a four-line Colorstripe.

### Regions

Region coding is how Hollywood studios stagger DVD movie releases across the planet. These codes ensure that one country doesn't get a DVD movie before the same movie is out in that country's theatres. You can determine the regions in which the DVD can be played. Select Yes or No from the drop-down list.

**Note:** Region information is not encoded on DVDs you burn with DVD Architect software; the software sets a region flag that is encoded by a replication facility.

Option	Description
All regions	Choose <b>Yes</b> from the drop-down list if you want to be able to play your DVD in any DVD player regardless of geographical location.
	Choose ${\bf No}$ if you want to be able to allow or prevent playback for specific regions.
Region 1	Allows or prevents playback of your DVD in North America.
Region 2	Allows or prevents playback of your DVD in Japan, Europe, Middle East,
	Egypt, South Africa, and Greenland.
Region 3	Allows or prevents playback of your DVD in Southeast Asia (including Hong
	Kong).
Region 4	Allows or prevents playback of your DVD in Australia, New Zealand, Central/
	South America, Pacific Islands, and Caribbean.
Region 5	Allows or prevents playback of your DVD in Northwest Asia (including
	Korea), and North Africa.
Region 6	Allows or prevents playback of your DVD in China.
Region 7	Reserved
Region 8	Allows or prevents playback of your DVD in Airplanes (In-Flight
	Entertainment).

## Mastering

#### **Output format**

Allows you to specify the file format used when writing mastering files.

Option	Description
DDP 2.00	DDP (Disc Description Protocol) 2.00 is widely supported by replication facilities. This format supports CSS copy protection and region coding.
DDP 2.10	Similar to DDP 2.00, but slightly more advanced. This format supports CSS copy protection and region coding.
CMF 1.0	CMF (Cutting Master Format) supports CSS and region coding.

# **DVD-ROM** type

Choose the type of DVD-ROM you are mastering:

Option	Description
DVD-1 (1.4 G)	8-cm, single-sided, single-layer DVD with a capacity of approximately 1.4 GB.
DVD-2 (2.7 G)	8-cm, single-sided, single-layer DVD with a capacity of approximately 2.7 GB.
DVD-3 (2.9 G)	8-cm, double-sided, single-layer DVD with a capacity of approximately 2.9 GB.
DVD-4 (5.3 G)	8-cm, double-sided, double-layer DVD with a capacity of approximately 5.3 GB.
DVD-5 (4.7 G)	12-cm, single-sided, single-layer DVD with a capacity of approximately 4.7 GB.
DVD-9 (8.5 G)	12-cm, single-sided, double-layer DVD with a capacity of approximately 8.5 GB.
DVD-10 (9.4 G)	12-cm, double-sided, single-layer DVD with a capacity of approximately 9.4 GB.
DVD-18 (17 G)	12-cm, double-sided, double-layer DVD with a capacity of approximately 17 GB.

#### **Number of sides**

Allows you to specify the number of sides (one-sided or two-sided) that the mastered DVD will contain.

#### **Current side**

Allows you to specify for which side you're currently creating master files.

**Note:** Available only when the Number of sides is 2.

#### **Number of layers**

Allows you to specify the number of layers that the mastered DVD will contain.

Option	Description
1	Choose if your project will be burned to a single-layer DVD.
2	Choose if your project will be burned to a dual-layer DVD.

#### **Direction of translation**

Allows you to specify the direction in which reading will occur on the second layer of a dual-layer disc.

**Note:** Available only when the specified number of layers is 2. The first layer is always read from the inner radius of the disc to the outer radius.

ltem	Description
Parallel track path	Read from the inner radius of the disc to the outer radius.
	<b>Note</b> : When the laser reaches the end of the first layer, it must move back to the inner radius and then refocus on the second layer.
Opposite track path	Read from the outer radius of the disc to the inner radius.
	<b>Note</b> : When the laser reaches the end of the first layer, it must move back to the inner radius and then refocus on the second layer

### Disc diameter

Allows you to choose the physical diameter of the mastered DVD.

### **Advanced**

The DVD-ROM capacity (sectors) field allows you to adjust the number of sectors on the DVD-ROM to match manufacturing requirements. Click in the field and move the slider left or right to decrease or increase the sector capacity.

### **Customer information**

Allows you to include or omit optional customer information, which can be included with mastering output.

Note the following output format information:

- The DDP 2.00 output format does not support customer information.
- · Customer information is optional when using the DDP 2.10 output format.
- The CMF 1.0 output format requires customer information. You can, however, save blank customer information fields with the master.

Option	Description
Content owner	The owner or copyright holder of the media contained on the disc.
Content category	Type up to eight letters to identify the contents of the disc.
Disc ID	Type a unique identifier for the disc. This ID is for use by the content owner and can use any format.
Title name	The title of the disc.
Customer	Information about the customer for whom the disc is being
	produced.
Authoring studio	Information about the studio that created the contents of the disc.
Disc set number	If the disc is from a multidisc collection, use this setting to identify
	the disc. For example, if this disc is part two of a three-part series,
	type 2 in this box.
Maximum set number	If the disc is from a multidisc collection, use this setting to identify
	the number of discs in the series. For example, if this disc was part
	of a three-part series, type 3 in this box.
Memo	Type any additional comments in this section.

### Summary tab information

The boxes on the Summary tab provide a place to enter information about the project, if desired. This information is stored with the DVD Architect project.

Field Name	Description
Title	Enter the title of the project.
Artist	Enter the name of the artist who performed in the project.
Engineer	Enter the name of the person who mixed or edited the project.
Copyright	Enter copyright information about the project.
Comments	Enter any comments you want to associate with the project.
Start all new projects with these settings	Select this check box to use the current dialog settings as the default.

Click the **OK** button to save any changes.

# **Optimizing your project**

To display the Optimize DVD dialog, choose **Optimize DVD** from the **File** menu. You can use this dialog to optimize your project before burning or mastering to identify and correct potential problems or to force recompression to specific formats. Using the Optimize DVD dialog, you can perform the following actions:

- · View the estimated project and individual media file sizes.
- · View and change project and file format settings.
- Verify which media files will require recompression during the DVD preparation process:
  - ✓ indicates a file is compliant (requires no recompression).
  - indicates a file requires recompression (yellow).
  - indicates some files are compliant and some files require recompression (green).
  - indicates you have specified to force recompression (red) (see below for information).

**Note:** If a media file's format does not match the project format, the media file will be re-encoded during the preparation process. For example, if your media file is 4:3 MPEG-2 and your DVD Architect project is 16:9, the file will be re-encoded.

To determine the best file format settings for your use, see Preparing files for DVD Architect software on page 23.

### Determining whether menus and titles are compliant

Use the guidelines below to determine whether your menus and titles will require recompression during the DVD preparation process.

#### Menus

Menus always use the settings from the **Project video format** and **Project audio format** controls. All menus use the same audio format, aspect ratio (16:9 or 4:3), and frame size, but you can mix frame rates for menus within a single project.

A menu's video will not be recompressed if it meets the following requirements:

- Any background video must match the Project video format setting.
- No graphics can be added to the menu.
- Buttons must use highlighting only. Using button thumbnails or text will require recompression.

A menu's audio will not be recompressed if its background audio matches the Project audio format setting.

If a menu requires recompression, it will be recompressed using the **Project video format**, **Project audio format** and the **Frame rate setting** from the Recompress settings section of the Optimize DVD dialog.

### Media files

Media files will not be recompressed if rendered in a compliant format. For more information, see Preparing files for DVD Architect software on page 23.

If a media file requires recompression, it will be recompressed using the **Project video format** and **Project audio format** settings. You can select a media file in the Optimize DVD dialog and use the controls in the Recompress settings section to override the default project formats.

### Music/video compilations

A music compilation's video will not be recompressed if it meets the following requirements:

- · Any background video or images must match the Project video format setting.
- · No graphics can be added to the compilation.

The audio will not be compressed if it matches the **Project audio format** setting.

If a music compilation requires recompression, it will be recompressed using the Project video format and Project audio format settings. You can select a music compilation in the Optimize DVD dialog and use the controls in the Recompress settings section to override the default project formats.


#### Picture compilations

The video portion of a picture compilation is always recompressed using the Project video format setting, but you can select a music compilation in the Optimize DVD dialog and use the controls in the Recompress settings section to override the default video format.

The audio will not be recompressed if it is rendered in any compliant audio format. If the audio requires recompression, it will be recompressed using the Project audio format setting. You can select a picture compilation in the Optimize DVD dialog and use the controls in the Recompress settings section to override the default audio format.

#### Using the Optimize DVD dialog to fine-tune your project

To display the Optimize DVD dialog, choose Optimize DVD from the File menu. Each menu and title in your project is displayed on the left side of the dialog with the estimated size of each item and an indication of whether the item will be recompressed.

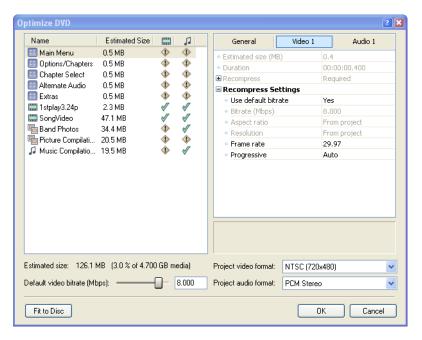

### Adjusting video recompression settings

- 1. Select a menu or video title from the list.
- 2. Click the Video 1 button video 1 to display the controls. Information about the video format of the selected item is displayed. If your title has multiple video tracks, a separate Video button is displayed for each track.

**Note:** If the video is already compliant, you need to select the **Recompress** control, click the **▼** button, and choose **Yes** from the menu to edit its recompression settings.

- 3. Click the 🗐 next to the Recompress Settings heading to expand the controls if they are not already expanded.
- **4.** Select the **Use default bitrate** box and click the **v** button to display a menu.

Option	Description
Yes	Choose if you want the selected video to use the bitrate from the Default video bitrate slider
	at the bottom of the Optimize DVD dialog.

Option	Description
No	Choose if you want to specify a custom bitrate for the selected video. You can then select the
	Bitrate (Mbps) control to specify the bitrate you want to use. Type a number in the box, use
	the spin control, or click the 💌 to display a slider you can use to adjust the bitrate.

5. Select the Aspect ratio control, click the v button, and choose a command from the menu if you want to choose a new video format for the recompressed video.

**Note:** This control is not available when a menu is selected. All menus in a project must have the same aspect ratio and resolution. Use the **Project video format** drop-down list to control the aspect ratio and resolution of your project's menus.

If	Then
You choose From project	The setting from the <b>Project video format</b> drop-down list at the
	bottom of the dialog is used.
You choose a widescreen video format	Your video will be displayed in 16:9 on a widescreen television and will
	be letterboxed on a normal television.

**6.** Select the **Resolution** control, click the velocities button, choose a setting from the menu to change the frame size of the recompressed video.

**Note:** This control is not available when a menu is selected. All menus in a project must have the same aspect ratio and resolution. Use the **Project video format** drop-down list to control the aspect ratio and resolution of your project's menus.

- 7. Select the Frame rate control, click the button, and choose a command from the menu if you want to change the frame rate of the recompressed video.
- **8.** Select the **Progressive** control, click the button, and choose a setting from the menu to indicate whether you want to render the title or menu as progressive-scan video.
  - Choose **Yes** to recompress a menu or title as progressive-scan video.
  - Choose No to recompress a menu or title as interlaced video.
  - Choose **Auto** to allow the software to determine the appropriate format: if the source media is progressive-scan video, the video or title will be recompressed as progressive; if the source media is interlaced, the video or title will be recompressed as interlaced

When you choose **Auto** for a music/video compilation, each compilation item is recompressed as a separate title and will match the format of the source media. If the audio is longer than the video, the compilation item will be recompressed as progressive-scan video to prevent artifacts when the last frame is held.

**Tip:** If you use a background video in your menu, we recommend rendering the video in progressive-scan format before adding it to your project. Leave the **Progressive** setting at **Auto**, and the noncompliant menu will be rendered as progressive-scan video. Progressive-scan menus will provide the sharpest-looking text and highest level of DVD player compatibility.

If you need to use interlaced video as a menu background, choose **No** from the menu. When you choose **No**, the noncompliant menu will be rendered as interlaced video.

#### Adjusting audio recompression settings

- 1. Select a menu or audio file from the list.
- 2. Click the Audio 1 button Audio 1 to display the controls. Information about the audio format of the selected item is displayed. If your title has multiple audio tracks, a separate Audio button is displayed for each track.

**Note:** If the audio is already compliant, you need to select the **Recompress** control, click the button, and choose **Yes** from the menu to edit its recompression settings.

3. Click the  $\pm$  next to the **Recompress settings** heading to expand the controls if they are not already expanded.

4. Select the Type box and click the 💟 button to display a menu. Choose a setting from the menu to determine the file type that will be used to recompress the selected file.

#### Adjusting project-wide settings

The area at the bottom of the Optimize DVD dialog shows information about your project. The Project video format and Project audio format settings from the Project Properties dialog are displayed, and your project size is estimated based on these formats and the **Default video bitrate** setting.

- 1. Drag the **Default video bitrate** slider or type a value in the edit box to adjust the size of your DVD project:
  - The maximum setting of 9,800 represents the maximum bitrate for DVD players.
  - Increasing the bit rate can improve quality, but you can fit less media on the disc.
  - Decreasing the bit rate can allow you to fit more video on the disc, but quality will be decreased.
- 2. To change the video format of your project, choose a setting from the Project video format drop-down list. For more information about this setting, see Video format on page 27.
- 3. To change the audio format of your project, choose a setting from the Project audio format drop-down list. For more information about this setting, see Audio format on page 28.
- If you want to automatically adjust the project video bit rate, click the Fit to Disc button to fit a project that is greater than 4.7 GB on your disc.

**Note:** Only video that requires recompression will be adjusted. When your project cannot be made to fit on a disc, you can change the video settings so all titles and menus will be recompressed, or you can remove video from your project.

## Editing a media file's source project

When your DVD Architect project uses source media files that are rendered with an embedded project path reference, you can easily open the source project from the Explorer window in the associated application if you need to edit the media. By saving your project path reference when you render files in ACID 5.0, Sound Forge 8.0, or Vegas 6.0, you can quickly access the media from DVD Architect via the Edit Source Project shortcut menu.

**Note:** The project information in the rendered file is only a reference to a project file. If you modify the source project file after rendering, the project data will no longer match the rendered file. To edit a project using a path reference, the project file and all media must be available on your computer.

- 1. Right-click a media file in the Explorer window.
- 2. From the shortcut menu, choose Edit Source Project. An ACID, Vegas, or Sound Forge window will open with the source project.

If you are editing a source project using a computer other than the computer where the project was created, then the editing computer must meet the following requirements:

- The software that was used to create the project must be installed and the project file extension (.acd, .acd-zip, .veg, or .frg) must be registered on the editing computer.
- The editing computer must have the same version (or later) of the software as the computer where the project was created.
- The project file must exist on the editing computer using the same file path as on the computer where the project was created.
- The project's source media must exist on the editing computer. If the media files do not use the same file path as on the computer where the project was created, you will be prompted to choose a new folder or replacement
- **3.** Edit the project as necessary.
- 4. Render the edited project using the same name as the original media file and close the editing application.

**Note:** If you are editing an existing title, your project will automatically be updated with the latest rendered media file.

### Saving your project

When you save your work, it is saved in a project file (\*.dar). Project files are not rendered media files.

1. From the File menu, choose Save.

**Note:** The first time you save a project, the Save As dialog appears. In subsequent saves, the dialog is bypassed, your existing file name is retained, and your project is updated to include any implemented changes.

- 2. Select the drive and folder where you want to store the project.
- 3. Type the project name in the File Name box.
- 4. Click the Save button.

# Saving a copy of your project (Save As)

After you have been working with your project, you can use the **Save As** command on the **File** menu to create a copy of the project file with a different name. Saving a number of different versions of a project is a low-risk way to try new techniques.

- 1. From the File menu, choose Save As. The Save As dialog is displayed.
- 2. Select the drive and folder where you want to store the project.
- 3. Type a new name in the File name box.
- **4.** Choose a setting from the **Copy media** drop-down list if you want to copy your project's assets to the same folder as your project file:
  - Normal saves a standard DVD Architect project without copying media.
  - Copy user media with project creates copies of your media files in the project folder.
  - Copy user and theme media with project creates copies of your media files and any required theme files in the project folder.
- 5. Click the Save button.

# **Chapter 4** Creating a Menu-Based DVD

When you start a menu-based project with DVD Architect™, a main menu is created by default. You can add more menus to allow the user to play movies and navigate to other menus by selecting buttons.

Think of menus as an outline of your DVD project: each menu can contain background media, graphics, text, and links to music/video compilations, picture compilations, or movies.

You can apply a theme to your menus to achieve a consistent appearance and layout, or you can customize the appearance of each menu and its objects individually. For more information, see Working with themes on page 123.

Pages extend menus across multiple screens; add a page when you want to add more items to a menu than will fit on a single page.

**Tip:** If you use a background video in your menu, we recommend rendering the video in progressive-scan format before adding it to your project. On the Video tab of the Optimize DVD dialog, click the Progressive box and choose Auto to render the noncompliant menu as progressive-scan video. Progressive-scan menus will provide the sharpest-looking text and highest level of DVD player compatibility. For more information, see Optimizing your project on page 34.

If you need to use interlaced video as a menu background, click the **Progressive** box and choose No. When you choose No, the noncompliant menu will be rendered as interlaced video.

Some DVD players will not display the last frame of a menu correctly when using interlaced background video.

# **Building menus**

When a user places the DVD in a DVD player or drive, a main menu is displayed. The main menu contains links to submenus or titles (music compilations, picture compilations, or media files) when the user selects them. When you start the software and create a menu-based project, a default main menu page is displayed for you. You can begin assembling your main menu using the existing appearance and layout, or you can edit the appearance of the main menu using themes or by adding your own background image/video, text, and audio. You can begin adding submenus and media whenever you're ready!

### Adding a submenu

You can add submenus to a DVD project to organize your content.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to
- From the Insert menu, choose Submenu. A new menu is created below the current menu, and a button is added to the current menu as a link to the submenu.



Click the Insert Object 🕂 button and choose Menu 🛅 in the Project Overview window.

**Note:** You can edit the button by selecting it and making changes to the controls in the Button Properties pane in the Properties window. For more information, see Button properties on page 67.

3. Double-click the submenu in the Project Overview window (or double-click the submenu's button in the workspace) to edit the layout and add titles (such as movies, music, or compilations) or playlists.

### Adding a submenu from a file

You can add submenus from a file to create a new menu using a .psd file that contains menu background, buttons, and related mask images in a single layered file. For more information, see Creating custom menus and buttons using layered graphics on page 120.

Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.

- 2. From the Insert menu, choose Submenu from File and browse to the file. A new menu is created below the current menu, and a button is added to the current menu as a link to the submenu.
- **3.** Double-click the submenu in the Project Overview window (or double-click the submenu's button in the workspace) to open the new menu in the workspace.
- 4. Add links for each button.
  - a. On the Button Properties pane, click the Action button.
  - **b.** Click **Command**, click the button, and choose **Link**.
  - c. Click **Destination**, click the button, and choose the button's destination from the menu.

**Tip:** If you're linking to a title, the title must be in your project before you can choose it as a destination. Drag the media file from the Explorer window to the Project Overview window to add it to your project.

5. Edit the menu as needed.

### Reapplying a file's layout to menu objects

You can automatically update menu objects at any time after importing a menu from a layered image file. The update will restore the initial look of the menu, which includes button sizes and locations. Any buttons that you added after importing the layered file will be removed and any buttons that you deleted after importing the layered file will be restored.

**Note:** Nonvisual changes, such as button links, are preserved.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to reapply the layout.
- 2. From the Edit menu, choose Reapply Layout From File to update the objects.

### **Inserting pages**

### **Adding pages**

You can add pages to a menu if you have more content than will fit on one page. For example, your main menu could be two pages long if necessary.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. From the Insert menu, choose Page. An arrow button is added to the current menu as a link to the page.

**Note:** You can edit the button by selecting it and making changes to the controls in the Button Properties pane in the Properties window. For more information, see <u>Button properties</u> on page 67.

**3.** Double-click the page in the Project Overview window (or double-click the arrow button in the workspace) to edit the layout and add media.

### **Deleting pages**

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. From the Edit menu, choose Delete Page.

### Changing page order

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. From the Edit menu, choose Page Order, and then choose Move Forward or Move Back to move the current menu forward or backward.


### Editing menu page properties

The Menu Page Properties pane in the Properties window allows you to adjust the length, background media, end actions, and remote control button behavior for the selected page.

To edit the menu's properties, perform the following steps:

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. Click the property button that you would like to edit.
- 3. Click the specific property, click the 
   button, and choose a setting from the

The following sections describe the controls under each heading in the Menu Page Properties pane.



#### General

#### Reduce interlace flicker

Choose a setting from the drop-down list to turn flicker reduction on or off. Turn flicker reduction on when using still images that contain horizontal lines.

### Start script

If you have already created at least one DVD script in your project, select the **Start Script** box, click the will be played when the music/video compilation is accessed.

Note: None is the default setting.

### Menu length

A menu's length determines how much time is available for animated menu objects. For example, if your menu length is 30 seconds, an animated button could display up to 30 seconds of video.

Choose a setting from the Menu length drop-down list:

- When Auto calculate is selected, the software will determine the menu length based on the background audio, video, and button animations.
- When Specify is selected, you can type a number in the Length box or click the button to display a slider you can
  use to match the length of the background video if one exists.

**Note:** If you type a value in the **Length** box that is longer than the background video, the background video will end, and any animated thumbnails will continue to play until the end of the menu. If you want the menu to loop smoothly when your menu duration is longer than the video, create a new background video that matches the desired menu length.

#### Loop point

Choose a setting from the drop-down list or drag the slider to set the point at which buttons will be displayed and when looped playback will begin. You may also apply keyframe animation to buttons before the loop point. The loop point is shown with a green marker in the Timeline window. For more information, see Crop and video effects keyframes on page 58.

**Note:** If the menu's end action is not set to **Loop**, the menu loop point will set the point at which buttons are displayed, but the menu will not loop.

#### Selected button colors

Choose a color set that will be used to display the selected button on a page. Choose **None** if you do not want to use color sets to display button highlighting.

#### **Activated button colors**

Choose a color set that will be used to display the selected button when you press **Enter** on the remote control to activate it. Choose **None** if you do not want to use color sets to display button highlighting.

#### **Inactive button colors**

Choose a color set that will used to display unselected buttons on the menu. Choose **None** if you do not want to use color sets to display button highlighting

### **Background Media**

**Tip:** If you use a background video in your menu, we recommend rendering the video in progressive-scan format before adding it to your project. Leave the **Enable progressive render of DVD menus** check box on the General tab of the Preferences dialog selected, and all noncompliant menus will be rendered as progressive-scan video. Progressive-scan menus will provide the sharpest-looking text and highest level of DVD player compatibility.

If you need to use interlaced video as a menu background, clear the **Enable progressive render of DVD menus** check box on the General tab of the Preferences dialog. When the check box is cleared, all noncompliant menus will be rendered as interlaced video.

#### Video

The Video control displays the path to the background video file that will be used in the menu.

Select the control and click the button to display a menu, where you can choose a file, view media properties, crop and adjust media settings, remove the current file, open the file in your selected graphics editor, or explore the file's containing folder on your drive.

### Tips:

- To change a file quickly, drag a file from the Explorer window to the **Video** box.
- If you use a background video in your menu, we recommend rendering the video in progressive-scan format before adding it to your project. On the Video tab of the Optimize DVD dialog, click the **Progressive** box and choose **Auto** to render the noncompliant menu as progressive-scan video. Progressive-scan menus will provide the sharpest-looking text and highest level of DVD player compatibility. For more information, see Optimizing your project on page 34.

If you need to use interlaced video as a menu background, click the **Progressive** box and choose **No**. When you choose **No**, the noncompliant menu will be rendered as interlaced video.

If you're using a .psd file as a menu background, click the  $| \pm |$  button to the left of the **Video** heading and choose a setting from the Layer menu to choose the layer you want to use.

**Note:** Some DVD players will not display the last frame of a menu correctly when using interlaced background video.

#### Audio

The Audio control displays the path to the background audio file that will be used in the menu.

Select a command from the menu, where you can choose a file, view media properties, remove the current file, or generate music if Cinescore is installed on your computer. For more information, see Generating music with Cinescore on page 116.

#### Highlight mask

You can apply a mask to your menu to prevent button highlighting from obscuring parts of the menu. Select a command from the menu, where you can choose a file, view media properties, crop and adjust media settings, or remove the current file.

For additional mask controls, click the 🛨 button to the left of the Mask heading.

ltem	Description
Layer	If the current mask file uses layers, then this control allows you to choose a single layer or the combined layers as a highlight mask.
	<b>Note:</b> If you want to use the combined layers as a mask, choose <b>Composited layer</b> .

The menu highlight mask and button highlight mask are combined, and the Selected button colors, Activated button colors, or Inactive button colors color set is applied to the masked area for each button depending on its current state. For more information, see Creating custom masks on page 117.

### Highlight mask mapping

To specify how transparency is determined from the mask, choose a command from the drop-down list.

ltem	Description
Transparency	Maps the alpha channel in the menu highlight mask to the four colors used in the color set selected in the Selected button colors, Activated button colors, or Inactive button colors drop-down list.
	The most opaque pixels (those with alpha values of 192 to 255) are mapped to the color set's fill color (color 1), and the most transparent pixels (those with alpha values of 0 to 63) are mapped to the color set's transparent color (color 4).
Intensity	Maps the average pixel intensity of the menu highlight mask to the four colors used in the color set selected in the <b>Selected button colors</b> or <b>Activated button colors</b> drop-down list.
	The lightest pixels (those with an average intensity of 192 to 255) are mapped to the color set's fill color (color 1), and the darkest pixels (those with an average intensity of 0 to 63) are mapped to the color set's transparent color (color 4).
Color channel	Maps the color channels in the menu highlight mask to the four colors used in the color set selected in the <b>Selected button colors</b> or <b>Activated button colors</b> drop-down list.
	A pixel containing any red channel component uses the color set's fill color (color 1), a pixel containing any green channel component uses the color set's anti-alias color (color 2), a pixel containing any blue component uses the color set's outline/background color (color 3), and a completely black pixel uses the color set's transparent color (color 4). For more information, see Using color sets on page 54.

### Stretch type

Choose an option from the drop-down list to determine how the image will be scaled.

Item	Description
Letterbox	The image is displayed without scaling, and black letterboxing bars are displayed above and below or to the right and left sides as needed.
Zoom to fit	The image is magnified to fill the screen.
Stretch to fit	The image is stretched to fill the screen. This may cause distortion in the image.

#### **End Actions**

#### Command

A menu's end action determines what happens at the end of the menu if a user doesn't select a button.

Choose a command from the drop-down list to determine what happens at the end of the menu.

Item	Description
Loop	The menu will play continuously, repeating playback from the loop point until the user activates another button. Menu buttons are not displayed until playback reaches the loop point.
	If you want the menu to loop smoothly, ensure the background video length matches the menu length.
Hold	The menu will play once and then display a static menu until the user activates another button.
Activate Button	A button will be activated after a specified duration if the user doesn't activate another button. You can use this setting to automatically stop or resume playback or display another page if the user doesn't choose another action within a set time.

#### **Timeout**

When **Activate button** is selected in the **Command** drop-down list, use the **Timeout** control to set the amount of time you want to pass before performing the end action.

**Note:** If the Timeout setting is longer than the menu length, the last frame is held until the timeout duration.

#### **Button**

When **Activate button** is selected in the **Command** drop-down list, use the **Button** control to indicate which button will be activated if the user hasn't activated another button before the **Timeout** duration has passed.

### **Remote Buttons**

For each menu and title, you can allow or suspend operation of individual buttons on the DVD player's remote control. Turning buttons on or off helps to ensure the viewer will see your DVD as you intended it.

If you have an animated menu, for example, turning off buttons will prevent the user from navigating away from the menu before it's finished playing.

To turn each button on or off, choose On or Off from the drop-down list.

**Note:** When **Off** is selected from the menu, the button is not available.

Item	Description
Title play	Allows the user to press the Title button on the remote to skip to a specific video or music/picture compilation.
Stop	Allows the user to press the Stop button on the remote to stop the DVD.

Time/chapter search Allows the user to press the Time button on the remote to skip to a specific play time or chapter. Previous/up Allows the user to press the Previous/Up button on the remote to navigate to the previous chapter or menu page.  Next Allows the user to press the Next button on the remote to navigate to the next chapter or menu page.  Fast scan Allows the user to press the Fwd button on the remote to seek forward through a video, music compilation, or picture compilation.  Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to switch widescreen, letterboxed, and pan-and-scan presentation in a 16:9 video.	Item	Description
Chapter or menu page.  Next Allows the user to press the Next button on the remote to navigate to the next chapter or menu page.  Fast scan Allows the user to press the Fwd button on the remote to seek forward through a video, music compilation, or picture compilation.  Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Audio button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to switch wideo track is played.  Allows the user to press the Angle button on the remote to switch wideo track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch wideocreen, letterboxed,	Time/chapter search	Allows the user to press the Time button on the remote to skip to a specific play time or chapter.
Allows the user to press the Next button on the remote to navigate to the next chapter or menu page.  Fast scan Allows the user to press the Fwd button on the remote to seek forward through a video, music compilation, or picture compilation.  Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to switch widescreen, letterboxed,  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Previous/up	Allows the user to press the Previous/Up button on the remote to navigate to the previous
Fast scan Allows the user to press the Fwd button on the remote to seek forward through a video, music compilation, or picture compilation.  Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to switch wideocreen, letterboxed,		chapter or menu page.
Fast scan Allows the user to press the Fwd button on the remote to seek forward through a video, music compilation, or picture compilation.  Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to switch video track is played.  Allows the user to press the Angle button on the remote to switch video track is played.  Allows the user to press the Angle button on the remote to switch video track is played.  Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Next	Allows the user to press the Next button on the remote to navigate to the next chapter or menu
compilation, or picture compilation.  Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to switch widescreen, letterboxed, Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,		page.
Backward scan Allows the user to press the Rev button on the remote to seek backward through a video, music compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Fast scan	·
compilation, or picture compilation.  Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,		· · · · · · · · · · · · · · · · · · ·
Top menu Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.  Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Backward scan	·
Menu This control is not available for menu pages.  Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	-	
Resume Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to switch widescreen, letterboxed, Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Top menu	Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.
after exiting it by pressing the Menu button.  Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Menu	This control is not available for menu pages.
Button navigation Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Angle button on the remote to switch widescreen, letterboxed,  Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Resume	
menu buttons.  Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,		after exiting it by pressing the Menu button.
Pause Allows the user to press the Pause button on the remote to temporarily suspend playback.  Audio track change Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Button navigation	
Allows the user to press the Audio button on the remote to choose which audio track is played.  Note: Choose No Change to use the last-set track.  Subtitle track change Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,		
Note: Choose No Change to use the last-set track.  Subtitle track Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Pause	
Subtitle track  Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.  Note: Choose No Change to use the last-set track.  Video angle change  Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode  Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Audio track change	Allows the user to press the Audio button on the remote to choose which audio track is played.
change displayed.  Note: Choose No Change to use the last-set track.  Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,		<b>Note</b> : Choose <b>No Change</b> to use the last-set track.
Note: Choose No Change to use the last-set track.  Video angle change Video mode  Allows the user to press the Angle button on the remote to choose which video track is played.  Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	Subtitle track	Allows the user to press the Subtitle button on the remote to choose which subtitle track is
Video angle change Allows the user to press the Angle button on the remote to choose which video track is played.  Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,	change	displayed.
Video mode Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,		<b>Note</b> : Choose <b>No Change</b> to use the last-set track.
•	Video angle change	Allows the user to press the Angle button on the remote to choose which video track is played.
and pan-and-scan presentation in a 16:9 video.	Video mode	Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,
		and pan-and-scan presentation in a 16:9 video.

### Fixing button navigation

If your DVD player's Next button goes to the next title instead of the next chapter or if your DVD player's Previous button doesn't navigate to the previous title in a playlist, then you will need to turn off Title play.

- 1. In the Project Overview window, double-click the title that you want to edit.
- 2. In the Properties window, click the Remote Buttons button.
- 3. Select Title play and choose Off from the drop-down menu.

**Tip:** You can use the Order DVD Titles dialog to make the title order match the playlist order. For more information, see Editing title order on page 46.

### **Color Sets**

### Choosing color sets for a menu's buttons

You can choose color sets to choose which colors are used to indicate selected, activated, and inactive buttons. You can have four project-wide color sets that are available to every menu page in your project, and each menu page in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/ background color, anti-alias color, and transparent color.

Use the Color Sets page to edit the color sets that will be available for the selected menu, and then use the General page to choose which color sets are used for the selected, activated, and inactive buttons on your menu. For more information, see Using color sets on page 54.

# **Adding titles**

The buttons and graphics displayed on a menu are called *objects*. Some of these objects, such as graphics and static text, are used for design purposes, and others, such as buttons, are used for navigation purposes. Each full-screen menu can hold up to 36 button; widescreen menus can hold up to 18 buttons.

Media such as videos, music/video compilations, and picture compilations are called *titles*. When you add a title to your project, an object is automatically created on your menu.

Use the Button Properties controls to edit button settings. For more information, see Button properties on page 67.

### Inserting a picture compilation

To add a picture compilation to your menu or page, choose **Picture Compilation** from the **Insert** menu. For more information on picture compilations, see Creating a Picture Compilation on page 83.



Click the Insert Object 

→ button and choose Picture Compilation 

in the Project Overview window.

#### Inserting a music/video compilation

To add a music/video compilation to your menu or page, choose **Music/Video Compilation** from the **Insert** menu. For more information on music compilations, see Creating a Music/Video Compilation on page 75.



Click the **Insert Object** 

→ button and choose **Music/Video Compilation** 

in the Project Overview window.

**Tip:** Buttons can be added to picture, music, or video compilations. For more information, see Adding buttons to videos on page 102.

### Inserting a single-movie title

To add a single-movie title to your menu or page, choose **Media** from the **Insert** menu. For more information on adding movies, see Creating a Single-Movie DVD or Title on page 97.



Click the **Insert Object** 

→ button and choose **Media** 

in the Project Overview window.

**Note:** Once you have inserted a single-movie title and added chapter markers, you can automatically create a scene selection menu based on your markers. For more information, see <u>Inserting a scene selection menu</u> on page 50.

### Editing title order

From the File menu, choose **Order DVD Titles** to display the Order DVD Titles dialog, where you can change the order in which titles are arranged on the disc.

Reordering titles can be useful when fine-tuning the layer break on dual-layer discs or to ensure that the titles in a playlist will play back sequentially when a user interrupts playback by pressing the Next button on the remote control. For more information, see Adding a playlist to a menu on page 93.

1. From the File menu, choose Order DVD Titles. The Order DVD Titles dialog is displayed.

By default, the title order matches the order in which you added titles to the project.

- 2. Select a title and click the Move Up or Move Down buttons to change the selected title's order.
- 3. Repeat step 2 as needed.
- **4.** Click **OK** to close the Order DVD Titles dialog and save your changes.

# **Adding graphics**

You can add an image or video to serve as a design element for a menu or page. If you add a video to a menu, it will automatically begin playback when the user accesses the menu.

**Note:** Graphics are for design purposes only and cannot be used for navigation.


- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. From the Insert menu, choose Graphic. The Insert Graphic dialog is displayed.
- **3.** Locate and select the file you want to use.
- **4.** Click the **OK** button. The image or video is added to your menu.

# **Editing graphics properties**

The Graphics Properties pane in the Properties window allows you to adjust the position, size, and appearance of graphical elements on a menu or compilation.

To edit the graphic's properties, perform the following actions:

- Select a graphic with the selection tool 🗽, sizing tool 🎹 or navigation tool
- 2. Click the property button that you would like to edit.
- Select the specific property, click the <u>w</u> or <u>solution</u> button, and choose a setting.



#### **Transformations**

Item	Description			
X position	Allows you to edit the X and Y position values to change the center of the selected graphic's position.			
Y position	Perform any of the following to change the setting:			
	Select the number and type a new value.			
	Use the spin controls to adjust the value.			
	• Select the value and click the 🔻 button to display a slider that you can use to adjust the value.			
	<b>Note</b> : These coordinates are based on the frame size of your project. For example, if you're creating an NTSC project with a frame size of 720x480, (0,0) is the top-left corner of the frame, and (720,480) is the lower-right corner.			
X size	Allows you to edit the X and Y size values to change the size of the selected graphic.			
Y size	Perform any of the following to change the setting:			
	Select the number and type a new value.			
	Use the spin controls to adjust the value.			
	• Select the value and click the value button to display a slider that you can use to adjust the value.			
Maintain aspect ratio	Allows you to choose if you want the image to be stretched when you change the height or width.			

#### Media

Media settings determine the image displayed for a graphical element and adjusts its appearance. You can use still images or video files as graphics.

### **Object Media**

Object Media displays the path to the current media file. Select the button for options to replace a file, view media properties, crop and adjust media settings, remove the current file, open the file in a graphics editor, or explore the containing folder.

**Tip:** To change a file quickly, drag a file from the Explorer window to the **Object Media** box.

For more information, see Cropping and adjusting video and graphics on page 55. For more information, see Editing media properties on page 61.

#### Start time

Allows you to adjust which frame is displayed (for a still image) or the frame at which playback will begin (for an animated graphic) by dragging the slider or typing a value in the box.

#### Style

Allows you to choose if you want to display a still image or an animated graphic.

### **Highlight mapping**

Select Highlight mapping to specify how a transparency is determined from the mask.

For more information, see Highlight mask mapping on page 43.

#### **Color Sets**

Color sets determine which colors are used to indicate selected, activated, and inactive buttons on your menu page. You can have four project-wide color sets that are available to every menu page in your project, and each menu page in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/background color, anti-alias color, and transparent color.

Use the Color Sets page to edit the color sets that will be available for the selected menu, and then use the General page in the Menu Page Properties pane to choose which color sets are used for the selected, activated, and inactive buttons on your menu. For more information, see Using color sets on page 54.

# Inserting and editing text

#### Inserting text on a menu or page

- 1. From the Insert menu, choose Text. A text box is placed on the current menu or page.
- 2. Type your desired text.
- **3.** Drag the text box to position it on the menu or page.

#### Setting a menu's title text object

A title object is used when you apply themes to a menu. The title object will also be used as the menu's title in the Project Overview window if the menu has not been renamed. After renaming a menu in the Project Overview window, changing the title object will set the object that will be used for themes, but it will not rename the menu.

Right-click a text object and choose **Title Object** from the shortcut menu to use the selected text as the menu's title object.

### Formatting text

1. Select a text box with the selection tool 🦠, sizing tool 🛱 or navigation tool 🚵. The text bar below the menu displays the text settings.

### **Tip:** From the **View** menu, choose **Text Bar** to display or hide the text bar.

- 2. Choose a font from the drop-down list to set the typeface for your text.
- 3. Choose a font size from the drop-down list. Choose Auto to have the text automatically adjust to fit the size of the text box.
- **4.** Click the **Bold B**, **Italic 1**, or **Shadow s** buttons to toggle your font effects as desired.
- 5. To apply a shadow, click the down arrow next to the Shadow S v button. A pop-up window is displayed to allow you to set the position, color, and blurring of the shadow text.
- 6. Set your text justification options as desired. For more information, see Text toolbar (Alt+2) on page 16.
- 7. Click the down arrow next to the color swatch button 🔲 to display the color picker, where you can set the red, green, blue, and alpha channels for your text.

### **Editing text**

- 1. Select a text box in the current menu.
- 2. From the Edit menu, choose Edit Text (or press F2). The text becomes editable.
- **3.** Edit the text as necessary.
- 4. Press one of the following keys to commit your text changes:
  - F2
  - Ctrl+Enter
  - Tab

#### Moving text

- 1. Select a text box with the sizing tool \(\overline{\pi}\).
- 2. Move the selected text using one of the following options:

Option	Description
Ī	Drag the text box.
II	1. Click the Transformations button in the Properties window.
	2. Drag an object in the workspace or type values in the X position and Y position boxes to set the object's center point.
	<b>Note</b> : The X and Y coordinates are based on the frame size of your project. For example, if you're creating an NTSC project with a frame size of 720x480, (0,0) is the top-left corner of the frame, and (720,480) is the lower-right corner.

### **Setting loop points**

When a menu's action is set to loop, you can specify a loop point to indicate the point where looped playback will begin.

**Notes:** Menu buttons will not appear until playback reaches loop point if Show Before Loop Point is set to **No** in the Buttons Properties window. For more information, see Button properties on page 67.

If Show Before Loop Point is selected **Yes** in the Button Properties window, buttons will display before the loop point. Keyframe animation may be applied to the buttons. For more information, see Crop and video effects keyframes on page 58.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. Set the menu's end action.
  - a. On the Menu Page Properties window, click the End Action button.
  - **b.** Click **Command**, click the **v** button, and select **Loop**.

**Note:** If the menu's end action is not set to Loop, the menu loop point will set the point at which buttons are displayed, but the menu will not loop.

- 3. Set your menu's length.
  - a. On the Menu Page Properties pane, click the General button.
  - **b.** Click **Menu length**, click the **v** button, and select one of the following options:

Item	Description
Auto calculate	The software will determine the menu length based on the background audio, video, and button animations.
Specify	When selected, it allows you to type a number in the Length box or click the w button to display a slider to set the length of the background video if one exists.
	<b>Tip</b> : If you type a value in the <b>Length</b> box that is longer than the background video, the background video will end, and any animated thumbnails will continue to play until the end of the menu. If you want the menu to loop smoothly when your menu duration is longer than the video, create a new background video that matches the desired menu length.

**4.** Click **Loop point**, click the button, and drag the slider or type a value in the box to set the point at which buttons will be displayed and when looped playback will begin. The loop point is shown with a green marker in the Timeline window.



Click the Set Loop Point button @ in the Timeline window.

### Inserting a scene selection menu

You can quickly and easily create a scene selection menu from an existing video title.

### Continuing playback after playing the selected scene

- 1. Insert your video title and add your scene/chapter markers. These markers are used to create your scene selection menu. For more information about inserting video titles, see Adding a movie title to a menu on page 97. For more information about adding scene/chapter markers, see Inserting scene/chapter markers on page 98.
- 2. Return to the menu to which you added the video title and select its button in the workspace or select the title in the Project Overview window.
- 3. Right-click the video title and click the Insert Scene Selection Menu button in the Project Overview window. The Insert Scene Selection Menu dialog is displayed.
- 4. In the Page title box, type a title to use for the scene selection menu.

- 5. In the Links per page box, type the number of links you want to display per page. If you have many scenes and you don't want them all to appear on one page, as many scene selection pages as necessary will be created to accommodate all of your scenes/chapters.
- 6. Click OK. Your scene selection menu and pages are automatically created using the current theme, and a button is added to the current menu.
- 7. To edit a scene selection menu, double-click the button. You can edit the layout or object properties on the menu.

Tip: If you want to create individual thumbnails that link to chapter points without creating a scene-selection menu, add an empty button to your menu and use its button action to link to a title and chapter.

### Returning to the menu after playing the selected scene/chapter

- 1. Insert your video title and add your chapter markers or scene/chapter markers. These markers are used to create your scene selection menu. For more information about inserting video titles, see Adding a movie title to a menu on page 97. For more information about adding chapter markers, see Inserting chapter markers on page 98.
- 2. Return to the menu to which you added the video title and select its button in the workspace or select the title in the Project Overview window.
- 3. From the Edit menu, choose Copy. The button is copied to the clipboard.
- **4.** From the **Edit** menu, choose **Paste**. A copy of the button is added to your menu.
- 5. Repeat step 4 for each chapter you want to be able to play from the menu.
- 6. Set the in and out points for each button.
  - a. Double-click the button in the workspace or double-click the title in the Project Overview window to open it.
  - b. In the Timeline window, position the cursor where you want the button to begin playback and click the Set In Point button .
  - c. Position the cursor where you want the button to stop playback and click the Set Out Point button a.
- 7. Repeat step 6 for each button.

### Creating a scene selection only DVD

This procedure assumes your title includes scene/chapter markers. You can add scene/chapter markers in the Timeline window.

- 1. From the File menu, choose New.
- 2. Select the Single Movie icon 👊, and then click OK. The Open Media dialog is displayed.
- 3. Select the video file you want to use, and then click OK.
- 4. In the Project Overview window, right-click the video and choose Insert Scene Selection Menu from the shortcut menu. The Insert Scene Selection Menu dialog is displayed.
- 5. In the Page title box, type the title you'd like to be displayed on the new menu.
- In the Links per page box, specify the number of links you'd like to have displayed on each page. For example, if your video includes fifteen scene/chapter markers, typing 5 in this box will create a scene-selection menu with three pages.
- 7. Click the OK button to create the menu and pages. You can then edit the menu as necessary.
- 8. In the Project Overview window, select the menu page (i.e. Scene Selection (Page 1)) and click the Set DVD Start button **1**.

### Inserting a setup menu

You can use button actions to create a setup menu that allows the user to choose which audio and subtitle tracks will be used when your DVD is played. For more information, see Button properties on page 67.

**Note:** If a button action or end action changes the audio or subtitle track after it is selected on your setup menu, the new track will be used by default when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.

- 1. Add a menu to your project.
- 2. Add a button for each audio track in your project:
  - a. From the Insert menu, choose Empty Button.
  - **b.** Press F2 and edit the button's text to describe the audio track it will select.
  - **c.** In the Button Properties pane, click the **Action** button and use the **Destination chapter** drop-down list to determine what happens when the button is clicked:

If	Then
You want the button to select an audio track without navigating away from the setup menu	Choose your setup menu from the <b>Destination</b> drop-down list.
You want to navigate away from the setup menu after choosing an audio track	Choose a media file or menu from the <b>Destination chapter</b> drop-down list.

For example, choosing a media file would allow you to automatically start playback of a title using the selected audio. Choosing a menu could navigate to a scene selection menu or a separate setup menu for choosing the subtitle track.

d. In the Button Properties controls, choose a track from the Set audio track drop-down list to determine which audio track will be played in a destination title.

**Note:** If you use the **Set audio track** control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.

- e. Repeat steps a through d for each audio track in your project.
- 3. Add a button for each subtitle track in your project:
  - **a.** From the **Insert** menu, choose **Empty Button**.
  - **b.** Press F2 and edit the button's text to describe the subtitle track it will select.
  - c. In the Button Properties controls, use the **Destination chapter** drop-down list to determine what happens when the button is clicked:

If	Then
You want the button to select a subtitle track without navigating away from the setup menu	Choose your setup menu from the <b>Destination chapter</b> drop-down list.
You want to navigate away from the setup	Choose a media file or menu from the <b>Destination</b>
menu after choosing a subtitle track	<b>chapter</b> drop-down list.

For example, choosing a media file would allow you to automatically start playback of a title using the selected subtitles. Choosing a menu could navigate to a scene selection menu or a separate setup menu for choosing the audio track.

**d.** In the Button Properties controls, choose a track from the **Set subtitle track** drop-down list to determine which subtitle track will be played in a destination title.

**Note:** If you use the **Set subtitle track** control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.

e. Repeat steps a through d for each subtitle track in your project.

4. If you want the current tracks to be used throughout the DVD, change the button properties for all links to your media so No change is selected for the Set audio track and Set subtitle track controls.

### Adding navigation buttons

Navigation buttons help users move through your DVD menus and pages. As you create menus and pages, navigation buttons are automatically created for you. For example, if the main menu is selected when you add a submenu, a button link to the new menu is added to the main menu, and a button link to the main menu is added to the new menu.

If you delete the default navigation buttons, you can create new buttons by choosing a command from the Insert menu:

Button	Command	Description
<b>O</b>	Back Button	Allows navigation to the main menu.
<del>Ф</del> •	Next Button	Allows navigation to the next page.
<b>O</b>	Previous Button	Allows navigation to the previous page.
¢	Empty Button	Allows you to add an empty button as a placeholder. You can edit the button's properties later.

**Note:** The Back Button, Next Button, and Previous Button commands are available only if the target menu or page exists.

You can use the Button Properties controls in the Properties window to edit the button image used and its link properties. For more information, see Button properties on page 67.

# Creating menu transitions

You can combine button actions and media end actions to play a media file as a transition between menus and between menus or titles.

- 1. Drag the transition media file from the Explorer (or Microsoft® Windows® Explorer) to the root folder in the Project Overview window. Dragging a file to the root folder adds the media to your project without creating a button on a menu.
- 2. Set the transition media's end action to link to the menu or title that you want to display after the transition.
- 3. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to
- 4. Select a button.
- **5.** Set the button action to play the transition media.
  - When a user activates the button, the button plays the transition media, and the transition media's end action displays the target menu or title.
- Repeat steps 1 through 5 for each button on the menu.
  - You can create multiple copies of your transition media at the root of the Project Overview window and specify a different menu as an end action for each instance. The transition media will only be saved to the DVD once.

**Note:** Multiple titles or media files that use the same video, audio, and subtitle streams will only be saved once on the disc. For more information, see Optimizing your project on page 34.

### Creating custom menus

For the ultimate control over the appearance of your menus, you can create custom menus using your favorite graphics application. For more information, see Creating custom menus and buttons using layered graphics on page 120.

### Using color sets

Each menu page or title in your DVD Architect project can have up to four color sets with four colors each. Each color set includes a fill color, outline/background color, anti-alias color, and transparent color. By choosing different color sets, you can display button highlighting using one color set to indicate that the button is selected and a different color set to indicate that it has been activated, or you can assign distinct colors to subtitle events. For more information, see Style on page 70, Creating a graphic subtitle on page 111, or Editing a subtitle event's color set on page 114.

If the window isn't already visible, choose **Properties** from the **View** menu and click the **\( \Delta\)** button next to the **Color Sets** heading to expand the controls.

### Editing a color set

- 1. On the Graphics Properties, Menu Page Properties, Button Properties, Subtitle Properties, Media and Event Properties, Music Compilation Properties, Picture Compilation Properties, or Playlist Properties pane, click the Color Sets button.
- 2. Click the + button next to the color set you want to edit.
- 3. Choose a setting from the Color Set X drop-down list to indicate whether you want the color set to be available to your entire project (Project wide) or only the currently selected menu or title (Custom).
- 4. Select the Mode box, click the button, and choose a setting from the drop-down list to specify the colors in your color set:

Item	Description
Blend colors	You only need to choose the color set's fill color; the other colors will be determined automatically by the software.
Specify colors	You need to choose the fill color, anti-alias color, outline/background color, and transparent color.

5. Select the color you want to edit:

ltem	Description	
Fill color	Use to display subtitle text and highlighting on menu buttons.	
Anti-alias color	Used to smooth the edges of menu button highlighting and subtitle text. The color should be	
	a blend of the fill color and the outline/background color.	
Outline/	Used to display the outline or background color for menu buttons or subtitle text.	
Background color		
Transparency	Used to determine the transparent portions of subtitle text and menu button highlighting.	
color		

**6.** Click the drop-down arrow next to the selected color swatch to display a color picker, where you can edit the selected color. Click the **1** button to switch between RGB and HSL color modes.

**Note:** If you choose an out-of-gamut color while using the color picker, then a warning  $\triangle$  is displayed. Click the color swatch below the warning to correct the color.

### **Applying color sets**

You can apply color sets to buttons using the **Selected button colors**, **Active button colors** and **Inactive button colors** drop-down lists in the Menu Page Properties pane. For more information, see Choosing color sets for a menu's buttons on page 45.

To apply color sets to subtitles, select the events you want to change, click the **Subtitle Event** button in the Media and Subtitle pane and choose a color set from the **Colors** drop-down list.

### Changing an object's size

### Resizing an object

- 1. Select a button, graphic, or text box with the sizing tool \(\overline{\pi}\).
- 2. Click the Transformations button on the Properties window, and drag the object's handles or type values in the X size and Y size boxes to achieve the desired size.
- 3. If you do not want an image to be stretched when you change the height or width, select the Maintain aspect ratio box, click the w button, and choose Yes.

**Tip:** If you are resizing a text box and you want the text to automatically adjust to fit the box, choose **Auto** from the **Font** Size drop-down list.

### Making all selected objects the same height or width

- 1. Select the objects you want to adjust. Hold Ctrl or Shift to select multiple objects.
- 2. While holding the Ctrl or Shift key, select the object whose size you want to copy.
- 3. Click the Make Same Width 📾 or Make Same Height 🗓 button. All selected objects are adjusted so they match the object that has focus (the last object you selected).


Note: If you resize an object in one direction only, the object will not resize if Maintain aspect ratio is set to Yes on the **Transformations** page of the Properties window because the image cannot be resized in one direction and still maintain its aspect ratio. You can turn off the Maintain aspect ratio setting or resize the object in both directions.

# Cropping and adjusting video and graphics

Use the Crop and Adjust window to crop a video or graphic or adjust its appearance. You can set these changes to occur over time through the use of keyframes. The window includes a preview pane so that you can monitor your progress and compare the processed and unprocessed image.

### Displaying the Crop and Adjust window

From the View menu, choose Crop and Adjust to display or hide the Crop and Adjust window. You can also right-click a graphic in the workspace and choose Crop and Adjust from the shortcut menu (or select the Video box in the Properties window, click the vibutton, and then choose Crop and Adjust from the menu).

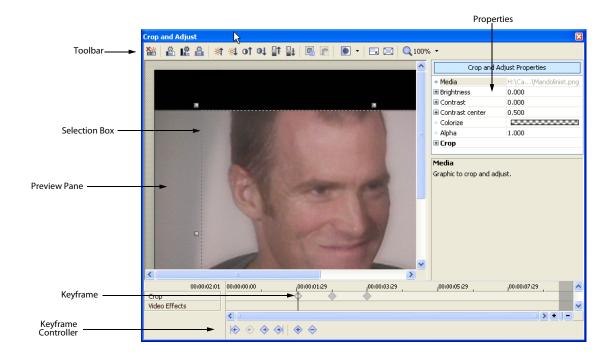

### Using the toolbar

Use the toolbar to make quick adjustments to a video or image. You can use the display in the Crop and Adjust window to preview your adjustments.

**Note:** Expand the **Brightness**, **Contrast**, and **Contrast center** controls on the right side of the dialog to see the results of your adjustments.

X.	Reset Effect Properties: Removes all effects from the media	<b>₽</b> †	Increase Contrast Center: Adjusts the anchor point around which green contrast is adjusted.
Hill	Auto Levels: Automatically adjusts the brightness and contrast based on the contents of the selection box. The most abundant colors (either light or dark) are enhanced).	#	Decrease Contrast Center: Adjusts the anchor point around which green contrast is adjusted.
Iŝ.	Auto Levels (Dark): Automatically adjusts the brightness and contrast based on the contents of the selection box. The least abundant colors (either light or dark) are enhanced.		Copy Crop Rectangle to Clipboard: Copies the current selection to the clipboard.
å	Automatically adjust brightness/ contrast per channel: Automatically adjusts brightness and contrast per channel based on the contents of the selection box. Adjustment is performed independently on each color channel.	<b>—</b>	Paste Crop Rectangle from Clipboard: Pastes the current selection from the clipboard.
紨	Increase Brightness: Increases the brightness of the image.		Bypass Effects on Regions: Creates a split-screen preview that bypasses all video effects without removing them from your media.
			By clicking the drop-down arrow to the right of the button, you can choose which portion of the preview will display bypassed effects.

*1	Decrease Brightness: Decreases the brightness of the image.	<sub>K</sub>	Lock Aspect Ratio: Click if you want the selection box to retain its aspect ratio during resizing. When this button is not selected, the height and width can be resized independently.
			Press Alt at any time to override these settings.
OPT	Increase Contrast: Increases the contrast of the image.	<b>X</b>	Size About Center: Click if you want the selection box to retain its center point when you resize the box by dragging its edges. When this button is not selected, the opposite side of the selection box will remain anchored when you drag the edges to resize it.
			Press Alt at any time to override these settings.
Of	Decrease Contrast: Decreases the contrast of the image.	Q	Zoom Settings: Allows you to choose the magnification of the image. When <b>Auto</b> is selected, the image will zoom to fit the current window size.

# Crop and adjust properties

Use the Crop and Adjust Properties controls to specify the settings for adjusting an image's appearance or cropping. 

Item	Description		
Media	Displays the location and file name of the currently selected media file.		
Brightness	Use the <b>Brightness</b> controls to adjust the brightness of the image.		
	• Select the <b>Brightness</b> box, click the wbutton, and drag the slider (or type a value in the box) to adjust the overall brightness of the image.		
	_0r_		
	• Click the ★ button next to the <b>Brightness</b> box to display individual controls for the red, green, and blue channels in the image. Select the <b>Red</b> , <b>Green</b> , or <b>Blue</b> box, click the ✔ button, and drag the slider (or type a value in the box) to adjust the brightness of an individual color channel.		
Contrast	Use the Contrast controls to adjust the contrast of the image:		
	• Select the <b>Contrast</b> box, click the votation, and drag the slider (or type a value in the box) to adjust the overall contrast of the image.		
	_or_		
	• Click the   button next to the Contrast box to display individual controls for the red, green, and blue channels in the image. Select the Red, Green, or Blue box, click the  button, and drag the slider (or type a value in the box) to adjust the contrast of an individual color channel.		
Contrast center	Use the Contrast center controls to set the anchor point around which contrast is adjusted:		
	<ul> <li>Select the Contrast center box, click the  button, and drag the slider (or type a value in the box) to adjust the overall contrast of the image.</li> </ul>		
	—or—		
	Click the 🛨 button next to the Contrast center box to display individual controls for the red, green, and blue		
	channels in the image. Select the <b>Red</b> , <b>Green</b> , or <b>Blue</b> box, click the button, and drag the slider (or type a value in the box) to adjust the contrast center of an individual color channel.		
Colorize	Use the <b>Colorize</b> controls to add a color tint to the image:		
	1. Select the Colorize box and click the 👤 button to display a color picker.		
	2. Edit the selected color by performing any of the following actions:		
	<ul> <li>Drag the R, G, and B sliders to choose a color, and drag the vertical alpha slider to set transparency.</li> <li>Type values in the R, G, B, and A boxes.</li> <li>Select the eyedropper tool to sample a color from your screen.</li> <li>Click the button to switch between RGB and HSL color modes.</li> </ul>		
	When you're using the color picker, a warning / is displayed when you choose an out-of-gamut color. Click		
	the color swatch below the warning to correct the color.		
Alpha	Select the box, click the button, and drag the slider (or type a value in the box) to adjust the transparency of the image: drag left to increase transparency, or drag right to make the image more opaque.		

ltem	Description
Crop	Use the <b>Crop</b> controls to add a crop to the edges of the graphic to frame the image:
	<ul> <li>Select the Left box, click the button, and drag the slider (or type a value in the box) to trim the left edge of the image.</li> </ul>
	<ul> <li>Drag the Top slider (or type a value in the box) to trim the top edge of the image.</li> </ul>
	<ul> <li>Drag the Right slider (or type a value in the box) to trim the right edge of the image.</li> </ul>
	• Drag the <b>Bottom</b> slider (or type a value in the box) to trim the bottom edge of the image.

#### Cropping graphics

Perform either of the following procedures to crop a video or image:

Drag the handles on the selection box to adjust its size, or drag from the center of the box to change its position. The selection box represents the portion of the image that will be visible.

#### Notes:

- Click the Lock Aspect Ratio 🔙 button if you want the selection box to retain its aspect ratio during resizing.
- Right-click the selection box and choose Match Output Aspect to force the height: width ratio of the selection box to
  match the Video format setting in your Project Properties.

#### -or-


- 1. Click the 🛨 button next to the **Crop** box to expand the controls.
- 2. Use the **Crop** controls to add a crop to the edges of the graphic to frame the image:
  - a. Select the Left box, click the w button, and drag the slider (or type a value in the box) to trim the left edge of the image.
  - **b.** Drag the **Top** slider (or type a value in the box) to trim the top edge of the image.
  - c. Drag the Right slider (or type a value in the box) to trim the right edge of the image.
  - **d.** Drag the **Bottom** slider (or type a value in the box) to trim the bottom edge of the image.

# Crop and video effects keyframes

Keyframes can be used in DVD Architect to animate objects by cropping them or changing their size or position over time. Your keyframes define an object's settings at a given point in time. The Keyframe Controller, displayed at the bottom of the Crop and Adjust dialog, allows you to add and remove keyframes and control the parameters for individual keyframes. For more information, see Crop and adjust properties on page 57.

Each keyframe contains a set of parameters for a specified point on the timeline. The settings for intermediate frames are interpolated. Additional keyframes can be added to create more complex effects.

Crop and video effects keyframes are created using the Crop and Adjust window, while transformation (size and position) keyframes are created using the Timeline window. For more information, see Transformation keyframes on page 62.



### Adding keyframes

- 1. In the Keyframe Controller, click to position the cursor where you want to add a keyframe.
- 2. Click the Insert Keyframe button . A keyframe is added to the Keyframe Controller timeline.

The new keyframe's attributes are copied from the previous keyframe.

**Tip:** To quickly add a keyframe, double-click on the Keyframe Controller timeline, or position the cursor on the Keyframe Controller timeline and modify your cropping properties.

### **Deleting keyframes**

- 1. Select a keyframe by clicking it.
- 2. Click the **Delete Keyframe** button  $\bigcirc$ .

### Navigating between keyframes

To jump to the next or previous keyframe, click the Previous Keyframe 📀 and Next Keyframe 🕣 buttons (or press Ctrl+Left Arrow or Ctrl+Right Arrow).

To jump to the first or last keyframe, click the First Keyframe 📀 or Last Keyframe 🜖 button.

### Changing interpolation curves between keyframes

The interpolation curve determines the rate of animation between two keyframe settings. To change the interpolation curve, right-click a selected keyframe and choose a command from the shortcut menu. The curve type is updated for all selected keyframes.

Command	Description	Looks like
Linear 🔷	Keyframe parameters are interpolated in a linear path.	<b>*</b>
Fast 🔷	Keyframe parameters are interpolated in a fast logarithmic path.	<b>*</b>
Slow 🔷	Keyframe parameters are interpolated in a slow logarithmic path.	<b>\rightarrow</b>
Smooth 🔷	Keyframe parameters are interpolated along a smooth, natural curve.	<b>*</b>
Sharp 🔷	Keyframe parameters are interpolated along a sharp curve.	<b>*</b>
Hold 💠	No animation will take place. The keyframe's settings will be maintained until the next keyframe.	<u></u>

### Moving keyframes

After you've set your keyframes, you may need to adjust their positions along the Keyframe Controller timeline. Drag a keyframe to a new position in the timeline to change its position.

Hold Ctrl or Shift while clicking to select multiple keyframes. A selected keyframe is displayed as  $\, \diamondsuit \,$  , and an unselected keyframe is displayed as a  $\, \diamondsuit \,$ 

### **Editing crop settings**

After you've inserted your keyframes, you can use the **Crop** controls in the Crop and Adjust window's Properties pane to specify your cropping settings for individual keyframes.

- 1. In the Keyframe Controller, select the keyframe you want to edit.
- 2. In the Properties pane, click the button next to the Crop box to display the controls.
- **3.** Edit the crop settings. For more information, see Cropping graphics on page 58.


### Viewing and editing media properties

The Media Properties pane allows you to display information about the selected media file. The application will try to detect the properties of your media files automatically. In most cases, you will not need to edit file properties.


**Note:** Editing media properties will affect all instances of the media throughout your project.

#### Displaying the Media Properties window

- 1. Double-click a media file in the Project Overview window or the workspace area.
- 2. On the Media Properties pane, click Track Media.
- 3. Select the path to the file in the Audio or Video box.
- 4. Click the 🗷 button and choose Media Properties from the menu. The Media Properties dialog is displayed.



Video Media Properties



**Audio Media Properties** 

### **Editing media properties**

### General

The File name displays the name of the selected media file.

#### **Video Stream**

item	Description
Media attributes	Displays the size, resolution, and length of the selected media file.
Media format	Displays the format of the selected media file.
Frame rate	Displays the frame rate of the selected media file.
Field order	Allows you to choose the field order of the selected media file. It is recommended to review the documentation for your capture/video output card to ensure proper field order.
	• None (progressive scan) - Use for viewing on a computer; interlacing is ignored.
	• Upper field first - Use for video that will be viewed on a television.
	<ul> <li>Lower field first - Use if the Upper field first displays shaky output or if your hardware manual specifies lower field first.</li> </ul>
Pixel aspect ratio	Allows you to choose the pixel aspect ratio of the selected media file. It is recommended to review the documentation for your capture/video output card to ensure proper settings.
Alpha channel	Allows you to choose how the alpha channel will be handled for the selected media file.
	• <b>Undefined:</b> Video provides no alpha channel information and ignores any alpha channel information and in the file.
	• None: Video has no alpha channel or there is an alpha channel but it's completely opaque (solid).
	• Straight (unmatted): Transparency information is maintained in only the alpha channel. Alpha information must be applied to the RGB channels before compositing.
	<ul> <li>Premultiplied: The standard method of handling alpha information. Transparency information is maintained in the alpha and RGB channels, and the image is ready for compositing. No RGB component exceeds the alpha value.</li> </ul>
	• <b>Premultiplied (dirty):</b> Similar to <b>Premultiplied</b> , but RGB components may exceed the alpha. This setting is used mainly for images created by 3D applications involving compositing of 3D images over a non-solid color image background.
Background color	If you selected <b>Premultiplied</b> or <b>Premultiplied</b> ( <b>dirty</b> ) from the <b>Alpha channel</b> drop-down, then this allows you to choose the background color of the selected media file.

### **Audio Stream**

item	Description
Media attributes	Displays the size, resolution, and length of the selected media file.
Media format	Displays the format of the selected media file.

# **Opening in Graphics Editor**

If you need to edit a graphics file from your project, right-click a graphic in the workspace and choose Open in Graphics Editor from the shortcut menu (or select the Video box in the Properties window, click the 🗾 button, and then choose Open in Graphics Editor from the menu) to start your graphic-editing application and modify the selected image.

After you have edited and saved the file, DVD Architect software automatically detects the updated file updates it in the project.

You can specify the location of your preferred graphics editor on the Video Tab in the Preferences dialog. For more information, see Video tab on page 152.

### Moving and arranging objects

You have many options for moving, arranging, and aligning objects on your menus manually or automatically. Snapping features give you more precise control over the movement and alignment of your objects.

#### Changing the position of an object

- 1. Select a button, graphic, or text box with the selection tool ⋈, sizing tool ∰, or navigation tool ձ.
- 2. On the Menu Page Properties pane of the Properties window, click General.
- 3. Drag an object in the workspace or type values in the X position and Y position boxes to set the object's center point.

The X and Y coordinates are based on the frame size of your project. For example, if you're creating an NTSC project with a frame size of 720x480, (0,0) is the top-left corner of the frame, and (720,480) is the lower-right corner.

**Tips:** Hold Shift while dragging to defeat horizontal snapping. Hold Ctrl while dragging to defeat vertical snapping. Hold Alt while dragging to constrain to horizontal or vertical motion.

#### **Transformation keyframes**

Transformation keyframes allow you to change the size and position of a graphic over time, creating an animated effect. For example, you could use this feature to make a menu's button appear to move or to fly in from offscreen, or you could hide a menu's button until playback reaches the loop point.

Transformation keyframes are inserted and displayed in the timeline below your video track, and the keyframe size and position changes can be edited in the Properties window and in the workspace. You can use this feature for menus, picture compilations, and music/video compilations.

Using the timeline, you can drag keyframes to adjust their position, add and delete keyframes, and change the interpolation curve between keyframes.

#### Notes:

- Crop and video effect keyframes are set in the Crop and Adjust window and are not visible in the timeline. For more information, see Crop and video effects keyframes on page 58.
- To insert transformation keyframes for a button, **Show Before Loop Point** must be set to **Yes** for the object in the Transformations page in the item's Properties window, and the loop point must be set to a point later than 00:00:00.000 on the timeline.
- Transformation keyframes are not available for buttons on video or for graphics inserted on video titles. For more information, see Adding buttons to videos on page 102.

### Adding transformation keyframes

- 1. In the workspace, select the item to which you want to add a keyframe.
- 2. In the Timeline window, right-click in the Transformations keyframe bar below your video track and choose Insert from the shortcut menu. A keyframe is added to the Transformation keyframe bar.
- 3. Subsequent keyframe's attributes are copied from the previous keyframe.

**Tips:** To quickly add a keyframe, perform any of the following steps:

- Double-click on the Transformation keyframe bar.
- Position the cursor on the Transformation keyframe bar and modify your Transformation properties in the Properties window.
- Select the keyframe tool in the workspace and drag the object. For more information, see The Keyframe tool on page 64.

### Removing keyframes

Right-click a keyframe and choose **Delete** from the submenu.

### Changing the interpolation curve between keyframes

The interpolation curve determines the rate of animation between two keyframe settings. To change the interpolation curve, right-click a selected keyframe and choose a command from the shortcut menu. The curve type is updated for all selected keyframes.

Command	Description	Looks like
Linear 🔷	Keyframe parameters are interpolated in a linear path.	<b>*</b>
Fast 🔷	Keyframe parameters are interpolated in a fast logarithmic path.	<b>\$</b>
Slow 🔷	Keyframe parameters are interpolated in a slow logarithmic path.	<b>\$</b>
Smooth 🔷	Keyframe parameters are interpolated along a smooth, natural curve.	<b>*</b>
Sharp 🔷	Keyframe parameters are interpolated along a sharp curve.	<b>*</b>
Hold •	No animation will take place. The keyframe's settings will be maintained until the next keyframe.	

#### Moving keyframes

After you've set your keyframes, you may need to adjust their positions along the timeline. Drag a keyframe to a new position in the timeline to change its position.

Hold Ctrl or Shift while clicking to select multiple keyframes. A selected keyframe is displayed as 🧇 , and an unselected keyframe is displayed as a  $\diamondsuit$ .

### Editing size and position settings

After you've inserted a keyframe, you can set the size and/or position settings for the object in the Transformation page of the Properties window.

**Note:** You can use the keyframe tool in the workspace for a visual representation of an item's keyframe size and position


- 1. In the workspace, select the object to which you have added keyframes. For more information, see Workspace (Alt+0) on page 15.
- 2. In the Properties window, click the Transformations button.
- 3. Edit the size and position settings on the Transformations page.

### The Keyframe tool

From the Edit menu, choose **Editing Tool**, and then choose **Keyframe Tool** to view and edit information about the size and position changes defined by an object's transformation keyframes. For more information, see **Transformation** keyframes on page 62.

**Tip:** If you want to view size and position changes even when the keyframe tool is not selected, choose **Workspace Overlays** from the View menu, and then choose **Show Keyframe Overlay** from the submenu. Select objects with the keyframe overlay displayed to see a graphical display of size and position changes for the object.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. Select an object in the workspace with the keyframe tool . Lines and arrows are displayed to indicate the currently assigned path. Control points mark the location of keyframes along the path. For more information, see Workspace (Alt+0) on page 15.

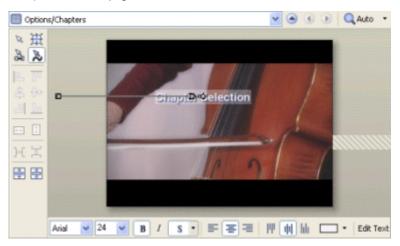

3. Drag the keyframe control points to edit an object's position or path. Using the control points, you can also create Bézier curves that the object will follow during the animation. If you have multiple keyframes, intermediate control points are inserted as pairs so you can set your tangent. Edit the intermediate control points by right-clicking and choosing an option from the shortcut menu:

ItemDescriptionSmoothAs you drag a control point, the tangent follows a straight line, and the paired control points remain equidistant from the main path.StraightAs you drag a control point, the tangent follows a straight line, but the other control point retains its original distance from the main path.CornerAs you drag a control point, the location of the other control point remains fixed, allowing you to create an angled tangent from the main path.

**Tip:** These settings cannot be applied to end control points, which mark the first and last keyframes in a series.

**Note:** You can also use the Transformations page in the Properties window to view and edit object size and position.

### Editing button order for a menu

From the Edit menu, choose Button Order to display the Button Order dialog, where you can set the order for buttons on the selected menu.

The #1 button is the default selected button when you navigate to a menu unless you've used the **Destination Button** control on the Action or End Action page of the Properties window to specify a different destination button. For information editing buttons on video, see Editing button order for a video on page 103.

- 1. Choose the menu you want to edit:
  - Select a menu in the Project Overview window.

Click the down arrow in the address bar to select a menu.

- Click the Back to Parent 📤 , Previous Page 🕙 , and Next Page 🕟 buttons in the workspace to navigate your
- 2. From the Edit menu, choose Button Order. The Button Order dialog is displayed.

By default, the button order matches the order in which you added buttons to the menu. If you started with a blank menu and added a picture compilation and then a music/video compilation, the picture compilation would be the default (first) button.

- 3. Select a button and click the Move Up or Move Down buttons to change the selected button's order.
- Repeat step 3 as needed.

For a menu, the #1 button is the default selected button. The order of subsequent buttons has no effect on your menu.

5. Click **OK** to close the Button Order dialog and save your changes.

### Aligning objects in a menu

- **1.** Select the selection ⋈, sizing ∰, or navigation ቕ tool.
- 2. Select the objects you want to align. You can select multiple objects at once using the Shift key for consecutive files or the Ctrl key for nonconsecutive files.
- 3. While holding the Ctrl or Shift key, select the object to which you want to align the selected objects.
- **4.** Click a button on the left edge of the workspace:

Tool	Name	Description
	Align Left	Aligns all selected objects to the left edge of the last-selected object.
\$	Align Horizontal Center	Aligns all selected objects to the horizontal center of the last-selected object.
	Align Right	Aligns all selected objects to the right edge of the last-selected object.
10	Align Top	Aligns all selected objects to the top edge of the last-selected object.
Ю	Align Vertical Center	Aligns all selected objects to the vertical center of the last-selected object.
<u>In</u>	Align Bottom	Aligns all selected objects to the bottom edge of the last-selected object.

#### Automatically aligning objects based on current theme

If you've applied a theme to a menu, menu objects can automatically align when you add media to the menu.

Select the Double-clicking files in Explorer reapplies theme layout check box on the General tab of the Preferences dialog if you want to automatically realign objects according to the current theme when you double-click media files in the Explorer window. When you double-click a file, the new file is added, and the objects are realigned on the menu.

When the check box is cleared, the media files are added to the menu and existing object positions are preserved.

From the **Edit** menu, choose **Reapply Theme Layout** to realign objects at any time. For more information on themes, see Working with themes on page 123.

**Note:** If you created menus using layered .psd files, choose **Reapply Layout from File** from the **Edit** menu to restore the menu to match the appearance of the saved .psd file. Reapplying a file's layout to menu objects on page 40.

### **Centering objects**

- 1. Select the selection tool ⋈, sizing tool ∰, or navigation tool ձ.
- 2. Select the objects you want to align. You can select multiple files at once using the Shift key for consecutive files or the Ctrl key for nonconsecutive files.
- **3.** Click a button on the left edge of the workspace:
  - The Horizontal Centering button 🔢 moves the selected objects to the horizontal center of the screen.
  - The Vertical Centering button moves the selected objects to the vertical center of the screen.

### Adjusting object spacing

- 1. Select the selection tool ▼, sizing tool ♯ or navigation tool ቕ.
- 2. Select the objects you want to adjust. You can select multiple files at once using the Shift key for consecutive files or the Ctrl key for nonconsecutive files. You must have at least three objects selected to adjust the objects' vertical or horizontal spacing.
- **3.** Click a button on the left edge of the workspace:

  - The Space Down button <a> adjusts</a> the selected items so an equal amount of vertical space exists between objects.

### **Deleting objects**

- 1. Select the selection tool ⋈, sizing tool ⊞, or navigation tool .
- 2. Select the objects you want to delete. You can select multiple files at once using the Shift key for consecutive files or the Ctrl key for nonconsecutive files.
- 3. From the Edit menu, choose Delete. The objects are deleted from the menu and from your project.

### **Enabling snapping**

To use snapping, choose **Enable Snapping** from the **Options** menu. Once snapping is enabled, there are several options to which objects can snap:

- The grid in the workspace.
- · The borders of other objects.
- · Title and action safe areas.

**Tip:** To temporarily override horizontal snapping, hold the Shift key. To temporarily override vertical snapping, hold the Ctrl key.

### Snapping to the grid

Once snapping is enabled, choose Snap to Grid from the Options menu to allow objects to snap to the workspace's grid. To show or hide the grid, choose Workspace Overlays from the View menu, and then choose Show Grid from the submenu.

**Note:** To change the color or spacing of the grid, choose **Grid Settings** from the **Options** menu.

#### Snapping to other objects

Once snapping is enabled, choose Snap to Objects from the Options menu to allow objects to snap to other objects on the menu.

### Snapping to safe areas

Once snapping is enabled, choose Snap to Safe Areas from the Options menu to allow objects to snap to the title safe or action safe areas.

The title safe area indicates the region within which titles will always be visible on a television monitor. To show or hide this area, choose Workspace Overlays from the View menu, and then choose Show Title Safe Area from the submenu.

The action safe area indicates the region within which motion will always be visible on a television monitor. To show or hide this area, choose Workspace Overlays from the View menu, and then choose Show Action Safe Area from the submenu.

# Using automatic button actions

Usually, a user must press the Enter button on the DVD remote control to perform an action. However, with the automatic button feature, the button's action is performed when the button is selected. See Action on page 68 for more information on the auto-activate feature.

**Note:** Automatic button actions are useful for navigation buttons, such as previous/next page buttons in multipage menus. This will allow the DVD to automatically advance to the next page as soon as the Next Page button is selected.

### **Button properties**

The Button Properties pane in the Properties window is available when you have a button selected in the workspace. Use these controls to change the appearance, behavior, and navigation settings for the selected button.

To edit the button's properties, perform the following steps:

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- Select a button with the selection tool , sizing tool # or navigation tool
- Click the property button that you would like to edit. 3.
- Click the specific property, click the v button, and choose a setting from the drop-down list.



# **Transformations**

Item	Description
X position	Allows you to edit the X and Y position values to change the center of the selected button's position.
Y position	Perform any of the following to change the setting:
	Select the number and type a new value.
	Use the spin controls to adjust the value.
	• Select the value and click the 💌 button to display a slider that you can use to adjust the value.
	<b>Note</b> : These coordinates are based on the frame size of your project. For example, if you're creating an NTSC project with a frame size of 720x480, (0,0) is the top-left corner of the frame, and (720,480) is the lower-right corner.
X size	Allows you to edit the X and Y size values to change the size of the selected button.
Y size	Perform any of the following to change the setting:
	Select the number and type a new value.
	Use the spin controls to adjust the value.
	• Select the value and click the 💟 button to display a slider that you can use to adjust the value.
Maintain aspect ratio	Allows you to choose if you want the button image to be stretched when you change the height or width.
Show Before Loop Point	Click the visible before the loop point.

### Action

 $\label{lem:controls} Action controls determine what happens when a user selects a button on your menu.$ 

Item	Description
Command	Determines what happens after the last track plays.
	<ul> <li>Link: you can link to any menu, media file, and chapter point. Use the Destination, Destination chapter, Destination item, or Destination button controls to set the target. You can also use the Destination button control to choose the default selected button in the destination menu.</li> </ul>
	Stop: playback will stop of the current title.
	• Resume: the button will resume playback of the current title from the point when a Stop button was selected. If the title specified in the Destination control is not the last title played, playback will begin at the start.
Destination	When <b>Link</b> is selected in the <b>Command</b> drop-down list, choose the menu, title, or playlists that will be displayed.
	When <b>Resume</b> is selected in the <b>Command</b> drop-down list, choose the video, picture compilation, or music compilation that will resume playback when the button is activated.
Destination chapter	When your button links to a title or playlist, use the <b>Destination Chapter</b> drop-down list to choose the specific chapter in the destination file that will be displayed.
Destination item	When your button links to a menu, choose <b>Start</b> or <b>Loop Point</b> to indicate the point from which the menu will be played.
Destination button	When your button links to a menu, use the <b>Destination button</b> drop-down list to choose the button you want to use as the default selected button in the destination menu.
	If you choose <b>Default</b> , the first button listed under the menu in the Project Overview window is used as the default.
Set audio track	Choose a setting from the drop-down list to choose which audio track will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set audio track</b> control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set subtitle track	Choose a setting from the drop-down list to choose which subtitle track will be played in a destination title. Choose <b>Off</b> to turn subtitles off, or choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set subtitle track</b> control to change the subtitle track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.

ltem	Description		
Set video angle	Choose a setting from the drop-down list to choose which video angle will be played in a destination title. Choose <b>No change</b> to use the last-set track.		
	<b>Note</b> : If you use the <b>Set video angle</b> control to change the video angle, the new angle will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the angle.		
Auto-activate	Allows you to choose whether you want the button action to be performed automatically when the button is selected.		
	• When <b>Yes</b> is selected, the user doesn't need to press the Enter button on the DVD remote control.		
	• When <b>No</b> is selected, the user will select a button with the arrow buttons on the DVD remote control and then press the Enter button to activate it.		

#### Media

The media controls determine the image displayed for buttons that navigate to picture compilations, music/video compilations, or video titles.

#### **Button style**

The button style determines how the selected button is displayed on your menu.

- · Choose Text only to display a text-only link.
- · Choose Image only to display a graphical button only.
- Choose **Text and image** to display a graphical button with a text label.

#### Thumbnail and frame media

A button's thumbnail can be any simple image file or video file you want to use. If you choose a video file, you can use a single frame from the video to display in the button, or you can animate the button by playing the video.

The **Thumbnail Media** and **Frame Media** boxes display the path to the current thumbnail and frame image file.

**Tip:** You can quickly replace a button by selecting the button in the workspace and double-clicking a button in the Buttons window. For more information, see Buttons window (Alt+5) on page 18.

## Mask

A mask file determines which part of the thumbnail or mask file is visible. For more information, see Creating custom masks on page 117.

Select a command from the menu, where you can choose a mask file, view media properties, crop and adjust media settings, remove the current file, or open in a graphics editor.

For additional mask controls, click the **±** button to the left of the **Mask** heading.

ltem	Description	
Layer	If the current mask file uses layers, then this control allows you to choose a single layer or the combined layers	
	as a mask for your thumbnail image or button frame.	

## Start time

If you're using an animated file as a thumbnail or button frame, the **Start time** setting determines the point at which playback will start in the animated button or frame. If you want to display a single frame from an animated file as a static image or button frame, the Start time setting determines which frame is displayed.

To change the start time, select the box and type a new setting or select the box and click the 🗾 button to display a slider that you can use to adjust the setting.

#### Style

If you're using an animated file as a thumbnail or frame, you can choose a setting from the **Style** drop-down list to determine whether the button or frame is displayed as a still image or animated button.

- Choose Still to display a static image in the button or the frame. If your thumbnail or frame file is animated, the Start time setting determines which frame is displayed.
- · Choose Animated to play an animated file in the button frame.

#### Highlight

#### Style

Highlight controls determine the appearance of a button when it is selected and activated.

Item	Description
Rectangle	Displays a colored rectangle over the button's text and image.
Mask overlay	Highlights the button's text and image.
Text rectangle	Displays a colored rectangle around the button text.
Image rectangle	Displays a colored rectangle around the button image.
Text mask overlay	Highlights the button text.
Image mask overlay	Highlights the button image.
Underline	Displays an underline under the button.
Custom	Allows you to specify a custom highlighting mask image and transparency style.

#### Mask

If you selected **Custom** from the **Style** menu, select the **Mask** box and click to display a menu where you can choose a mask file, view media properties, crop and adjust media settings, remove the current file, or open in a graphics editor.

For additional mask controls, click the ± button to the left of the **Mask** heading.

ltem	Description
Layer	If the current mask file uses layers, then this control allows you to choose a single layer or the combined layers as a highlight mask.
	<b>Note:</b> If you want to use the combined layers as a mask, choose <b>Composited layer</b> .

## Mask mapping

If you selected **Custom** from the **Style** menu, select the **Mask mapping** box, click the button, and choose a setting to indicate how transparency is determined from the mask image:

Mapping Mode		Description	Pixel Information
	Transparency	Maps the alpha channel of the menu highlight mask to the four colors used in the color set selected in the Selected button colors or Activated button colors drop-down list on the General page of the Menu Page Properties pane.	The most opaque pixels (those with alpha values of 192 to 255) are mapped to the color set's fill color (color 1), and the most transparent pixels (those with alpha values of 0 to 63) are mapped to the color set's transparent color (color 4).
	Intensity	Maps the average pixel intensity of the menu highlight mask to the four colors used in the color set selected in the Selected button colors or Activated button colors drop-down list.	The lightest pixels (those with an average intensity of 192 to 255) are mapped to the color set's fill color (color 1), and the darkest pixels (those with an average intensity of 0 to 63) are mapped to the color set's transparent color (color 4).

Mapping Mode		Description	Pixel Information
	Color Channel	Maps color channels in the menu highlight mask to the four colors used in the color set selected in the <b>Selected button colors</b> or <b>Activated button colors</b> drop-down list.	A pixel containing any red channel component uses the color set's fill color (color 1), a pixel containing any green channel component uses the color set's anti-alias color (color 2), a pixel containing any blue component uses the color set's outline/background color (color 3), and a completely black pixel uses the color set's transparent color (color 4).

#### **Navigation**

The navigation controls determine which button is selected when you use the Left, Right, Up and Down buttons on your DVD remote control.

Select the Left, Right, Up, or Down box, click the 🗷 button, and choose a setting to indicate which button is selected when you press the corresponding button on your remote control.

**Note:** Choose **Auto** if you want the software to automatically determine navigation based on button layout.

#### Color Sets

Color sets determine which colors are used to indicate selected, activated, and inactive buttons on your menu page. You can have four project-wide color sets that are available to every menu page in your project, and each menu page in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/ background color, anti-alias color, and transparent color.

Use the Color Sets page to edit the color sets that will be available for the selected menu, and then use the General page in the Menu Page Properties pane to choose which color sets are used for the selected, activated, and inactive buttons on your menu. For more information, see Using color sets on page 54.

#### **Button Region**

The button region control allows you to set the highlight colors for buttons within button regions on the timeline. For more information, see Inserting buttons-on-video markers on page 98.

#### Selected button colors

Select the V button and choose a color set that will be used to display the selected button on a page. Choose None if you do not want to use color sets to display button highlighting.

#### **Activated button colors**

Select the 💙 button and choose a color set that will be used to display the selected button when you press Enter on the remote control to activate it. Choose None if you do not want to use color sets to display button highlighting.

#### Inactive button/subtitle colors

For additional button controls, select the + button to the left of the Inactive Button/Subtitle Colors heading.

ltem	Description
Default colors	Select the button and choose a color set that will used to display unselected buttons on the menu. Choose <b>None</b> if you do not want to use color sets to display button highlighting
Use subtitle colors	If there are buttons placed in a graphic subtitle, you can set the color of the unselected buttons. Select
	the button and choose <b>No</b> if you don't want to use color sets for unselected buttons. Select <b>When</b> available if a color set has been designated for the subtitle.

## Copying and pasting attributes

Would you like to be able to quickly apply settings from one item in your project to another? Well, now you can with the paste attributes feature. You can paste any one or all of the following attributes:

- Button Frame
- Media Effects
- Text Properties
- Size
- Size and Position
- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu that has the object that you want to copy.
- 2. Select the object or objects with the selection tool ▷, sizing tool ☒ or navigation tool ቕ.
- 3. From the Edit menu, choose Copy.
- **4.** Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu that has the object that you would like to edit.
- 5. Select a button, text box, or graphic with the selection tool 🔻 , sizing tool 🗮 or navigation tool 🔉.

Press Ctrl or Shift while clicking to select multiple items.

6. From the Edit menu, choose Paste Attributes, and then choose one of the following items from the submenu:

Item		Description
	Button Frame	Replaces the button frame and associated mask of the selected object with the attributes from the button you copied.
FX	Media Effects	Replaces media effects of the selected object with the attributes from the object you copied.
T	Text Properties	Replaces text properties of the selected object with the attributes from the text you copied.
		<b>Note</b> : The actual text is not replaced.
掛	Size	Changes the size of the selected object with the size of the object you copied.
Ħ	Size and Position	Changes the size and position of the selected object with the size and position of the object you copied.
	All	Replaces all attributes of the selected object with the attributes of the copied object.


When you are copying and pasting attribute and have multiple objects selected, the software will assign attributes according to the following rules:

- If you copy a single object and paste size and position (or all attributes) to multiple selected objects, attributes will be
  pasted to the first object only to avoid creating overlapping objects.
- Properties are pasted from objects of the same type: text attributes are pasted to text objects, graphic properties are pasted to graphic objects, and button properties are pasted to buttons. However, you can paste size, position, and media effects between buttons and graphic objects.
- Button properties are pasted based on the order in the Project Overview window: for example, if you copy buttons 1 through 3 in one menu and then paste attributes to buttons 1 through 3 in another menu, attributes will be pasted from button 1 to button 1, button 2 to button 2, and button 3 to button 3. If you copy buttons 1 through 3 in one menu and then paste attributes to buttons 5 through 7 in another menu, attributes will be pasted from button 1 to button 5, button 2 to button 6, and button 3 to button 7.
- Properties are pasted based on object position: for example, if you copy two text objects in one menu and then paste attributes to two text objects in another menu, the attributes from each text object in the source menu will be pasted to the closest text object in the destination menu.

## The Navigation tool

Navigation controls determine which button is selected when you use the Up, Down, Left, and Right buttons on your DVD remote control.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- From the Edit menu, choose Editing Tool, and then choose Navigation Tool.



**3.** Select a button in the workspace. Arrows are displayed to indicate the current navigation.

**Note:** White arrows represent autolinked navigation while blue arrows represent links that have been manually set.



on button navigation:

If	Then
You want the application to automatically assign navigation based on the button layout	Right-click a navigation anchor and choose <b>Autolink</b> from the shortcut menu (or double-click the anchor).
	<b>Note</b> : This setting only affects the navigation anchor that you click.
You want to link a button to the current	Right-click a navigation anchor and
page	choose <b>Link to Self</b> from the shortcut menu.

## Setting object order

Object order specifies the layering of objects on your menu. Objects with lower numbers are located toward the bottom. The larger the number, the closer the object is to the front.

## Viewing object order

To view the numbers assigned to each object in the current menu, choose Workspace Overlays from the View menu, and then choose Show Object Order from the submenu.

## **Changing object order**

- 1. Click the object you want to move forward or backward in the layer.
- 2. From the Edit menu, choose Object Order, and then choose the appropriate layering command from the submenu:
  - Move to Top moves the selected object to the top layer
  - Move to Bottom moves the selected object to the bottom layer
  - Move Forward moves the selected object forward one layer
  - Move Back moves the selected object back one layer

## **Chapter 5** Creating a Music/Video Compilation

You can create a DVD Architect project that contains a single music or video compilation, or you can add a music/video compilation to an existing menu.

A music/video compilation contains a list of audio or video files. You can display text (such as a song title or caption) while each file plays, and for music compilations, you can choose a video or image to display in the background.

In a video compilation, you create a series of videos that play sequentially. This sort of video compilation behaves much like a playlist, but it will be written to your DVD as a single video title set. If you have a project with many short videos, this loophole in the 99-title-set limitation imposed by the DVD specification can save you from rerendering and combining media. For more information, see Adding a playlist to a menu on page 93.

**Tip:** If the audio in a compilation item is longer than the video, the last frame is frozen until the end of the audio. If the video is interlaced, some DVD players will not display this frame correctly. Recompressing your compilation as progressivescan video will avoid this problem.

On the Video tab of the Optimize DVD dialog, click the Progressive box and choose Yes or Auto for your music/video compilation. If you choose Yes, each compilation item is recompressed as a separate progressive-scan title. If you choose Auto, each compilation item is recompressed as a separate title and will match the format of the source media. If the audio is longer than the video, the compilation item will be recompressed as progressive-scan video to prevent artifacts when the last frame is held. For more information, see Optimizing your project on page 34.

Note: Each title on your DVD can have no more than 99 chapter markers. If your compilation contains more than 99 songs or videos, chapter markers will be created only for the first 99 songs/videos. If you want to navigate past song/video 99, you can use the Fast Forward button on your DVD player (Previous/Next Chapter buttons allow navigation through the first 99 songs/videos only).

If you're creating a music compilation DVD, you already know how to start a project and locate your media (see Getting Started on page 23).

## Adding a music/video compilation to a menu

If you want to add a music or video compilation to a menu in an existing menu-based project, the process is easy.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu from which you want to link to the music/video compilation.
- From the Insert menu, choose Music/Video Compilation. A button is added to the menu as a link to the compilation.



Click the Insert Object 👆 button in the Project Overview window and then click the Insert Music/ Video Compilation button 1/2 .


3. Double-click the music/video compilation's button to begin assembling your compilation.

**Tip:** Buttons can be added to music or video compilations. For more information, see Adding buttons to videos on page


## Adding audio

There are several ways to add audio to your compilation:

- Use the Explorer window to locate and select audio files and drag them
  to the Compilation window. You can select multiple files at once using
  the Shift key for consecutive files or the Ctrl key for nonconsecutive files.
  Files are added to the compilation list wherever you drop them.
- Use the Explorer window to locate audio files. Double-click on a file to add it to the bottom of the list in the Compilation window.



00:01:40.702



## Replacing an audio file

There are several ways to replace a song's audio:

- Right-click a song in the Timeline and choose Set Audio from the shortcut menu. The Set Audio dialog is displayed.
   Select a new song and click the Open button. The audio is replaced with your new selection.
- Drag an audio file from the Explorer window or Microsoft Windows® Explorer onto an existing song in the Compilation
  window. The existing song is replaced with the dragged file.
- Drag an audio file from the Explorer window or Microsoft Windows Explorer and drop it on a song in the Timeline window.
- Select a song in the Compilation window. From the Edit menu, choose Song Audio and then choose Set. The Set Audio
  dialog is displayed. Select a new song and click the Open button. The audio is replaced with your new selection.
- On the Music Compilation Properties pane, click the Slide button. Click Audio, click the button, and choose Replace
  from the menu. The Open Media dialog is displayed. Select a new song and click the Open button. The audio is
  replaced with your new selection.

## Adding and editing images or videos

#### Inserting images or videos

You can choose an image or video for each song in your compilation. The image or video will display on screen while the song is playing.

**Note:** If you have a display device that is susceptible to burn-in (such as a rear-projection television), do not use static text or bright static graphics in any scene that will be displayed on screen for an extended period of time.

There are several ways to add an image or video to a song:

- Select a song. In the Explorer window, double-click an image. The image is added to the selected song.
- Select a song. From the Edit menu, choose Song Video/Image, and then choose Set from the submenu. The Set Video/Image dialog is displayed. Select an image and click the Open button. The image or video is added to the song.
- · Select an image in the Explorer window and drag it to a song.
- Right-click a song and choose Set Video/Image from the shortcut menu. The Set Video/Image dialog is displayed.
   Select an image and click the Open button. The image or video is added to the song.
- On the Music Compilation Properties pane, click the Slide button. Click Video, click the 

   □ button, and choose Replace from the menu. The Open Media dialog is displayed. Select a new video or image file and click the Open button. The video or image is replaced with your new selection.

#### Replacing an image or video

- 1. Right-click the image you want to replace and choose **Set Video/Image** from the shortcut menu. The Set Video/Image dialog is displayed.
- 2. Select a replacement file and click the Open button.

## Setting image stretching or scaling

You can use the tools at the top of the Compilation window to rotate a song's image or set the stretch type that will be used to scale the image.

- 1. Select an item in the Compilation window.
- 2. On the Music/Video Compilation Properties pane, click the Slide button.
- 3. Click Stretch type, click the Dutton and choose one of the following stretch types:
  - Letterbox the image is displayed without scaling, and black letterboxing bars are added above and below or on the sides as needed.
  - **Zoom to fit** the image is magnified to fill the screen.
  - **Stretch to fit** the image is stretched to fill the screen. This may cause distortion in the image.

#### Rotating an image

- 1. Select a song in the Compilation window.
- Click the **Rotate counter-clockwise** or **Rotate clockwise** button.

## Adjusting brightness and contrast or editing the image

- 1. Double-click a music/video compilation in the Project Overview window (or navigate in the workspace) to open the music compilation that you want to edit.
- 2. Select an item in the Compilation window.
- 3. Use the buttons at the top of the Compilation window to adjust the appearance. For more information, see Compilation window (Alt+7) on page 19.

-or-

On the Music/Video Compilation Properties pane, click the Slide button. Select Video, click the 📦 button and choose Crop and Adjust (to display the Crop and Adjust dialog) or Open in Graphics Editor (to edit the image in an external image editor) from the menu. For more information, see Cropping and adjusting video and graphics on page 55.

## Adding and editing text

#### Adding text

You can add text to be displayed while each song is playing.

Note: If you want the song name automatically inserted for each song, choose Auto-Insert Track Title from the Options menu.

- 1. Select a song in the Compilation window.
- From the Insert menu, choose Text. A text box is added to the workspace.
- **3.** Type your text in the text box.

## Formatting text

- 1. Select a song in the Compilation window.
- 2. If necessary, click the selection tool 🔻 or sizing tool 🎹 in the editing toolbar to make it the active tool.
- 3. In the workspace, click the text box and use the text bar to edit your text properties:
  - Choose a font from the drop-down list to set the typeface for your text.

- Choose a font size from the drop-down list. Choose Auto to have the text automatically adjust to fit the size of the text box.
- Click the **Bold B**, **Italic 1**, or **Shadow s** buttons to toggle your font effects as desired.
- Set your text justification options as desired. For more information, see Text toolbar (Alt+2) on page 16.
- Click the down arrow next to the color swatch button to display the color picker, where you can set the red, green, blue, and alpha channels for your text.

## Moving text

- 1. Select a song in the Compilation window.
- 2. If necessary, click the selection tool \( \sigma \) in the editing toolbar to make it the active tool.
- 3. In the workspace, drag the text box to the desired location, or click **Transformations** in the Properties window to type a new location for the text box in the **X position** and **Y position** boxes.

**Tip:** You can also use transformation keyframes to animate text in your project. For more information, see *Transformation keyframes on page 62*.

## **Deleting text**

- 1. Select a song in the Compilation window.
- 2. If necessary, click the selection tool \( \sigma \) in the editing toolbar to make it the active tool.
- 3. In the workspace, select the text box you want to delete.
- 4. From the Edit menu, choose Delete.

**Tip:** You can add graphics to text and use keyframes to animate them. For information about adding graphics and using keyframes, see Adding graphics on page 47 and Transformation keyframes on page 62.

## Setting thumbnail display

You can set the size of the thumbnail displayed for the song images in the Compilation window. Click the sutton to the right of the Thumbnail Size button and choose Small, Medium, or Large to select the desired size.

## Music/video compilation properties

The Music/Video Compilation Properties pane in the Properties window allows you to adjust the end actions and remote control button behavior for the selected music or video compilation.

To edit the music or video compilation's properties, perform the following steps:

- 1. If the window isn't already visible, choose **Properties** from the View menu.
- 2. Double-click a music or video compilation in the Project Overview window (or navigate in the workspace) to open the compilation you want to edit.
- **3.** Click a button at the top of the Properties window.



#### General

Select the Reduce interlace flicker box, click the 🚩 button, and choose a setting from the drop-down list to turn flicker reduction on or off. Turn flicker reduction on when using still images that contain thin horizontal lines.

If you have already created at least one DVD script in your project, select the Start Script box, click the 🔻 button, and choose the script that will be played when the music/video compilation is accessed.

#### **End Action**

A music or video compilation's end action determines what happens after the last song is played.

Item	Description
Command	Determines what happens after the last track plays.
	<ul> <li>Link: you can link to any menu, media file, and chapter point. Use the Destination, Destination chapter, Destination item, or Destination button controls to set the target. You can also use the Destination button control to choose the default selected button in the destination menu.</li> </ul>
	Stop: your DVD will stop playing after the last song.
Destination	When <b>Link</b> is selected in the <b>Command</b> drop-down list, choose the menu or media file that will be displayed.
	Note: If no menu has been displayed, Most recent menu will display the first menu on the disc.
Destination chapter or	When your end action links to a video, music/video compilation, or picture compilation, choose the specific chapter in the destination file that will be displayed.
Destination item	When your end action links to a menu, choose <b>Start</b> or <b>Loop Point</b> to indicate the point from which the menu will be played.
Destination button	When your end action links to a menu, you can choose the button you want to use as the default selected button in the destination menu.
	If you choose <b>Default</b> , the first button listed under the menu in the Project Overview window is used as the default.
Set audio track	Choose a setting from the drop-down list to choose which audio track will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set audio track</b> control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set subtitle track	Choose a setting from the drop-down list to choose which subtitle track will be played in a destination title. Choose <b>Off</b> to turn subtitles off, or choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set subtitle track</b> control to change the subtitle track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set video angle	Choose a setting from the drop-down list to choose which video angle will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set video angle</b> control to change the video angle, the new angle will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the angle.

#### **Remote Buttons**

For each music/video compilation, you can allow or suspend operation of individual buttons on the DVD player's remote control. Turning buttons on or off helps to ensure the viewer will see your DVD as you intended it.

If you have an animated menu, for example, turning off buttons will prevent the user from navigating away from the menu before it's finished playing.

To turn each button on or off, choose **On** or **Off** from the menu.

**Note:** When **Off** is selected from the menu, the button is not available.

ltem	Description		
Title play	Allows the user to press the Title button on the remote to skip to a specific video or music/video compilation.		
Stop	Allows the user to press the Stop button on the remote to stop the DVD.		
Time/chapter search	Allows the user to press the Time button on the remote to skip to a specific play time or chapter.		
Previous/up	Allows the user to press the Previous/Up button on the remote to navigate to the previous chapter or menu page.		
Next	Allows the user to press the Next button on the remote to navigate to the next chapter or menu page.		
Fast scan	Allows the user to press the Fwd button on the remote to seek forward through a video, music/video compilation, or picture compilation.		
Backward scan	Allows the user to press the Rev button on the remote to seek backward through a video, music/video compilation, or picture compilation.		
Top menu	Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.		
Menu	Allows the user to press the Menu button on the remote during playback.		
	Click the 🛨 button to expand the <b>Menu</b> controls so you can define the behavior of the Menu button for media files, picture compilations, and music/video compilations. For more information, see End Action on page 79.		
Resume	Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.		
Button navigation	Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.		
Pause	Allows the user to press the Pause button on the remote to temporarily suspend playback.		
Audio track change	Allows the user to press the Audio button on the remote to choose which audio track is played.		
	<b>Note</b> : Choose <b>No Change</b> to use the last-set track.		
Subtitle track change	Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.		
	<b>Note</b> : Choose <b>No Change</b> to use the last-set track.		
Video angle change	Allows the user to press the Angle button on the remote to choose which video track is played.		
Video mode	Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed, and pan-and-scan presentation in a 16:9 video.		

## Slide

The Slide page of the Properties window displays the settings for the slide selected in the Compilation window.

## Video

The Video control displays the path to the image or video file that will be used.

Select the control and click the button to display a menu, where you can choose a file, view media properties, crop and adjust media settings, remove the current file, open the file in your specified graphics editor, or explore the file's containing folder on your drive. For more information, see Cropping and adjusting video and graphics on page 55.

**Tip:** You can also change the slide image by dragging a new image from the Explorer window to the **Video** box or to a song in the Compilation window.

#### Audio

The Audio control displays the path to the background audio file that will be used.

Select the control and click the button to display a menu, where you can choose a file, view media properties, remove the current file, open the file in your specified graphics editor, or generate music using the Cinescore plug-in. For more information, see Generating music with Cinescore on page 116.

**Tip:** You can also change the audio by dragging a new audio file from the Explorer window to the **Audio** box or to a slide in the Compilation window.

## Stretch type

Select the box, click the 💌 button, and choose a setting from the drop-down list to indicate how the image will be scaled to fit the screen.

ltem	Description
Letterbox	The image is displayed without scaling, and black letterboxing bars
	are added above and below or on the sides as needed.
Zoom to fit	The image is magnified to fill the screen.
Stretch to fit	The image is stretched to fill the screen. This may cause distortion in
	the image.

#### Orientation

To rotate the video for the selected song, select the box, click the 🔀 button, and choose a setting from the menu.



Click the **Rotate Clockwise** and **Rotate Counterclockwise** for buttons in the Compilation window.

## **Color Sets**

You can choose color sets to choose which colors are used to adjust which color set is used to draw subtitle text. You can have four project-wide color sets that are available to every title in your project, and each title in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/background color, antialias color, and transparent color. For more information, see Using color sets on page 54.

# **Chapter 6** Creating a Picture Compilation

You can use DVD Architect™ software to create a picture compilation DVD or add a picture compilation to a menu in a menu-based project.

**Note:** Your compilation is limited to 99 chapter markers. Chapter markers allow users to navigate through your pictures and are automatically inserted for the first 99 pictures. These markers always occur at the beginning of the picture, and cannot be deleted or renamed. Users can allow the compilation to play normally, or they can navigate forward and backward through the first 99 pictures in your compilation. If you have more than 99 pictures in your compilation, users will need to use the Fast Forward button on the remote control to navigate past slide 99.

If you're creating a picture compilation DVD, you already know how to start a project and locate your media (see Getting Started on page 23).

Tip: If you want the file name of your images to be automatically inserted on a slide, make sure the Auto-Insert Slide **Text** option is enabled on the **Options** menu before you add pictures to your compilation. If you do not want any text to appear on your slides, make sure this option is disabled before you add pictures to your compilation. If this option is enabled or disabled after you have started adding pictures, it only applies to the pictures added from that point.

## Adding a picture compilation to a menu

If you want to add a picture compilation to a menu in an existing menu-based project, the process is easy.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu from which you want to link to the picture compilation.
- From the Insert menu, choose Picture Compilation. A button is added to the menu as a link to the compilation.



Compilation button 🛅

Double-click the compilation's button to begin assembling your compilation.

## Adding and editing images

## Inserting images

on page 87.

There are several ways to add images to your compilation:

- Use the Explorer window to locate and select image files and drag them to the Compilation window. You can select multiple files at once using the Shift key for consecutive files or the Ctrl key for nonconsecutive files. Files are added to the compilation list wherever you drag
- Use the Explorer window to locate image files. Doubleclick on a file to add it to the bottom of the list in the Slideshow Properties area.
- From the **Insert** menu, choose **Slide**. The Insert Slide dialog is displayed. Select a file and click the **Open** button. The image is inserted above the currently selected slide in the list.

From the Insert menu, choose Empty Slide. An empty slide is inserted above the currently selected slide in the list.

**Note:** If you want the image file name automatically inserted on each slide, choose **Auto-Insert Slide Text** from the Options menu. Otherwise, you can manually add the text to each slide. For more information, see Adding and editing text



## Replacing an image

There are several ways to replace a slide image:

- Select a slide in the Compilation window. From the Edit menu, choose Slide Image and then choose Set. The Set Image
  dialog is displayed. Select a new image and click the Open button. The image is replaced with your new selection.
- Right-click a slide in the list and choose **Set Image** from the shortcut menu. The Set Image dialog is displayed. Select a new image and click the **Open** button. The image is replaced with your new selection.
- Drag a file from the Explorer window onto an existing slide in the compilation. The image is replaced with the dragged file
- On the Picture Compilation Properties pane, click the Slide button. Click Image, click the button, and choose
  Replace from the menu. The Open Media dialog is displayed. Select a new image and click the Open button. The image
  is replaced with your new selection.

## Generating slideshow animation

If you want to spice up a picture compilation, you can add animation to your static images. For example, you could pan across an image or zoom in to simulate camera motion.

**Important:** Generated animation is created by creating a crop keyframe at the beginning and end of each picture. Any cropping applied via the Crop and Adjust dialog will be overwritten when you generate slideshow animation. For more information, see Crop and video effects keyframes on page 58.

- 1. Double-click a picture compilation in the Project Overview window (or navigate in the workspace) to open the picture compilation you want to edit. For more information, see Project Overview window (Ctrl+Alt+1) on page 14.
- 2. In the Compilation window, select the pictures you want to animate, or press Ctrl+A to generate animation for all pictures. For more information, see Compilation window (Alt+7) on page 19.

**Tip:** Select a single image when you want to be able to control the specific type of animation that is used for that image. For example, what if you wanted to use pan or zoom animation throughout a picture compilation but wanted to be sure to use panning on a wide landscape image?

Press Ctrl+A to select all images in the compilation. You can then use the Generate Slideshow Animation dialog to set up pan or zoom animation throughout the compilation.

Next, click the landscape image to select it (and remove the other images from the selection). You can now use the Generate Slideshow Animation dialog to set up panning animation for that image.

- 3. Click the Generate Slideshow Animation button in the Compilation window. The Generate Slideshow Animation dialog is displayed.
- **4.** Select the **Animation** box, click the button, and choose the type of animation you want to create:

Setting	Description
Pan only	Crops the image and moves the crop rectangle across the picture to create the appearance of your still images moving across the screen.
	You can choose the direction and speed of the motion.
Zoom only	Crops the image and changes the size of the crop rectangle over time to zoom in or out.
	You can choose whether you want to zoom in, out, or both, and set the maximum zoom level.
Pan or zoom	Panning or zooming is applied to each picture.
Pan and zoom	Panning and zooming are applied to each picture

5. If you want to crop the image before applying animation, select the **Edge crop** box, click the w button, and drag the slider to set the percentage you want to offset the crop rectangle from the original image size.

6. If you selected Pan only, Pan or zoom, or Pan and zoom in step 4, use the Panning controls to fine-tune the pan animation that will be applied to your images.

Control	Description
Direction	Select the box, click the w button, and choose a setting from the menu to set the direction for panning.
Speed	Select the box, click the 😺 button, and drag the slider to set the panning speed.

7. If you selected Zoom only, Pan or zoom, or Pan and zoom in step 4, use the Zooming controls to fine-tune the zoom animation that will be applied to your images.

Control	Description	
Direction	Select the box, click the w button, and choose a setting from the menu to choose whether you want to zoom in, out, or alternate between images.	
Maximum zoom	Select the box, click the volume button, and drag the slider to set the maximum zoom level.	
	If you use the ${\bf Edge\ crop}$ control to crop the image, the maximum zoom is based on the edge-cropped image.	

- 8. If you want the cropped images to match the aspect ratio of your DVD Architect project, select the Match output aspect box, click the 👽 button, and choose Yes from the menu. Forcing the crop rectangle to match the project aspect ratio prevents the likelihood of seeing black borders around your pictures.
- 9. Click OK to close the dialog and generate the animation. A Crop and Adjust keyframe is created at the beginning and end of each slide to create animation.
- **10.** Click the **Preview** button \( \bigsize \) to preview your settings.
- 11. If you need to change your settings, you can use either of the following procedures:
  - Click the **Generate Slideshow Animation** button  $\frac{1}{3}$  in the Compilation window and use the Generate Slideshow Animation dialog.
  - For even more control, use the keyframe controller in the Crop and Adjust dialog to adjust individual keyframes for each picture. With this method, you can control the exact position of the crop rectangle for precise control over the pan or zoom animation. For more information, see Crop and video effects keyframes on page 58.

## Setting image stretching or scaling

You can use the tools at the top of the Compilation window to rotate an image or set the stretch type that will be used to scale the image.

- 1. Select an image in the Compilation window.
- 2. On the Picture Compilation Properties pane, click the Slide button.
- **3.** Click **Stretch type**, click the button and choose one of the following stretch types:
  - Letterbox the image is displayed without scaling, and black letterboxing bars are added above and below or on the sides as needed.
  - **Zoom to fit** the image is magnified to fill the screen.
  - Stretch to fit the image is stretched to fill the screen. This may cause distortion in the image.

## Rotating an image

- 1. Double-click a picture compilation in the Project Overview window (or navigate in the workspace) to open the picture compilation that you want to edit.
- 2. Select an image in the Compilation window.
- 3. Click the Rotate counterclockwise or Rotate clockwise button.

## Adjusting brightness and contrast or editing the image

- 1. Double-click a picture compilation in the Project Overview window (or navigate in the workspace) to open the picture compilation that you want to edit.
- 2. Select an image in the Compilation window.
- **3.** Use the buttons at the top of the Compilation window to adjust the appearance. For more information, see Compilation window (Alt+7) on page 19.

-or-

On the Picture Compilation Properties pane, click the **Slide** button. Select **Video**, click the **w** button and choose **Crop and Adjust** (to display the Crop and Adjust dialog) or **Open in Graphics Editor** (to edit the image in an external image editor). For more information, see Cropping and adjusting video and graphics on page 55.

#### Setting display duration from the Picture Compilation Properties window

You can adjust the duration of a slide from the Picture Compilation Properties window.

- 1. Double-click a picture compilation in the Project Overview window (or navigate in the workspace) to open the picture compilation that you want to edit.
- 2. Select an image (or multiple images) in the Compilation window.
- 3. On the Picture Compilation Properties pane, click the Slide button.
- 4. Click Length and type the length of time you want each slide to display or click the 🔻 button and drag the slider.

**Note:** If you've added background audio and you want the length of your slideshow to match the length of your background audio, click the **Fit compilation to audio** button. Based on the length of your audio, the length of time each slide is displayed is automatically adjusted.

## Setting display duration from the timeline

Another way to set the duration of slides is through the adjustment of markers on the timeline. This is especially helpful if you want to precisely match your pictures to audio.

- 1. Double-click a picture compilation in the Project Overview window (or navigate in the workspace) to open the picture compilation you want to edit.
- 2. In the Timeline window, drag the marker tab 🖊 to a new position.

**Note:** A marker is automatically inserted at the beginning of each slide.

## Inserting an empty slide

You can insert an empty slide anywhere in your project by choosing the **Empty Slide** option from the **Insert** menu. The empty slide is inserted above the currently selected slide in the Compilation window. Once you have inserted an empty slide, you can add text and/or graphics to it.

## Adding and editing text

## Adding text

You can add text to each slide of your compilation.

**Note:** If you want the image file name automatically inserted on each slide, choose **Auto-Insert Slide Text** from the **Options** menu.

- 1. In the Compilation window, select the slide to which you want to add text.
- 2. From the Insert menu, choose Text. A text box is added in the workspace.
- 3. Type your text in the text box.

## Formatting text

- **1.** Select the image containing the text you want to format.
- 2. If necessary, click the Selection tool \( \infty \) or sizing tool \( \precedit \) in the editing toolbar to make it the active tool.
- 3. In the workspace, click the text box and use the text bar to edit your text properties:
  - Choose a font from the drop-down list to set the typeface for your text.
  - Choose a font size from the drop-down list. Choose Auto to have the text automatically adjust to fit the size of the text box.
  - Click the **Bold B**, **Italic 1**, or **Shadow S** buttons to toggle your font effects as desired.
  - Set your text justification options as desired. For more information, see Text toolbar (Alt+2) on page 16.
  - Click the down arrow next to the color swatch button to display the color picker, where you can set the red, green, blue, and alpha channels for your text.

## Moving text

- 1. Select the image containing the text you want to move.
- 2. If necessary, click the selection tool \(\ni\) in the editing toolbar to make it the active tool.
- 3. In the workspace, drag the text box to the desired location, or click **Transformations** in the Properties window to type a new location for the text box in the **X position** and **Y position** boxes.

**Tip:** You can also use transformation keyframes to animate text in your project. For more information, see *Transformation keyframes on page 62*.

## **Deleting text**

- 1. Select the image containing the text you want to delete.
- 2. If necessary, click the selection tool \(\ni\) in the editing toolbar to make it the active tool.
- 3. In the workspace, select the text box you want to delete.
- 4. From the Edit menu, choose Delete.

## Inserting a graphic

You can insert any number of graphics to display on top of a selected slideshow image.

- 1. In the Compilation window, select the slide to which you want to add the graphic.
- 2. From the Insert menu, choose Graphic. The Insert Graphic dialog is displayed.
- **3.** Locate and select the file you want to use.
- 4. Click the OK button.

- **5.** To reposition the graphic, click the Selection tool on the editing toolbar and drag the graphic to the desired location, or click the **Transformations** button on the Graphics Properties pane to type a new location for the graphic box in the **X position** and **Y position** boxes.

**Tip:** You can also use transformation keyframes to animate graphics in your project. For more information, see *Transformation keyframes on page 62*.

## Inserting audio

You can select an audio file to play in the background while your compilation is being viewed.

- 1. Drag an audio file to the workspace or to an audio track in the Timeline window.
- 2. Click the **Fit compilation to audio** button to automatically adjust the duration of all slides to match the length of the audio file. *For more information, see Audio tracks on page 107*.

## Setting thumbnail display

You can set the size of the thumbnail displayed for the slides in the Compilation window. Click the button to the right of the **Thumbnail Size** button and choose **Small**, **Medium**, or **Large** to select the desired size.

## Picture compilation properties


The Picture Compilation Properties pane in the Properties window allows you to adjust the end actions and remote control button behavior for the selected picture compilation.

To edit the picture compilation's properties, perform the following steps:

- Double-click a picture compilation in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. Click the property button that you would like to edit.

#### General

Choose a setting from **Reduce interlace flicker** the drop-down list to turn flicker reduction on or off. Turn flicker reduction on when using still images that contain thin horizontal lines.



If you have already created at least one DVD script in your project, select the **Start Script** box, click the vbutton, and choose the script that will be played when the music/video compilation is accessed.

**Note:** None is the default setting.

## **Track Media**

The **Audio** control displays the path to the background audio file that will be used.

**Note:** If a picture compilation has multiple audio tracks, there will be a separate **Audio** control for each track.

Select a command from the menu to replace a file, view media properties, or remove the current file.

**Tip:** You can also change the audio by dragging a new audio file from the Explorer window to the **Audio** box or to a slide in the Compilation window.

#### **End Action**

Item	Description
Command	Determines what happens after the last slide is displayed.
	<b>Link</b> - you can link to any menu, media file, and chapter point. Use the <b>Destination</b> , <b>Destination chapter</b> , <b>Destination item</b> , or <b>Destination button</b> controls to set the target. You can also use the <b>Destination button</b> control to choose the default selected button in the destination menu.
	<b>Stop</b> - your DVD will stop playing after the last song.
Destination	When <b>Link</b> is selected in the <b>Command</b> drop-down list, choose the menu or media file that will be displayed.
	Note: If no menu has been displayed, Most recent menu will display the first menu on the disc.
Destination chapter	When your end action links to a video, music compilation, picture compilation, or playlist, choose the specific chapter in the destination file that will be displayed.
Destination item	When your end action links to a menu, choose <b>Start</b> or <b>Loop Point</b> to indicate the point from which the menu will be played. For more information about setting a menu loop point, see the General heading in the Menu Page Properties topic.
Destination button	When your end action links to a menu, you can choose the button you want to use as the default selected button in the destination menu.
	If you choose <b>Default</b> , the first button listed under the menu in the Project Overview window is used as the default.
Set audio track	Choose a setting from the drop-down list to choose which audio track will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set audio track</b> control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set subtitle track	Choose a setting from the drop-down list to choose which subtitle track will be played in a destination title. Choose <b>Off</b> to turn subtitles off, or choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set subtitle track</b> control to change the subtitle track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set video angle	Choose a setting from the drop-down list to choose which video angle will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set video angle</b> control to change the video angle, the new angle will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the angle.

#### **Remote Buttons**

For each picture compilation, you can allow or suspend operation of individual buttons on the DVD player's remote control. Turning buttons on or off helps to ensure the viewer will see your DVD as you intended it.

If you have an animated menu, for example, turning off buttons will prevent the user from navigating away from the menu before it's finished playing.

To turn each button on or off, choose **On** or **Off** from the menu.

## **Note:** When **Off** is selected from the menu, the button is not available.

Item	Description
Title play	Allows the user to press the Title button on the remote to skip to a specific video or music/picture
	compilation.
Stop	Allows the user to press the Stop button on the remote to stop the DVD.
Time/chapter search	Allows the user to press the Time button on the remote to skip to a specific play time or chapter.
Previous/up	Allows the user to press the Previous/Up button on the remote to navigate to the previous
	chapter or menu page.
Next	Allows the user to press the Next button on the remote to navigate to the next chapter or menu
	page.
Fast scan	Allows the user to press the Fwd button on the remote to seek forward through a video, music
	compilation, or picture compilation.
Backward scan	Allows the user to press the Rev button on the remote to seek backward through a video, music
	compilation, or picture compilation.
Top menu	Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.
Menu	Allows the user to press the Menu button on the remote during playback.
	Click the + button to expand the <b>Menu</b> controls so you can define the behavior of the Menu
	button for media files, picture compilations, and music compilations. For more information, see
	End Action on page 89.
Resume	Allows the user to press the Resume (Menu) button on the remote to resume playback of a title
nesume	after exiting it by pressing the Menu button.
Button navigation	Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between
zation navigation	menu buttons.
Pause	Allows the user to press the Pause button on the remote to temporarily suspend playback.
Audio track change	Allows the user to press the Audio button on the remote to choose which audio track is played.
	<b>Note</b> : Choose <b>No Change</b> to use the last-set track.
Subtitle track	Allows the user to press the Subtitle button on the remote to choose which subtitle track is
change	displayed.
	Note: Choose No Change to use the last-set track.
Video angle change	Allows the user to press the Angle button on the remote to choose which video track is played.
Video mode	Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed,
	and pan-and-scan presentation in a 16:9 video.

#### Slide

#### Slide Media

The Image control displays the path to the image that will be displayed for the selected slide.

Select **Image** and then click the button to replace a file, view media properties, crop and adjust media settings, or remove the current file. For more information, see Displaying the Crop and Adjust window on page 55.

## Stretch type

Choose an option from the drop-down list to determine how the image will be scaled.

Item	Description
Letterbox	The image is displayed without scaling, and black letterboxing bars are added above and below or on the sides as needed.
Zoom to fit	The image is magnified to fill the screen.
Stretch to fit	The image is stretched to fill the screen. This may cause distortion in the image.

#### Length

Change the duration of the selected slide by clicking the 🔳 button, and dragging the slider or typing a value in the edit box.

#### Orientation

Choose an option from the drop-down list to rotate the slide image.



Click the **Rotate Clockwise** button and **Rotate Counterclockwise** buttons in the Compilation

#### **Color Sets**

You can choose color sets to choose which colors are used to adjust which color set is used to draw subtitle text during the picture compilation. You can have four project-wide color sets that are available to every title in your project, and each title in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/background color, anti-alias color, and transparent color. For more information, see Using color sets on page 54.

## **Chapter 7** Creating Playlists


A playlist contains a user-defined sequence of movies, chapter markers, music/video compilations, or picture compilations. A playlist can contain only titles that are part of the DVD project, which are played from start to finish, and an end action determines what happens at the end of the playlist. Playlists do not increase the size of your DVD.

**Note:** DVD Architect™ software only allows up to 255 playlists, each containing no more than 255 items.

Tip: If you want to create a series of videos that play sequentially, you can create a music/video compilation made up of video files. This sort of video compilation behaves much like a playlist, but it will be written to your DVD as a single video title set. If you have a project with many short videos, this loophole in the 99-title-set limitation imposed by the DVD specification can save you from rerendering and combining media.

## Adding a playlist to a menu

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to
- From the Insert menu, choose Playlist. The Select Titles dialog is displayed.




- 3. In the Select Titles dialog, choose the titles that you want to include in your playlist, and then click button is added to the current menu as a link to the playlist.
- 4. To control which starting chapter, audio track, and subtitle track are played when each title is played, use the Playlist Properties pane. For more information, see Playlist properties on page 94.

#### Adding a playlist without a link

You have the ability to add a playlist to your project without adding a menu link. You can use this method to build your playlist, and then you can add buttons to your project when you are ready to link to the playlist.

1. Perform one of the following actions:



- 2. In the Select Titles dialog, choose the titles that you want to include in your playlist, and then click [
- 3. To control which starting chapter, audio track, and subtitle track are played when each title is played, use the Playlist Properties. For more information, see Playlist properties on page 94.

## Adding titles to a playlist

- 1. Double-click a playlist in the Project Overview window (or choose a playlist from the drop-down list at the top of the Playlists window) to open the playlist you want to edit.
- 2. Add titles to your playlist by completing the following steps:
  - a. Click the Insert Playlist Items button 🐈 in the Playlists window toolbar to display the Select Titles dialog.
  - **b.** Choose the titles that you want to include in your playlist.
  - c. Click OK ... The titles are added to the end of your playlist.



You can also drag titles from the Project Overview window to the Playlists window.

**3.**To control which chapter, audio track, and subtitle track are played when each title is played, use the Playlist Properties. For more information, see Playlist properties on page 94.

## Deleting titles from a playlist

- 1. In the Playlists window, select the titles that you want to delete.
- 2. From the Edit menu, choose Delete. The items are deleted from the playlist.

## Rearranging titles in a playlist

You can quickly rearrange the titles in the Playlists window by selecting the title that you would like to move, dragging it and then dropping it to another position in the Playlists window.

## Renaming a playlist

- 1. Right-click a playlist in the Project Overview window and choose Rename from the shortcut menu.
- 2. Type a new name in the edit box.
- 3. Press Enter.

## Playlist properties

The Playlist Properties pane in the Properties window allows you to adjust settings for each item in a playlist, specify the playback order, or to set the end action for the selected playlist.

To edit the playlist's properties, perform the following steps:

- 1. Double-click a playlist in the Project Overview window (or navigate in the workspace) to open the playlist you want to edit or choose a playlist from the drop-down list at the top of the Playlists window.
- 2. Select the playlist item that you would like to edit.
- 3. Click the General, End Action, or Playlist Item button.
- **4.** Select the specific control, click the button, and choose a setting from the drop-down list.



## General

ltem	Description
Play mode	Determines the order of play for items in your playlist:
	• Sequential: Plays the items in the order you selected in your playlist.
	• Random: Plays the items in your playlist in a random order.
Infinite	If you selected random playback, the <b>Infinite</b> control determines the number of items to play from your playlist
	<ul> <li>Yes: Playback includes all items in your playlist, and continues until the DVD user makes another selection.</li> </ul>
	<ul> <li>No: Playback includes only the number of items you specify in the Count box, which DVD Architect randomly selects from your playlist. Once playback of the specified number of items is complete, the DVD returns to the destination specified in the End Action properties.</li> </ul>

## **End Action**

Item	Description
Command	Determines what happens after the last item in the playlist is played.
	<ul> <li>Link: you can link to any menu, media file, and chapter point. Use the Destination, Destination chapter, Destination item, or Destination button controls to set the target. You can also use the Destination button control to choose the default selected button in the destination menu.</li> </ul>
	Stop: your DVD will stop playing after the last item.
Destination	When Link is selected in the <b>Command</b> drop-down list, choose the menu, title, or playlist that will be displayed.
	Note: If no menu has been displayed, Most recent menu will display the first menu on the disc.
Destination chapter	When your end action links to a video, music compilation, picture compilation, or playlist, choose the specific chapter in the destination file that will be displayed.
Destination item	When your end action links to a menu, choose <b>Start</b> or <b>Loop Point</b> to indicate the point from which the menu will be played.
Destination button	When your end action links to a menu, you can choose the button you want to use as the default selected button in the destination menu.
	If you choose <b>Default</b> , the first button listed under the menu in the Project Overview window is used as the default.
Set audio track	Choose a setting from the drop-down list to choose which audio track will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set audio track</b> control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set subtitle track	Choose a setting from the drop-down list to choose which subtitle track will be played in a destination title. Choose <b>Off</b> to turn subtitles off, or choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set subtitle track</b> control to change the subtitle track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set video angle	Choose a setting from the drop-down list to choose which video angle will be played in a destination title. Choose No change to use the last-set track.
	<b>Note</b> : If you use the <b>Set video angle</b> control to change the video angle, the new angle will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the angle.

## **Playlist Item**

ltem	Description
Start chapter	Choose a chapter from the drop-down list to choose where playback will begin when this item is played in the selected playlist.
Set audio track	Choose a setting from the drop-down list to choose which audio track will be played when this item is played in the selected playlist. Choose <b>No change</b> to use the last-set track.
Set subtitle track	Choose a setting from the drop-down list to choose which subtitle track will be played when this item is played in the selected playlist. Choose <b>No change</b> to use the last-set track.
Set video angle	Choose a setting from the drop-down list to choose which video angle will be played when this item is played in the selected playlist. Choose <b>No change</b> to use the last-set angle.

## **Chapter 8** Creating a Single-Movie DVD or Title

You can use DVD Architect™ software to create a single-movie DVD or add a single-movie title to a menu in a menu-based project.

If you're creating a single-movie project, you already know how to start a project and locate your media (see Getting Started on page 23).

## Adding a movie title to a menu

If you want to add a single-movie title to a menu in an existing menu-based project, the process is easy.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu from which you want to link to the movie.
- 2. From the Insert menu, choose Media, The Insert Media dialog is displayed.



Click the Insert Object 🚭 button in the Project Overview window, and then click the Insert Media button 🟪.

- **3.** Locate and select the file you want to use.
- 4. Click the OK button. A button is added on the menu as a link to the video.
- 5. Double-click the movie's button in the workspace to open the video file.

After you've chosen your media file, you can use the Timeline window to set in and out points and add chapter markers.

## Setting in and out points

You can set in and out points if you don't want to burn your entire video file to DVD. When preparing your DVD, the software will trim the video to include only the portion between these points.

- 1. Double-click a title in the Project Overview window (or navigate in the workspace) to open the video.
- 2. In the Timeline window, click to position the cursor where you want the video to begin.
- 3. Click the **Set In Point** button \_\_\_\_. A yellow triangle is placed on the timeline to mark the in point. Chapter 1 represents the point at which playback will begin. When you change the in point, the first chapter marker will be updated to match the in point.



- 4. Click to position the cursor on the timeline where you want the video to end.
- 5. Click the Set Out Point button . A yellow triangle is placed on the timeline to mark the out point.

## Working with markers

You can insert scene/chapter markers, chapter markers and buttons-on-video markers in video files. You can also rename, move, delete, load and save markers.

#### Notes:

- · Markers must be at least one second apart.
- There is a limit of 99 chapters and 255 markers in a project.
- In a music/video compilation, markers always occur at the beginning of the compilation and cannot be moved or deleted.

## Inserting scene/chapter markers

Scene/chapter markers are used when you add scene selection menus to your projects. For more information, see Inserting a scene selection menu on page 50.

Using the Timeline window, you can place scene/chapter markers in your video file for viewers to use as navigation points. The scene/chapter markers allow you to move to certain portions of the video and begin playback. You can also use scene/chapter markers to automatically create scene selection menus and link to scene/chapter markers with end actions.

- 1. Double-click a title in the Project Overview window (or navigate in the workspace) to open the video.
- 2. In the Timeline window, click to position the cursor where you want to place the marker.
- 3. Click the down arrow next to the Insert Scene/Chapter Marker button 💝 and choose Insert Scene/Chapter Marker.


#### Inserting chapter markers

Chapter markers are used to denote different sections of your project. You can place chapter markers in your video file for viewers to use as navigation points to skip through the project. You can also use chapter markers to manually create scene selection menus and link to chapter markers with end actions. For more information, see Inserting a scene selection menu on page 50.

- 1. Double-click a title in the Project Overview window (or navigate in the workspace) to open the video.
- 2. In the Timeline window, click to position the cursor where you want to place the marker.
- 3. Click the down arrow next to the Insert Chapter Marker button T and choose Insert Chapter Marker.

## Inserting buttons-on-video markers

When you add buttons to a video, the button regions in the timeline must be placed between two markers. Unlike scene/chapter markers and chapter markers, buttons-on-video markers are ignored by the remote control's previous/next chapter buttons. When you add a button to a video a button region is created in the Timeline window. Buttons-on-video markers can be moved so you can easily adjust the length of your button regions. For more information, see Adding buttons to videos on page 102.



- 1. Double-click a title in the Project Overview window (or navigate in the workspace) to open the video.
- 2. In the Timeline window, click to position the cursor where you want to place the marker.
- 3. Click the down arrow next to the Insert Buttons on Video Marker button and choose Insert Buttons on Video Marker. You can drag the edge of the button region to align with buttons-on-video markers.

#### **Snapping markers to I-frames**

For DVD-compliant video files, markers must occur at I-frames. If a marker does not occur at an I-frame, the 🥬 tag will appear. To snap the marker to the I-frame, drag the marker along the timeline to one of the I-frame reference points v. When the marker has snapped to the I-frame, the 🥊 tag will clear from the marker. For more information, see Moving markers on page 99.

Note: If a marker is not an I-frame, you can recompress the video title to add an I-frame at that location on the timeline. However, if you don't manually recompress the title, DVD Architect will automatically move the marker to an I-frame. For more information, see Optimizing your project on page 34.



#### Renaming markers


- 1. Right-click the scene/chapter marker, chapter marker, or buttons-on-video marker on the timeline and choose Rename Marker from the shortcut menu.
- 2. Type a new name in the edit box.
- 3. Press Enter.

#### Moving markers

To change the position of a scene/chapter marker, chapter marker, or buttons-on-video marker, drag the marker on the timeline to the new location.

#### **Deleting markers**

To delete a marker on the timeline, right-click the marker and choose Delete Marker from the shortcut menu. You can also right-click timeline's marker bar and choose Delete All Markers from the shortcut menu to clear all markers.

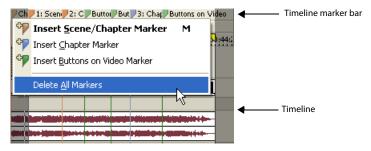

**Note:** DVD Architect automatically inserts an initial scene/chapter marker in all video files. You cannot delete this marker.

## Loading markers

Click the Load Markers button 🙇 to clear existing markers and reload any marker changes you made in the file with a video editor such as Sony Vegas® software.

#### Saving markers

Use the **Save Markers** button **!** to save all markers to your media file. If you do not save your markers, the marker information is saved only in the project file.

**Note:** DVD Architect saves the marker location but not the marker type.

## **Media properties**

The Media Properties pane in the Properties window adjusts the end actions and remote control button behavior for the selected media file.

To edit media properties, perform the following steps:

- If the window isn't already visible, choose Properties from the View menu.
- 2. Double-click a media file in the Project Overview window (or navigate in the workspace) to open the media you want to edit.
- 3. Click a button at the top of the Properties window.



Select the **Reduce interlace flicker** box, click the button, and choose a setting from the drop-down list to turn flicker reduction on or off. Turn flicker reduction on when using still images that contain thin horizontal lines.

If you have already created at least one DVD script in your project, select the **Start Script** box, click the will be played when the media file is accessed.

## **Track Media**

You can easily change the video or audio files used for a movie or movie object by using the **Track Media** controls in the Media Properties pane of the Properties window.

## Video

The Video control displays the path to the video file that will be used for the title.

Select **Video** and then click the button to replace a file, view media properties, crop and adjust media settings, or remove the current file. For more information, see Displaying the Crop and Adjust window on page 55.

**Tip:** To change a file quickly, drag a file from the Explorer window to the **Video** box.



#### Audio

The Audio control displays the path to the background audio file that will be used.

**Note:** If a picture compilation has multiple audio tracks, there will be a separate **Audio** control for each track.

Select Audio and then click the 🗾 button to replace a file, view media properties, remove the current file, generate music, or explore the containing folder. For more information, see Generating music with Cinescore on page 116.

**Tip:** You can also change the audio by dragging a new audio file from the Explorer window to the Audio box or to a slide in the Compilation window.

#### **End Action**

A media file's end action determines what happens after the media file ends.

Item	Description
Command	Determines what happens after the last track plays.
	<ul> <li>Link: you can link to any menu, media file, and chapter point. Use the Destination, Destination chapter, Destination item, or Destination button controls to set the target. You can also use the Destination button control to choose the default selected button in the destination menu.</li> </ul>
	Stop: your DVD will stop playing after the last song.
Destination	When <b>Link</b> is selected in the <b>Command</b> drop-down list, choose the menu or media file that will be
	displayed.
	Note: If no menu has been displayed, Most recent menu will display the first menu on the disc.
Destination chapter or	When your end action links to a video, music/video compilation, or picture compilation, choose the specific chapter in the destination file that will be displayed.
Destination item	When your end action links to a menu, choose <b>Start</b> or <b>Loop Point</b> to indicate the point from which the menu will be played.
Destination button	When your end action links to a menu, you can choose the button you want to use as the default selected button in the destination menu.
	If you choose <b>Default</b> , the first button listed under the menu in the Project Overview window is used as the default.
Set audio track	Choose a setting from the drop-down list to choose which audio track will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set audio track</b> control to change the audio track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set subtitle track	Choose a setting from the drop-down list to choose which subtitle track will be played in a destination title. Choose <b>Off</b> to turn subtitles off, or choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set subtitle track</b> control to change the subtitle track, the new track will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the track.
Set video angle	Choose a setting from the drop-down list to choose which video angle will be played in a destination title. Choose <b>No change</b> to use the last-set track.
	<b>Note</b> : If you use the <b>Set video angle</b> control to change the video angle, the new angle will be used when you navigate between titles unless another button action, end action, or user action (via the remote control) changes the angle.

#### **Remote Buttons**

For each media file, you can allow or suspend operation of individual buttons on the DVD player's remote control. Turning buttons on or off helps to ensure the viewer will see your DVD as you intended it.

If you have an animated menu, for example, turning off buttons will prevent the user from navigating away from the menu before it's finished playing. To turn each button on or off, choose **On** or **Off** from the menu.

**Note:** When **Off** is selected from the menu, the button is not available.

ltem	Description	
Title play	Allows the user to press the Title button on the remote to skip to a specific video or music/video compilation.	
Stop	Allows the user to press the Stop button on the remote to stop the DVD.	
Time/chapter search	Allows the user to press the Time button on the remote to skip to a specific play time or chapter.	
Previous/up	Allows the user to press the Previous/Up button on the remote to navigate to the previous chapter or menu page.	
Next	Allows the user to press the Next button on the remote to navigate to the next chapter or menu page.	
Fast scan	Allows the user to press the Fwd button on the remote to seek forward through a video, music/video compilation, or picture compilation.	
Backward scan	Allows the user to press the Rev button on the remote to seek backward through a video, music/video compilation, or picture compilation.	
Top menu	Allows the user to press the Menu button on the remote to navigate to the top menu of the DVD.	
Menu	Allows the user to press the Menu button on the remote during playback.	
	Click the 🛨 button to expand the <b>Menu</b> controls so you can define the behavior of the Menu button for media files, picture compilations, and music/video compilations. For more information, see End Action on page 79.	
Resume	Allows the user to press the Resume (Menu) button on the remote to resume playback of a title after exiting it by pressing the Menu button.	
Button navigation	Allows the user to press the Up/Down/Left/Right buttons on the remote to navigate between menu buttons.	
Pause	Allows the user to press the Pause button on the remote to temporarily suspend playback.	
Audio track change	Allows the user to press the Audio button on the remote to choose which audio track is played.	
	<b>Note</b> : Choose <b>No Change</b> to use the last-set track.	
Subtitle track change	Allows the user to press the Subtitle button on the remote to choose which subtitle track is displayed.	
	<b>Note</b> : Choose <b>No Change</b> to use the last-set track.	
Video angle change	Allows the user to press the Angle button on the remote to choose which video track is played.	
Video mode	Allows the user to press the Video Mode button on the remote to switch widescreen, letterboxed, and pan-and-scan presentation in a 16:9 video.	

## Color sets

You can have four project-wide color sets that are available to every title in your project, and each title in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/background color, anti-alias color, and transparent color. For more information, see Using color sets on page 54.

## Adding buttons to videos

You can add buttons to a video title to make your DVDs more interactive. For example, add a button to a video title to take the viewer to a DVD's outtakes or special features like those found on commercial DVDs.

**Tip:** You can also add buttons to picture and music/video compilations. To add a picture compilation to your project, see Adding a picture compilation to a menu on page 83. To add a music compilation to your project, see Adding a music/video compilation to a menu on page 75.

- 1. Double-click a video title in the Project Overview window (or navigate in the workspace) to open it.
- 2. In the Timeline window, click to position the cursor where you want to add the button to your project.
- 3. Add a button using any of the following methods:
  - From the **Insert** menu, choose **Empty Button** 🗀.
  - From the Timeline window, click **Insert Button ?**
  - From the **Buttons** window, double-click a button to insert it into the workspace.
  - From the **Buttons** window, click a button and drag it into the workspace.
  - From the **Buttons** window toolbar, click **Insert Button** .



- **4.** You can use the Button Properties controls in the Properties window to edit the button image used and the button action. *For more information, see Button properties on page 67*.
- 5. When you add a button to a video, a button region is created in the Timeline window. This button region indicates how long the button will be visible in your project. You can insert buttons-on-video markers in the Timeline window so you can easily adjust the length of your button regions. For more information, see Inserting buttons-on-video markers on page 98.

**Note:** *Deleting all buttons in a button region will eliminate the entire button region.* 

To add another button to a video, repeat steps 2-5, as needed. When you have multiple buttons in your video, you can edit the button order.

#### Editing button order for a video

From the Edit menu, choose **Button Order** to display the Button Order dialog, where you can set the order for buttons on the video title.

The #1 button is the default selected button when you navigate to a menu or video title unless you've used the **Destination Button** control on the Action or End Action page of the Properties window to specify a different destination button. For information about editing buttons for menus, see Editing button order for a menu on page 65.

When you use buttons on video, the button order determines which button is selected by default and when playback moves across button regions.

For example, imagine you have three buttons each in three button regions:

Button Region 1	
Button 1	Director's Interview: The making of this scene
Button 2	Cast Interview: The making of this scene
Button 3	Main Menu

Button Region 2	
Button 1	Cast Interview: The making of this scene
Button 2	Director's Interview: The making of this scene
Button 3	Main Menu

When the audience plays your DVD, the same button number will be selected when playback passes from one button region to the next.

Notice that button 1 and button 2 are reversed in the two button regions. If button 2 is selected, the button highlight will switch from "Cast Interview: The making of this scene" to "Director's Interview: The making of this scene" when playback switches from button region 1 to button region 2.

Use the Button Order dialog to make sure your button order is consistent throughout your video.

- 1. Choose the video you want to edit:
  - Double-click a video in the Project Overview window.

—or—

- Click the down arrow in the address bar to select a video.
- 2. In the Timeline window, click to position the cursor in the button region you want to edit.
- 3. From the Edit menu, choose **Button Order**. The Button Order dialog is displayed.

By default, the button order matches the order in which you added buttons to the video. The first button you add is the default button.

- 4. Select a button and click the Move Up or Move Down buttons to change the selected button's order.
- 5. Repeat step 4 as needed.
- **6.** Click **OK** to close the Button Order dialog and save your changes.

#### Animating buttons with keyframes

You can make buttons fade or fly in to a menu by using keyframe animation. For more information, see Crop and video effects keyframes on page 58.

#### Moving a button into position on a menu

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit. For more information, see Project Overview window (Ctrl+Alt+1) on page 14.
- 2. On the General page of the Menu Page Properties pane, verify that the menu length is long enough to accommodate the animation and that the menu loop point is set to the point where you want menu animation to end. For more information, see Editing menu page properties on page 41.
- **3.** In the workspace, select the button you want to animate. The Button Properties pane is displayed in the Properties window. For more information, see Button properties on page 67.
- 4. On the Transformations page in the Button Properties pane, click the Show before loop point box, click the button and choose Yes from the menu so you can animate the button before the loop point.
- **5.** Add keyframes to move the button:
  - **a.** Right-click the Transformations keyframe bar below your video track and choose **Insert** from the shortcut menu. A keyframe is added to the Transformation keyframe bar.
  - **b.** Drag the keyframe to the beginning of the timeline.
  - C. Using the keyframe tool in the workspace, drag the button to the position where you want its motion to begin.

#### **Tip:** You can also use the Transformations page in the Button Properties pane to edit the button position.

- **d.** Double-click the Transformations keyframe bar to create the next keyframe.
- e. Use the keyframe tool to position the button for the next keyframe.
- **f.** Repeat steps d and e as needed to create your button motion.
- **6.** Set the button's final position:
  - a. Position the last keyframe so it matches the menu's loop point marker in the Timeline window.
  - **b.** Use the keyframe tool  $\nearrow$  in the workspace to set the button's final position.

Preview your menu and edit keyframes as needed.

#### Fading a button in to make it appear gradually

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit. For more information, see Project Overview window (Ctrl+Alt+1) on page 14.
- 2. On the General page of the Menu Page Properties pane, verify that the menu length is long enough to accommodate the animation and that the menu loop point is set to the point where you want menu animation to end. For more information, see Editing menu page properties on page 41.
- **3.** In the workspace, select the button you want to animate. The Button Properties pane is displayed in the Properties window. For more information, see Button properties on page 67.
- 4. On the Transformations page in the Button Properties pane, click the Show before loop point box, click the button and choose Yes from the menu so you can animate the button before the loop point.
- **5.** Make the button transparent at the beginning of the menu:
  - **a.** Right-click the button in the workspace and choose **Crop and Adjust** from the shortcut menu. The Crop and Adjust dialog is displayed. For more information, see Displaying the Crop and Adjust window on page 55.
  - **b.** Click to position the cursor at the beginning of the timeline in the keyframe controller.
  - Click the Insert Keyframe button
  - **d.** Click the **Alpha** box in the Crop and Adjust Properties box and click the v button to display a slider.
  - e. Drag the Alpha slider to the left to make the button transparent.

- **6.** Make the button opaque at the menu's loop point:
  - **a.** In the Timeline window, click the menu's loop point marker. The cursor in the Crop and Adjust Keyframe Controller is updated to match this position.
  - **b.** In the Crop and Adjust window, click the **Insert Keyframe** button **①**.
  - c. Click the Alpha box in the Crop and Adjust Properties box and click the v button to display a slider.
  - **d.** Drag the **Alpha** slider to the right to make the button opaque.

During playback, your button is not visible when the menu starts, and it fades in gradually until the menu's loop point, when it is fully opaque.

# **Chapter 9** Adding Audio, Video, and Subtitles

You can add multiple audio, video, and subtitle tracks using DVD Architect™ software. You can also add soundtracks to your projects using the Cinescore™ plug-in from Sony Media Software. This will allow you to add support for multiple languages and multiple viewing angles.

#### **Audio tracks**

You can add multiple audio tracks to videos and picture compilations to add support for multiple languages, audio description, and running commentaries.

When your DVD is played, the DVD player will attempt to determine the appropriate default audio track. If the player cannot determine the correct language, the first track is used. If multiple tracks match the player's language setting — if you have an English dialogue track and an English commentary track, for example — the first track that matches the player's language is used. The viewer can choose which track is played during playback.

## Adding audio tracks

You can add up to eight audio tracks for each title.

- 1. Double-click a title in the Project Overview window (or navigate in the workspace) to open it.
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- Click the Insert Track button 👢 in the Timeline window and select the Insert Audio Track button 🔩 . A blank audio track is added to the timeline. You can add an audio file by dragging it to the track or using the Media Properties pane in the Properties window.
- 4. Click the drop-down arrow next to the Track Language button - and choose a language to identify the track.
- Repeat steps 3 and 4 as necessary to create the audio tracks for your project.

When setting up your project, it's a good practice to use the same track sequence for all videos, picture compilations, and music compilations. If you transition playback between titles, the DVD will continue to play the same track number.

For example, assume the first title on your disc has the following track order:

Now assume the second title on your disc has the following track order:

Track	Language	
1	English	
2	French	
3	Spanish	

Track	Language	
1	French	
2	English	
3	Spanish	

If you're playing English dialogue in the first title, audio track 1 continues playing when you skip to the second title, so you'd hear French dialogue in the second title. Using the same track sequence for all titles will ensure consistency across your project. If necessary, insert blank audio tracks to maintain the track sequence so that the DVD will continue to play the same track number when you transition between titles. However, a user could manually choose a blank audio track without realizing that it was intentionally left blank.

**Note:** Various brands and models of DVD players behave differently with blank audio tracks.

## Replacing audio in a track

You can replace the audio in a track by dragging a new file from the Explorer window or Windows Explorer, or you can edit the controls on the Track Media page on the Media Properties pane of the Properties window. For more information, see Media properties on page 100.

## Setting the audio track for timeline playback

Select the **Activate Track** button  $\P$  in an audio track header in the Timeline window to determine which track is played when you click the **Play from In Point** or **Play** button in the Timeline window.

## Changing audio track colors

- 1. Right-click the header and choose **Track Display Color** from the shortcut menu.
- 2. Choose a color from the submenu to set the selected track's color in the track list and the audio waveform in the timeline.

**Note:** *Track color settings are saved with your project.* 

## Video tracks

You can add multiple video tracks to videos to add support for multiple viewing angles. During playback, the user can press the **Angle** button on the remote control to change angles. Video track number 1 will play the title's main video. Any additional video tracks that you add will play when the **Angle** button on the remote control is pressed.

**Note:** The maximum bitrate for titles with multiple video angles is lower than the maximum for single-angle titles. If the title has 2 to 6 angles, the maximum bitrate it 8 Mbps; if the title has 7 to 9 angles, the maximum is 7.5 Mbps.

**Warning:** Any title that contains multiple video tracks will be recompressed when you prepare your DVD so the main video and the alternate angles can be combined into a new MPEG-2 file. To avoid recompression artifacts (and unnecessary processing time), use AVI files for your multiangle video titles.

## Adding video tracks

You can add up to eight video tracks for each title.

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open it
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. Click the Insert Track button 🕂 and select the Insert Video Track button 🐿 in the Timeline window. A blank video track is added to the timeline.

**Note:** You can add a video file by dragging it to the track or using the Media Properties pane in the Properties window.

## Adding video to tracks

Unlike a standard video track, additional video tracks can contain multiple events from different media files and you can trim the ends of the events.

1. Drag a video from the Explorer window to a track in the Timeline window. A video event is created where you drop the file.



Click the **Insert Video Event** button in the Timeline window and browse to the file that you want to add.

**2.** Drag either end of an event to trim its length as needed.

**3.** Drag the event to position it on the timeline.

**Note:** If the **Auto Ripple** button is selected, video events that occur later in the same track move automatically. When the Auto Ripple button is not selected, only the video event you drag will move; the positions of all existing video events are preserved.

#### Setting the video track for timeline playback

Select the Activate Track button 📮 in the track header in the Timeline window to determine which track is played when you click the **Play from In Point ▶** or **Play ▶** button in the Timeline window.

#### Changing video track colors

- 1. Right-click the header and choose **Track Display Color** from the shortcut menu.
- 2. Choose a color from the submenu to set the selected track's color in the track list and the video waveform in the timeline.

**Note:** Track color settings are saved with your project.

## Video event properties

The Media and Event Properties pane in the Properties window allows you to adjust the color settings and cropping for the events on the additional video tracks.

To edit the video event's properties, perform the following steps:

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to
- 2. Select an alternate video event in the Timeline window.
- 3. Click the **Event Media** property button.

## Video

The Video control displays the path to the video file that will be used.

Select a command from the menu to view media properties or crop and adjust media settings.

## **Subtitles**

Subtitles display on-screen text during videos, picture compilations, and music compilations. Subtitles are intended to be used as various text translations of audio dialogue. By adding multiple subtitle tracks, you can support multiple languages.

When your DVD is played, the DVD player will attempt to determine the appropriate default subtitle track. If the player cannot determine the correct language, the first track is used. If multiple tracks match the player's language setting — if you have an English dialogue track and an English commentary track, for example — the first track that matches the player's language is used. The viewer can choose which subtitle track is displayed during playback.

Each set of subtitles is added as a separate track in the timeline. You can add up to 32 subtitle tracks for each title (16 tracks for widescreen assets).

If you have the full version of DVD Architect software, you can use it to design and create your subtitle text or import subtitles from a text file or third-party subtitling application.

## Adding a subtitle track

- 1. Double-click a title in the Project Overview window (or navigate in the workspace) to open the video.
- 2. From the View menu, choose Timeline to display the Timeline window.
- 3. Click the Insert Track button •• and select the Insert Subtitle Track button in the Timeline window. An empty subtitle track is added to the timeline above the video track.
- 4. Click the drop-down arrow next to the Track Language button • and choose a language to identify the track.
- **5.** Repeat steps 3 and 4 as necessary to create the subtitle tracks for your project.

When setting up your project, it's a good practice to use the same track sequence for all videos, picture compilations, and music compilations. If you transition playback between titles, the DVD will continue to play the same track number.

For example, assume the first title on your disc has the following track order:

Now assume the second title on your disc has the following track order:

Track	Language
1	English
2	French
3	Spanish

Track	Language	
1	French	
2	English	
3	Spanish	

If you're playing English dialogue in the first title, audio track 1 continues playing when you skip to the second title, so you'd hear French dialogue in the second title. Using the same track sequence for all titles will ensure consistency across your project.

If necessary, insert blank subtitle tracks to maintain the track sequence so that the DVD will continue to play the same track number when you transition between titles. However, a user could manually choose a blank subtitle track without realizing that it was intentionally left blank.

**Note:** Various brands and models of DVD players behave differently with blank subtitle tracks.

## Adding subtitle text

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open it.
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. Click to position the cursor in the timeline where you want to add the subtitle text.
- **4.** Create a subtitle event by doing one of the following actions:

Action	Description
Click the <b>Activate Track</b>	An event is added to the track, and the text box in the workspace is made editable so you can
button on the track where you want to add subtitles and then choose Subtitle Text from the	change the text. If a subtitle event exists at the cursor position, another text box is added to the workspace within the current subtitle event.
	<ul> <li>If the Auto Ripple button is is selected, subtitle events to the right of the cursor are shifted downstream to accommodate the new event.</li> </ul>
Insert menu	• If the <b>Auto Ripple</b> button is not selected, a new event is created at the cursor position, and the positions of all existing events are preserved.
Click the Insert Subtitle	This will add a subtitle event at the cursor position in all selected tracks. The text box in the
Text Event button ᠲ	workspace is not made editable, but you can edit the text later.

**5.** Repeat steps 3 and 4 to create subtitle text as needed through the project.

## Creating a graphic subtitle

To create a graphic subtitle, open your image-editing software and create a new project. Your subtitle graphic should match the frame size in DVD Architect. For example, if the frame resolution is 4:3 NTSC (720 pixels x 480 pixels) in DVD Architect, the subtitle graphic should be 720 pixels x 480 pixels.

**Note:** If you use a graphic that does not match the frame size, adjust its position after importing it. For more information, see Editing graphics properties on page 47.

Now you can choose the type of highlight mapping for your project.

Highlight mapping	Background color	Text color
Transparency	Transparent	Black
Graphics can have one layer (transparency with text) or two layers (a transparent background layer and text layer).		
Intensity	Black	White
This option gives the text a more polished, smooth look.		
Note: Anti-alias colors are mapped to the four colors in the color set.	2	
Color channel	Black	Red, blue, or green
This option allows you to use different colors simultaneously. To change the text color, see the text immediately following this table.		

To change the text color when using the color channel option:

- In the Graphics Properties pane, select Color Sets.
- Click the + button next to any of the listed color sets.
- Choose the color you want to edit. For more information, see Editing a color set on page 54.

Color Set Mode	Corresponding Color
1: fill color	Red
2: anti-alias color	Green
3: outline/background color	Blue
4: transparent color	Transparent

## Inserting a graphic subtitle

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. Click the Insert Track button 🕂 🕶 in the Timeline window and choose Insert Subtitle Track 💺 . An empty subtitle track is added to the timeline above the video track.
- 4. Click to position the cursor in the timeline where you want to add a subtitle text event.
- 5. From the Insert menu, choose Graphic to open the Insert Graphic dialog.
- 6. In the Insert Graphic dialog, browse to the .psd file (or other graphic file) and select Open to insert the subtitle graphic into the workspace.
- 7. Right-click the graphic in the workspace and choose Make Graphic Actual Size from the shortcut menu.
- 8. Click the Media button in the Graphics Properties pane and choose a setting from the Highlight mapping menu to indicate how to use the colors in the graphic. For more information, see Creating a graphic subtitle on page 111.
- 9. Select the subtitle event in the Timeline window and use the Subtitle Event page in the Media and Subtitle Properties pane to choose the color set for the event.

## Importing subtitles from a file

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open it
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. From the Insert menu, choose Subtitle Track. A new subtitle track is added to the timeline.
- 4. Click the Import Subtitles button in the Timeline window. The Import Subtitles dialog is displayed to allow you to browse to a .sub or .txt file.
- 5. When you click Open, the contents of the selected subtitle file are added to the track.

Each line in the file creates a subtitle event, and the events are spaced equally through the duration of the video. For example, the following text file would create three subtitle events:

No, 'tis not so deep as a well, nor so wide as a church-door; but 'tis enough, 'twill serve: ask for me to-morrow, and you shall find me a grave man.

**6.** You can then adjust the timing of the events to correspond with the spoken words in the audio track.

## **Exporting subtitles**

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open it.
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. Select a subtitle track in the Timeline window.
- **4.** Click the **Export Subtitles** button in the Timeline window. The Export Subtitles dialog is displayed to allow you to specify a file name and location for your file.

#### Creating subtitles from regions in a Vegas project

If you've used Vegas™ software to create the video for your DVD Architect project, you can use regions in the Vegas project to create subtitles. The length of the region determines the subtitle event length, and the region text is used as subtitle text.

- 1. Save the regions in your Vegas project to a text file.
  - a. Open your project in Vegas software.
  - **b.** Create regions in the project where the name of the region is the subtitle text you want to display.
  - **c.** Verify that no regions are overlapping.
  - d. From the Tools menu, choose Scripting, and then choose Run Script from the submenu. The Run Script dialog is displayed.
  - e. Run the Export Regions As Subtitles. js script to save your regions list as a text file.
- 2. Switch to the DVD Architect window.
- **3.** Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open it.
- 4. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 5. From the Insert menu, choose Subtitle Track. A new subtitle track is added to the timeline.
- 6. Click the Import Subtitles button 🖳 in the Timeline window. The Import Subtitles dialog is displayed.
- **7.** In the Import Subtitles dialog, browse to the file you saved in step 1.
- **8.** When you click **Open**, the contents of the selected subtitle file are added to the track.

## Adjusting subtitle event timing

A subtitle event's position on the timeline determines when it is displayed in your project, and its duration determines how long it is displayed on screen.

## Editing a single event's position

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- **3.** Drag an event in the timeline to change its position.

If the Auto Ripple button å is selected, subtitle events to the right of the event you drag will move with the event you drag.

If the Auto Ripple button is not selected, only the event you drag will move; the positions of all existing events are preserved.

Note: Events will snap to the cursor and to other event edges. If you want to trim an event to a specific time, position the cursor at that point on the timeline and drag your event edge to the cursor. If you want two subtitle events to be adjacent on the timeline, turn off Auto Ripple and drag an event edge until it snaps to the other event's edge. You can turn snapping on or off by choosing **Enable Snapping** from the **Options** menu.

**Note:** Events are forced to frame boundaries when the **Quantize to Frames** button 🔑 is selected in the Timeline window.

## Editing a series of events

- 1. Select the first subtitle event you want to edit.
- 2. Position the cursor and click the **Play** button to start playback in the timeline.
- **3.** During playback, use the following shortcut keys to adjust your subtitle events:

Shortcut Key	Description
[	Sets the start of the subtitle event at the cursor
	position.
]	Sets the end of the subtitle event at the cursor position
	and selects the next subtitle event.
	Hold Shift while pressing ] to set the end of the subtitle
	event without selecting the next event.
\	Sets the end of the current subtitle event and the start
	of the next subtitle event at the cursor position.
T	Creates a subtitle event at the cursor position.
	Press T again before the cursor passes the end of the event to set the end of the event and create a new event

**4.** Repeat step 3 to set the position of each subsequent subtitle event.

## Adjusting a subtitle event's length

A subtitle event's length on the timeline determines how long it is displayed on screen.

Subtitle events cannot exceed 12 minutes when playing your project with a DVD player. If an event exceeds 12 minutes, the subtitle will be displayed on screen only for the first 12 minutes.

1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open

- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. Hover over the edge of an event. Your cursor is displayed as a 🔄.
- **4.** Drag an event edge to change its length.

If the **Auto Ripple** button is selected, subtitle events to the right of the event you drag will move with the event you drag.

If the **Auto Ripple** button is not selected, only the event you drag will move; the positions of all existing events are preserved.

## Note:

- Events will snap to the cursor and to other event edges. If you want to trim an event to a specific time, position the cursor at that point on the timeline and drag your event edge to the cursor. If you want two subtitle events to be adjacent on the timeline, turn off Auto Ripple and drag an event edge until it snaps to the other event's edge. You can turn snapping on or off by choosing Enable Snapping from the Options menu.
- Events are forced to frame boundaries when the Quantize to Frames button is selected in the Timeline window.

## Copying formatting across subtitle events

- 1. Double-click a title in the Project Overview window (or double-click a button on a menu in the workspace) to open it.
- 2. From the View menu, choose Timeline to display the Timeline window if it isn't already visible.
- 3. Select a subtitle event and edit it. If you want to select multiple events, hold Ctrl or Shift while clicking events. The event you want to edit should be the last event you click.
  - Use the **Transformations** page in the Properties pane or drag a text object in the workspace to change its position. For more information, see Transformations on page 115.
  - Use the text bar to change the subtitle's font, size, or justification. For more information, see Text toolbar (Alt+2) on page 16.
  - Use the **Subtitle Event** page in the Properties window to change the color set used to display subtitle text. For more information, see Colors on page 115.
- **4.** Right-click the event you edited and choose a command from the shortcut menu to indicate where you want to apply the formatting:
  - Choose Apply Formatting to Selected Events to apply the formatting and position of the text object you click to other selected subtitle events.
  - Choose Apply Formatting to Selected Tracks to apply the formatting and position of the text object you click to
    other selected subtitle events.

**Note:** If subtitle events have multiple text boxes, formatting will be applied to the appropriate text boxes if possible based on object order. For example, if the event you edit has three text boxes with object order 1, 2, and 3, editing the text box with object order 2 will modify only text boxes with object order 2 on the selected events or active track.

## Editing a subtitle event's color set

You can use the Subtitles Event page in the Properties window to adjust which color set is used to draw subtitle text. You can adjust color sets independently for each subtitle track. For more information about color sets, see Colors on page 115.

#### Setting the subtitle track for timeline playback

Select the **Activate Track** button in a subtitle track header in the Timeline window to determine which track is played when you click the **Play from In Point** or **Play** button in the Timeline window.

## Changing subtitle track colors

- 1. Right-click the header and choose **Track Display Color** from the shortcut menu.
- 2. Choose a color from the submenu to set the selected track's color in the track list and the audio waveform in the timeline.

**Note:** *Track color settings are saved with your project.* 

# **Subtitle properties**

Subtitle properties allow you to adjust the text positions and color sets used to draw subtitle text.

To edit the subtitle's properties, perform the following steps:

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to
- 2. Select a subtitle event in the Timeline window or a text box in the workspace. The Properties window will display different controls depending on your current selection.
- 3. Click the specific control, click the 🗾 button, and choose a setting from the drop-down list.

#### **Subtitle Event**

#### Colors

Allows you to assign a color set to the selected subtitle events.

**Note:** Subtitle events are drawn over the entire screen. If the color set's transparent color is not fully transparent, the screen will be tinted.

#### Transformations

Allows you to adjust the subtitle text position when you select a subtitle text box in the workspace.

ltem	Description	
X position	Allows you to change the center of the selected text box's position.	
Y position		
X size	Allows you to change the size of the selected text box.	
Y size		
Maintain aspect ratio	Allows you to choose if you want the text to be stretched when you change the height or width of the text box.	

**Note:** The graphic or text event in the workspace must be selected to see these controls.

#### **Color Sets**

Color sets determine which colors are used to display subtitles. You can have four project-wide color sets that are available to every menu page in your project, and each title in your project can also have up to four custom color sets with four colors each. Each color set includes a fill color, outline/background color, anti-alias color, and transparent color.

Use the Color Sets page to edit the color sets that will be available for the selected title, and then use the Subtitle Event page to choose which color sets are used for the current subtitle. For more information, see Using color sets on page 54.

## **Generating music with Cinescore**

If you purchased the Cinescore plug-in from Sony Media Software, you can automatically generate a soundtrack for use in your DVD project.

Note: For more information on purchasing or using Cinescore, please go to www.sonymediasoftware.com/.

#### Generate a new soundtrack

- 1. To generate a new soundtrack, use one of the following methods:
  - From the Insert menu, choose Generated Music.
  - In the Timeline window, right-click an empty audio track and choose Insert Generated Music from the submenu.
  - In the Timeline window, right-click an audio event and choose Generate Music from the submenu.
  - In the Timeline window, click the Generate Music button <a>[</a>
- 2. Use the controls in the Cinescore plug-in to choose the settings for your generated music. For detailed information on using the Cinescore plug-in, please go to www.sonymediasoftware.com/.
- 3. Click OK to close the Cinescore plug-in and add the generated music to your DVD project.

## Edit an existing soundtrack

- 1. To edit an existing Cinescore soundtrack, use one of the following methods:
  - Right-click the audio event and choose Recreate Generated Music.
  - In the Properties window, select the Audio box, click the button and choose Recreate Generated Music.
- 2. Use the controls in the Cinescore plug-in to edit the settings for your generated music. For detailed information on using the Cinescore plug-in, please go to www.sonymediasoftware.com/.
- 3. Click OK to close the Cinescore plug-in and update the generated music in your DVD project.

# Chapter 10: Using Masks, Menus, and Themes

DVD Architect™ software allows you to create custom masks, menus, and themes. This gives you ultimate control while creating your projects.

A mask determines which portion of an image will be visible. You can apply masks to button thumbnails, button frames, and image highlights.

Custom menus allow you to modify the appearance of your menus. You can create custom menus using your favorite graphics application and import the .psd file as a menu.

Themes take the guesswork out of creating your DVD project. By choosing a theme, you can quickly create a snazzy new DVD menu using predefined images and background music.

# Creating custom masks

Masks determine which portion of an image will be visible. You can apply masks to button thumbnails, button frames, and image highlights.

**Note:** DVD Architect software uses the color value of the red channel to determine which portions of an image are visible: white (R, G, B = 255) represents the portions of the thumbnail (or frame) that will be visible, black (R, G, B = 0) represents the portions that will be masked out, allowing the menu background to show through, and gray areas are partially visible.

#### Thumbnail masks

A thumbnail mask limits the portion of a thumbnail image that will be visible under a button. Themes can apply thumbnail masks automatically, or you can create your own.

#### Creating thumbnail masks

You can create your own masks using the image-editing application of your choice. Create the mask as an image the same size as your thumbnail image or as a layer in the thumbnail image. The masked area can be any shape and you can use any supported media file format as a mask.

**Tip:** You can use gradients to feather the edges of a masked image.

Sample	Description
	When an image that does not support transparency (such as BMP or JPG) is used as a mask, any pixel with a red value of 255 is transparent in the mask. In this example, the white area represents the portion of the thumbnail that will be visible.
	When an image that supports transparency (such as PNG or PSD) is used as a mask, transparent portions of the mask image represent portions of the thumbnail image that will be visible.

#### Thumbnail properties

When you select a button in the workspace, the Properties window displays information about the selected button. To see more information about the thumbnail image and its mask, click the Media button in the Button Properties pane and look under the Thumbnail Properties heading.

- The Thumbnail Media box displays the path to the current thumbnail file.
- The Mask box displays the path to the current mask file.

Tip: If you're using layered .psd files, you can choose which layer you want to use as the frame or mask image. Click the button to expand the Thumbnail Media or Mask heading, and choose the layer you want to use from the Layer dropdown list (or choose **Composited layer** to use the mixed layers).


#### Frame masks

A frame mask limits the portion of a thumbnail frame image that will be visible around a button. Themes can apply frame masks automatically, or you can create your own.

#### Creating frame masks

You can create your own masks using the image-editing application of your choice. Create the mask as an image the same size as your frame image or as a layer in the frame image. The masked area can be any shape and you can use any supported media file format as a mask.

**Tip:** You can use gradients to feather the edges of a masked image.

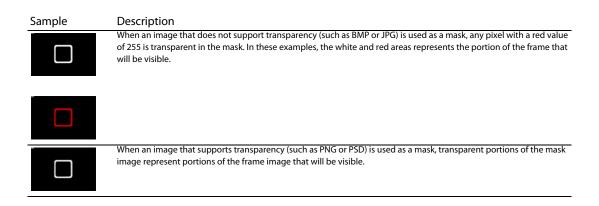

#### Frame properties

When you select a button in the workspace, the Properties window displays information about the selected button. To see more information about the frame image and its mask, click the **Media** button in the Button Properties pane and look under the **Frame Properties** heading.

- The Frame Media box displays the path to the current frame file.
- The Mask box displays the path to the current mask file.

**Tip:** If you're using layered .psd files, you can choose which layer you want to use as the thumbnail or mask image. Click the + button to expand the **Frame Media** or **Mask** heading, and choose the layer you want to use from the **Layer** dropdown list (or choose **Composited layer** to use the mixed layers).

## **Highlight masks**

A highlight mask determines where highlighting will be applied when a button is selected, activated, or inactive. A highlight mask can be applied in two different ways:

Option	Steps
Per button	1. Select a button.
	2. In the Button Properties pane, click the <b>Highlight</b> button.
	3. Select <b>Style</b> , click the button, and choose a predefined highlighting style or choose <b>Custom</b> to use a custom mask file.
	Creating a button highlight mask is just like creating a frame mask. For more information, see Creating frame masks on page 118.
Per menu	If you're designing your menus in a graphics program, you can adapt a your menu background files to create a mask file that you can apply to the menu.
	1. Select a menu in the workspace.
	2. In the Menu Page Properties pane, click the <b>Background Media</b> button.
	3. Select <b>Highlight mask</b> , click the 🔻 button, and choose the mask file that you want to use.
	4. Select <b>Highlight mask mapping</b> , click the button, and choose a control to indicate how transparency is determined from the mask.

## Creating highlight masks

- 1. Using the menu background that you created, create a new layer or file for your highlight mask.
- 2. Apply the mask to your menu:
  - a. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu that you
  - **b.** In the Menu Page Properties pane, click the **Background Media** button.
  - c. Select Highlight mask, click the 🔳 button, and choose Replace from the submenu to browse to the file that you want to use.
    - If the mask is contained in a layer within the mask file, click the 🕒 button to the left of Highlight mask, select **Layer**, click the dutton, and choose the layer you want to use.
  - **d.** Select **Highlight mask mapping**, click the **button**, and choose a setting to indicate how transparency is determined from the mask.

Mapping Mode		Description	Pixel Information
	Transparency	Maps the alpha channel of the menu highlight mask to the four colors used in the color set selected in the Selected button colors or Activated button colors drop-down list on the General page of the Menu Page Properties pane.	The most opaque pixels (those with alpha values of 192 to 255) are mapped to the color set's fill color (color 1), and the most transparent pixels (those with alpha values of 0 to 63) are mapped to the color set's transparent color (color 4).
	Intensity	Maps the average pixel intensity of the menu highlight mask to the four colors used in the color set selected in the Selected button colors, Activated button colors, or Inactive button colors dropdown list.	The lightest pixels (those with an average intensity of 192 to 255) are mapped to the color set's fill color (color 1), and the darkest pixels (those with an average intensity of 0 to 63) are mapped to the color set's transparent color (color 4).
	Color Channel	Maps color channels in the menu highlight mask to the four colors used in the color set selected in the <b>Selected button colors</b> or <b>Activated button colors</b> drop-down list.	A pixel containing any red channel component uses the color set's fill color (color 1), a pixel containing any green channel component uses the color set's anti-alias color (color 2), a pixel containing any blue component uses the color set's outline/background color (color 3), and a completely black pixel uses the color set's transparent color (color 4).

- 3. Choose the color sets that you want to use to highlight buttons on the menu when they are selected, activated, or inactive:
  - **a.** In the Menu Page Properties pane, click the **General** button.
  - **b.** Select **Selected button colors**, click the button, and choose the color set that will be used to highlight buttons on the menu when they are selected using the arrow buttons on the DVD remote control.
  - **c.** Select **Activated button colors**, click the button, and choose the color set that will be used to highlight the selected buttons on the menu when the user presses the Enter button on the DVD remote control.
  - **d.** Select **Inactive button colors**, click the button, and choose the color set that will be used to highlight buttons on the menu when they are not selected.
- **4.** Verify that your buttons do not have their own highlight mask settings:
  - **a.** Select all the buttons in the workspace.
  - **b.** In the Button Properties pane, click the **Highlight** button.
  - **c.** Select **Style**, click the Just button, and choose **Custom**.
  - **d.** Select **Mask**, click the **button**, and choose **None**.

# Creating custom menus and buttons using layered graphics

For control over the appearance of your menus, you can create custom menus and buttons using your favorite graphics application and import the .psd file as a menu. For more information, see Adding a submenu on page 39.

#### Naming requirements for layers

The layer name of your .psd file will determine which layers will be used for each part of a menu. Layer names must use the following format: Type-ID-Subtype-Name. Refer to the following list for a detailed description of the format.

#### Type

Type indicates the contents of the layer.

ltem	Description
background	Used for menu background images and menu highlight masks.
button	Used for button images and masks.

#### ID

The button ID is a numeric identifier that is used to represent related items. Refer to the following examples for layers used to create buttons in your menu:

- button-01-thumbnail
- button-01-thumbnailmask
- · button-01-frame

The ID also determines a menu's button order: button-01 will be the first button and button-02 will be the second button.

## Subtype

The subtype indicates the type of image contained in the layer.

Item	Description
thumbnail	A layer containing a thumbnail image for a menu or button.
	Note: It can be abbreviated as tmb.
thumbnailmask	A layer containing a button's thumbnail mask.
	Note: It can be abbreviated as tmbmsk.

Item	Description
highlight	A layer containing a highlight mask for a menu background or button.
	Note: It can be abbreviated as hlt.
	By default, a highlight layer uses color channel mapping to determine transparency. If you want to specify the mapping mode, use the following subtypes: highlightrgb, highlightintensity (can be abbreviated as highlightint or hitint), or highlighttransparency (can be abbreviated as highlighttrans or hittrans).
frame	A layer containing a button frame.
	Note: It can be abbreviated as frm.
framemask	A layer containing a button's frame mask.
	Note: It can be abbreviated as frmmsk.

#### Name

Name is an optional label for an object. Use **Up**, **Back**, **Prev**, and **Next** to identify layers that are used to create navigation buttons. For instance, if you have a layer named button-04-highlightintensity-back, it would be used to define the highlight mask for the fourth button on a menu. Transparency is determined using intensity mapping, and the button will be imported as the Back button.

## Creating a layered .psd menu

You can create a menu using a layered .psd file that contains the menu background, buttons, and related mask images on separate layers.

In general, try to avoid making major changes (such as adding, removing, or renaming layers) after you've created a menu using a .psd file. If you edit and save a menu's .psd file while working with your DVD Architect project, DVD Architect software will release the file when it loses focus and reload the .psd when focus is restored to the DVD Architect window. The following actions may occur depending on the changes you make to the .psd file:

If	Then
You change the contents of a layer	The corresponding object's image will be updated when you restore focus to the DVD Architect window.
You add a layer with an invalid name	The layer is ignored.
You add a layer	The layer is not detected until you choose Reapply Layout from File from the Edit menu.
You remove a layer	The corresponding object's image will be removed.
You rename a layer to an invalid name	The corresponding object's image will be removed.
You rename a layer to a valid name	The object corresponding to the previous layer name will be taken offline. The object associated with the new layer name is added when you choose <b>Reapply Layout from File</b> from the <b>Edit</b> menu.

1. In your image-editing application, start a new image. Your image should match the height of the output format frame size and the width should include compensation for the output format's pixel aspect ratio:

Output Format	Aspect Ratio	Menu Size
4:3 NTSC (720 x 480)	.9091	655 x 480
Widescreen NTSC (720 x 480)	1.2121	873 x 480
4:3 PAL (720 x 576)	1.0926	787 x 576
Widescreen PAL (720 x 576)	1.4568	1049 x 576

- 2. Create layers for your menu background images:
  - a. If you would like to group background layers, create a layer set named background-01-group.
  - b. For the menu background, create a layer named background-01. Static titles, images, and other background elements should be merged into this layer.
  - c. For the menu's highlight mask, which is optional, create a layer named background-01-highlight.

If your .psd file will use button-specific highlight mask images, you can skip this layer.

- 3. Create layers for your button images:
  - a. If you would like to group button layers, create a layer set named button-01-group.
  - **b.** For the main button image, create a layer named button-01-thumbnail or if you are going to use the Media page in the Button Properties pane to assign a thumbnail, then you can skip this layer.
  - **c.** For the button's mask image, which is optional, create a layer named button-01-thumbnailmask. The mask determines which part of the thumbnail will be visible inside the button.
  - **d.** For the button's frame image, which is optional, create a layer named button-01-frame. The frame image is displayed around the button.
  - **e.** For the frame's mask image, which is optional, create a layer named button-01-framemask. The frame mask determines which portion of the frame image will be visible.
  - **f.** For the button's highlight mask, which is optional, create a layer named button-01-highlight. The highlight mask determines where highlighting will be applied when a button is selected or activated.

If your .psd file will use a menu-specific highlight mask, you can skip this layer.

- 4. Repeat step 3 as needed, incrementing the ID for each button.
- 5. Create layers for navigation buttons as needed.

#### **Note:** If you omit navigation button layers, empty buttons will be used.

- a. If you would like to group navigation button layers, create a layer set named button-02-group.
- **b.** For the main button image, which is optional, create a layer named button-02-thumbnail-next or if you are going to use the Media page in the Button Properties pane to assign a thumbnail, then you can skip this layer.

Appending "next" to the end of the layer name tells DVD Architect software that this layer is used for a next navigation button. Your menu could also include button-03-thumbnail-up, button-02-thumbnail-back, or button-03-thumbnail-prev.

- **c.** For the button's mask image, which is optional, create a layer named button-02-thumbnailmask-next. The mask determines which part of the thumbnail will be visible inside the button.
- **d.** For the button's highlight mask, create a layer named button-02-thumbnailmask-next. The highlight mask determines where highlighting will be applied when a button is selected or activated.

If your .psd file will use a menu-specific highlight mask, you can skip this layer.

## Creating custom menus and buttons using single-layer graphics

You can create custom menus using your favorite graphics application. If the application does not support layers, then refer to the steps outlined below.

- 1. Use your image-editing application to create your menu:
  - **a.** Start a new image. Your image should match the height of the output format frame size and the width should include compensation for the output format's pixel aspect ratio:

Output Format	Aspect Ratio	Menu Size
4:3 NTSC (720 x 480)	.9091	655 x 480
Widescreen NTSC (720 x 480)	1.2121	873 x 480
4:3 PAL (720 x 576)	1.0926	787 x 576
Widescreen PAL (720 x 576)	1.4568	1049 x 576

- **b.** Include the background, buttons, and text that you want to display in a single layer.
- **2.** Create a highlight mask image to display where highlighting will be applied when a button is selected or activated. *For more information, see Highlight masks on page 119*.
- **3.** Add a menu to your project. For more information, see Adding a submenu on page 39.
- 4. Remove the default text from the menu.
- 5. Add your background image:
  - a. Click the Background Media button on the Menu Page Properties page.
  - **b.** Select **Video**, click the Jutton, and choose **Replace** from the menu to browse to your custom background image.

If the menu background is contained in a layer within the image, click the 🕒 button to the left of Video, select **Layer**, click the button, and choose the layer you want to use.

- c. Select Stretch type, click the button, and choose Stretch to Fit.
- **6.** Add buttons to the menu:
  - a. From the Insert menu, choose Empty button.
  - **b.** With the sizing tool is selected, click the new button's default text label and press **Delete**.
  - Using the sizing tool, drag the empty button rectangle and drop it over a button image in your menu background.
  - d. Drag the edges of the empty button with the sizing tool (or use the controls on the Transformations page of the Button Properties pane) to resize the empty button so the entire button image is contained within the empty button's rectangle.

If the button image extends beyond the empty button rectangle, button highlighting will be applied only to the portion of the button within the rectangle.

e. In the Button Properties pane, click the Action button and choose a menu or title from the Destination dropdown to set the button's target.

If the title you want to use as a destination isn't part of your project yet, you can drag a media file from the Explorer window to the root of the Project Overview window to add it to your project without creating a button in the current menu.

- 7. Repeat step 6 for each menu button.
- 8. Remove the default button highlighting:
  - a. Select all the buttons in the workspace.
  - **b.** In the Button Properties pane, click the **Highlight** button.
  - **c.** Select **Style**, click the Jutton, and choose **Custom**.
  - **d.** Select **Mask**, click the Just button, and choose **None**.
- 9. Apply your menu highlight mask:
  - a. In the Menu Page Properties pane, click the Background Media button.
  - b. Select Highlight mask, click the 🗾 button, and choose Replace from the submenu to browse to the file that you want to use.

If the mask is contained in a layer within the mask file, click the 🛨 button to the left of Highlight mask, select **Layer**, click the **button**, and choose the layer you want to use.

- c. Select Highlight mask mapping, click the Dutton, and choose a setting to indicate how transparency is determined from the mask.
- 10. Choose the color sets that you want to use to highlight buttons on the menu when they are selected, activated, or inactive:
  - a. In the Menu Page Properties pane, click the General button.
  - b. Select Selected button colors, click the 🗾 button, and choose the color set that will be used to highlight buttons on the menu when they are selected using the arrow buttons on the DVD remote control.
  - c. Select Activated button colors, click the 🗖 button, and choose the color set that will be used to highlight the selected buttons on the menu when the user presses the Enter button on the DVD remote control.
  - **d.** Select Inactive button colors, click the button, and choose the color set that will be used to highlight buttons on the menu when they are not selected.

## Working with themes

A theme is a style sheet for your DVD menu page. Each theme will include all pertinent information about the menu, including layout parameters (e.g. button sizes, positioning, and spacing), font and text parameters, and graphics and audio information.

## Applying themes

You can apply a theme to an entire project when you start the project, or you can apply themes to specific menu pages as you work. You use the **Themes** window at the bottom of the workspace to select and apply the themes. Once you apply a theme to a menu, the properties of the menu immediately change to those defined in the theme.

**Note:** To undo the application of a theme, click the **Undo** button 👆.

Several themes are included for you to use in your projects. You can also create your own themes by editing an existing theme.

## Choosing a theme

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu you want to edit.
- 2. Double-click a theme in the **Themes** window to apply it to the selected menu.

**Note:** You can also apply a theme by dragging it from the Themes window to the workspace or by selecting the theme and clicking the Apply Theme button  $\blacksquare$ .

## Applying a theme's alignment to menu objects

You can automatically align menu objects when adding media to a menu.

Select the **Double-clicking files in the Explorer reapplies theme layout** check box on the **General** tab of the Preferences dialog if you want to automatically realign objects according to the current theme when you double-click media files in the Explorer. When you double-click a file, the new file is added, and the objects are realigned on the menu.

When the check box is cleared, the media files are added to the menu and existing object positions are preserved.

From the Edit menu, choose Reapply Theme Layout to realign objects at any time.

#### Deleting a theme

1. In the Themes window, select the theme that you would like to delete.

Note: Default DVD Architect themes or themes used in your project cannot be deleted.

- 2. Click the Delete Theme button x . A warning dialog is displayed asking you to confirm your theme deletion.
- 3. Click the Yes button to continue.

## Creating custom themes

To create your own theme, you'll need an understanding of XML.

Themes are installed into a folder at C:\Documents and Settings\Your Username\Application Data\Sony\DVD Architect\4.0\Themes. Each theme is saved as a .thm file, which is essentially a .zip file that contains the theme's XML file and media.

**Note:** In previous versions of DVD Architect, themes were installed in a subfolder below the program folder. However, not all users could access the Program Files folder and the theme information. With the current folder location, if two or more people are using DVD Architect from the same computer the theme information will be duplicated.

The easiest way to create your own themes is to work on a copy of an existing theme.

- 1. Create a copy of the theme you want to modify and rename the file.
- 2. Open the .thm file in a program such as WinZip® and extract the files to a working folder.
- **3.** Edit the theme's files as necessary:
  - You must change the <NAME> tag in the <THEME-INFORMATION> section to a unique name for the theme. Otherwise, your theme will not be detected.
  - Change the <AUTHOR>, <COPYRIGHT>, and <ABOUT> tags as well with your own information.
  - The default.xml file contains all information about the layout, including button positioning/spacing, font, text, graphics, and audio information. Do not rename this file. Check all tags and references in this file prior to saving, because any errors or mistakes will cause your theme to go undetected.
  - The media files in the theme are used for button and menu graphics, backgrounds, and audio. You can use any file format that DVD Architect software supports, including .bmp, .png, .jpg, .gif, .avi, and .wav.
- Resave the .zip file, renaming it to a .thm file, in the themes subfolder below the program folder. The new theme will be detected the next time you start the program and displayed in the **Themes** tab.

**Warning:** If there are any mistakes or missing files referenced in the default.xml file, the theme will not load.

## Exporting menu as a theme

Have you created a menu that you would like to use over and over, but don't have time to create it time and time again? If your answer is yes, then we have a solution for you! You can now save the characteristics of a menu — such as background video or audio; button positions; sizes, shapes, and text fonts; and formatting —and add them to the Themes window for use at any time.

You can design your own menu or work on a copy of an existing menu and then export it as a theme.

**Note:** The Buttons window will only display buttons that are defined in the grid theme type.

## Learning about positional and grid themes

When you export a menu as a theme using the simple view, the theme is exported as a positional theme. If you click the Advanced button, you can choose to export a grid-based theme, which gives you more control over the elements in the theme.

Refer to the following table for details about the data that each theme stores:

Theme Type	e	Theme Elements
Positional	Grid	
X	Χ	menu title (including text, color, position, size and text properties)
X	Χ	menu length
X	Χ	menu loop point
X	Χ	color set information for selected, activated, and inactive buttons
X	Χ	information about effects (cropping, brightness, contrast, and colorization
		for each saved graphical element)
X		text and graphics with the menu
X	Χ	information about buttons (size, position, image media, text, text
		properties, image and text layout)
'	Χ	grid layout information
X	Χ	reduce interlace flicker setting
	Χ	background video, audio media, and highlight mask images and settings

## Working with positional themes

#### Applying a positional theme

When applying a positional theme, items on the menu display exactly as defined in the current theme.

Applying a positional theme type will operate differently depending on whether or not buttons currently exist on the menu to which the theme is being applied.

- If no buttons exist, then all buttons from the theme are added, sized, and positioned as defined in the theme.
- If one or more buttons exist, then the buttons are updated based on their matches in the theme. However; if there are more buttons on the menu than the number defined in the theme, then the extra buttons on the menu will not change.

Text and graphical elements will be updated based on the theme:

- If more text or graphical elements exist on the menu than are defined in the theme, then extra elements will not be updated.
- If fewer text or graphical elements exist on the menu than are defined in the theme, then extra elements will be added.

#### Exporting as a positional theme

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu that you want to use to create your theme.
- 2. From the File menu, choose Export Menu as Theme. The Export Menu as Theme dialog is displayed.



In the workspace, right-click the menu and choose Export Menu as Theme.

3. In the Name box, type a name for the theme.

**Note:** Your theme name can have no more than 16 characters, including spaces.

4. Click the Save button. The Themes window is refreshed and your theme is added.

## Working with grid themes

## Applying a grid theme

When applying a grid them, existing buttons are repositioned and resized on the menu to display in a row and column format.

Note: No buttons are added or deleted.

# Saving a grid theme

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu that you want to use to create your theme.
- 2. From the File menu, choose Export Menu as Theme. The Export Menu as Theme dialog is displayed.



In the workspace, right-click the menu and choose Export Menu as Theme.

**3.** In the **Name** box, type a name for the theme.

Note: Your theme name can have no more than 16 characters, including spaces.

- 4. Click the Advanced button to modify theme specifications.
- **5.** Select **Theme type**, click the button, and choose **Grid** from the drop-down list.
- 6. Edit your grid layout properties. For more information, see Modifying grid layout properties on page 127.
- 7. Click the Save button. The Themes window is refreshed and your theme is added.

## Modifying grid layout properties

Select the specific property, click the 

| button, and choose a setting from the drop-down list.

**Tip:** If you want to view changes in the workspace as you edit the properties, select the **Preview changes** check box.

#### Orientation

Specifies the button arrangement within the grid.

ltem	Description
Horizontal	1 2 3
	4 5 6
Vertical	Arranges buttons vertically.
	1 3 5
	2 4 6

## Horizontal alignment

Specifies the horizontal alignment for all buttons that are non-navigational in the menu.

ltem	Description
Left	Horizontally aligns buttons to the left of the cells in the grid.
Center	Horizontally aligns buttons to the center of the cells in the
	grid.
Right	Horizontally aligns buttons to the right of the cells in the grid.

## Vertical alignment

Specifies the vertical alignment for all buttons that are non-navigational in the menu.

ltem	Description
Тор	Vertically aligns buttons to the top of the cells in the grid.
Center	Vertically aligns buttons to the center of the cells in the grid.
Bottom	Vertically aligns buttons to the bottoms of the cells in the grid.

## Margin

Allows you to specify the left, right, top and bottom margins of the grid for button placement.

## **Item Spacing**

Allows you to specify the horizontal and vertical spacing between items.

# Item, Next, Previous and Up Button

Click the 🛨 button to the left of the Item Button, Next Button, Previous Button and Up Button and edit the appropriate property settings.

ltem	Description
Button rectangle	Allows you to specify the <b>Left</b> , <b>Right</b> , <b>Top</b> and <b>Bottom</b> position
	of the button.
Image rectangle	Allows you to specify the <b>Left</b> , <b>Right</b> , <b>Top</b> and <b>Bottom</b> position
	of the image related to the button.
Text rectangle	Allows you to specify the <b>Left</b> , <b>Right</b> , <b>Top</b> and <b>Bottom</b> position
	of the text related to the button.
Button style	Allows you to select how the buttons will display on your menus.
	Text only: Displays a text-only link.
	Image only: Displays only a graphical button.
	Text and image: Displays a graphical button with a text label.

# **Chapter 11** Using Scripting

Scripting in DVD Architect gives you even more options for creativity when designing your DVD. Among other things, you can customize the play order of your DVD, create simple games, and add navigation clues. The scripting feature in DVD Architect is based on the DVD-Video specification.

The following are some examples of what you can do with scripting in DVD Architect:


- · Create a quiz-style game which keeps score based on the user's selections and customizes the result based on the score.
- · Play random videos.
- Choose menus or videos to play based on the DVD player's language, parental management, and other settings.
- Require a passcode to "unlock" the DVD for playback.

Scripts have two main functions for DVD playback: jumping to a new location (such as a track or menu) or playing a different stream (audio, video, or subtitle). You can assign a script to almost anything in your project that supports scripts, such as menus, buttons, and end actions.


Each script can contain any combination of three statement types: commands, labels, or comments.

- Commands execute an action for a step in your script. Commands can utilize the standard capabilities in most DVD players, allowing you to further expand and customize your options for DVD playback. These DVD player functions are accessed by the script command using the player's General Purpose Register Mémories (GPRMs) and System Parameter Register Memories (SPRMs)
- Labels are used to mark sections of a script to which you want to link. You can link from one section of a script to another using your defined label.
- Comments are used within the script to help you identify and track the purpose of statements. Comments are ignored by the script.


Scripts are created using the DVD Scripts window...

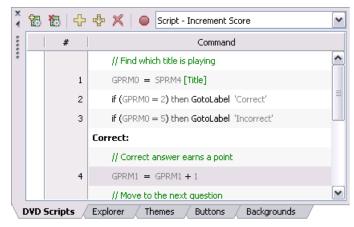

...and script statements are defined using the Script Properties window.



Once you've inserted a DVD script, it is displayed at the bottom of the Project Overview window:



## Adding an existing script to a menu or title

To add an existing script to a menu or object, drag a script from the DVD Scripts heading in the Project Overview window to the item in the workspace.

## Creating a script

If you want to add a script to a menu in an existing menu-based project, perform the following procedure.

- 1. Double-click a menu in the Project Overview window (or navigate in the workspace) to open the menu from which you want to link to the script.
- 2. From the Insert menu, choose Script. A button is added to the menu as a link to the script.



Click the Insert Object 🕂 button in the Project Overview window and then click Insert Script button 🐏 .



3. Use the DVD Scripts window to rearrange add, or delete statements in the script.

## Inserting a statement in a script

- 1. Double-click a DVD script in the Project Overview window (or choose a script from the drop-down list at the top of the DVD Scripts window) to open the script you want to edit.
- 2. In the DVD Scripts window, click the line where you want to insert a statement.
- 3. Click Insert Statement +. The new statement is inserted above the selected line.
- 4. Edit your statement in the Script Properties window. For more information, see Editing a script's statements in the Script Properties window on page 131.

## Appending a statement to a script

- 1. Double-click a DVD script in the Project Overview window (or choose a script from the drop-down list at the top of the DVD Scripts window) to open the script you want to edit.
- 2. Click Append Statement . The new statement is appended to the end of your script.
- 3. Edit your statement in the Script Properties window. For more information, see Editing a script's statements in the Script Properties window on page 131.

## Removing a statement from a script

- 1. Double-click a DVD script in the Project Overview window (or choose a script from the drop-down list at the top of the DVD Scripts window) to open the script you want to edit.
- 2. Select a statement in the DVD Scripts window.
- 3. Press Delete or click **Delete Statement** X. The selected tatement is removed from your script.

## Rearranging statements in a script

- 1. Double-click a DVD script in the Project Overview window (or choose a script from the drop-down list at the top of the DVD Scripts window) to open the script you want to edit.
- 2. Drag statements in the DVD Scripts window up or down to change their order.

## Editing a script's statements in the Script Properties window

You can use the Script Properties controls in the Properties window to adjust settings for each statement in your DVD script.

To edit a script's properties, perform the following actions:

- 1. If the window isn't already visible, choose Properties from the View menu.
- 2. Double-click a DVD script in the Project Overview window (or navigate in the workspace) to select the script you want to edit (or choose a script from the drop-down list at the top of the DVD Scripts window).
- In the DVD Scripts window, click the statement you want to edit. The Script Properties display in the Properties window.

#### Editing a command

Commands statement types determine what happens at this step in the script. You can use commands to assign values or set links to a GPRM (General Purpose Register Memory), skip to other sections of the script, set the audio, video, and subtitle tracks, resume or stop playback, and more. Optionally, you can also set specific conditions that must be present for these commands to be executed.

To create a command statement, choose Command from the Statement type drop-down list. Choose the type of command from the Command drop-down list:

Command Type	Description
Nop	No operation is currently invoked in this command. This is the default setting for all commands. A <b>Nop</b> command is ignored by the script.
Link	Links to a title or menu on your DVD. When adding a link, you can use the <b>Destination</b> , <b>Destination chapter</b> and <b>Destination button</b> controls to customize the link.
	Destination: Choose the menu, title, playlist, or script that will be displayed.
	Destination chapter: When your statement links to a video, music/video compilation, or playlist, choose the specific chapter that will be displayed.
	Destination button: When your statement links to a menu, choose the button you want to use as the default selected button in the destination menu.
GotoLabel	Links to a label elsewhere in the current script. When the script is run, it will begin executing statements listed after the label.
	Choose a setting from the Label drop-down list to select the label to which you want to link.
	For more information, see Editing a label on page 132
Set GPRM	Assigns a value or asset to a GPRM:
	• Target: Sets the GPRM you want to use for this asset (0-5).
	Operator: Modifies the target's value. There are 11 operators from which to choose.
	Source: Sets the source (SPRM, GPRM, value, or link, depending upon the operator you selected) for the command. Use the controls below to choose the SPRM or GPRM index, the numeric value, or the link destination.
	For more information, see General Purpose Register Memories (GPRM) on page 134.

Link GPRM	Links to the specified GPRM. For example, you can assign a GPRM to a link using the <b>Set GPRM</b> command, and then use the <b>Link GPRM</b> command to execute the link in your script.
SetMode GPRM Sets the specified GPRM to either register or counter mode.	
	Target: Sets the GPRM you want to use for this command (0-5).
	Mode: Sets the mode (counter or register) for the command.
SetStreams Sets the audio or subtitle track or the video angle.	
	Set audio track: Choose a setting from the drop-down list to select which audio track will be played. Choose No change to use the last-set track.
	Set subtitle track: Choose a setting from the drop-down list to select which subtitle track will be played. Choose No change to use the last-set track.
	Set video angle: Choose a setting from the drop-down list to select which video track will be played. Choose No change to use the last-set track.
Resume	Resume playback at the specified destination.
	In the <b>Destination</b> drop-down list, choose the media file that will be accessed.
Stop	Stop playback. You can also specify that playback is stopped only if the specified conditions are met.

Next, you can set the conditions that must be present for the command to execute:

Item	Description		
Condition	None No conditions must be met; the command will always execute as specified in the Command drop-down list.		
	<ul> <li>&lt; Less than. The command will be executed if the specified GPRM is less than the specified right operand item.</li> </ul>		
	<ul> <li>&lt;= Less than or equal. The command will be executed if the specified GPRM is less than or equal to the specified right operand item.</li> </ul>		
	<ul> <li>= Equal. The command will be executed if the specified GPRM is equal to the specified right operand item.</li> </ul>		
	<ul> <li>&gt;= Greater than or equal. The command will be executed if the specified GPRM is greater than or equal to the specified right operand item.</li> </ul>		
	<ul> <li>&gt; Greater. The command will be executed if the specified GPRM is greater than the specified right operand item.</li> </ul>		
	<ul> <li>!= Not equal. The command will be executed if the specified GPRM is not equal to the specified right operand item.</li> </ul>		
	<ul> <li>&amp; And. The script performs a bitwise AND comparison. If the result of the bitwise AND comparison is 0, then the condition is false and the command is not executed. If the result of the bitwise AND comparison is anything other than 0, then the condition is true and the command is executed.</li> </ul>		
Left operand	Choose the GPRM you want to use for this condition (0-5).		
Right operand	Choose the right operand item you want to use for this condition:		
	• SPRM: Choose the SPRM variable to compare to your specified GPRM in the left operand.		
	• <b>GPRM</b> : Choose the GPRM to compare to your specified GPRM in the left operand.		
	• Value: Choose the numeric value to compare to your specified GPRM in the left operand.		

## **Editing a label**

A label statement type inserts a label in the script. Labels can be used to mark sections of a script to which you want to link.

To create a label statement, choose Label from the Statement type drop-down list. In the Label box, type the text you want to display in the label.

Once you've set a label statement, you can create a GoToLabel command to link from one section of a script to another using your defined label, and the script will begin executing the statements after the label.

## **Notes:**

- When you set a GotoLabel command, this label will display as an option in the Label control drop-down list.
  Label statements can only be used to link within a script; links from one script to a label in another script are not supported.

## **Editing a comment**


The Comment statement type inserts a comment in the script. Comments are ignored by the script and not seen by the DVD viewer, but you can use them during the script building and testing process to organize your script or add information.

To insert a comment statement, choose Comment from the Statement type drop-down list. In the Comment box, type the text you want to display in the comment.


## **Testing a script**

You can use the Script Debugger pane in the Preview window to test and debug your DVD scripts.


1. Click the drop-down arrow next to the **Preview** button 🕦 Preview 🔻 on the main toolbar choose a preview mode:



2. Once the Preview window is displayed, click the DVD Script Debugger button by to display the Script Debugger pane at the bottom of the Preview frame.

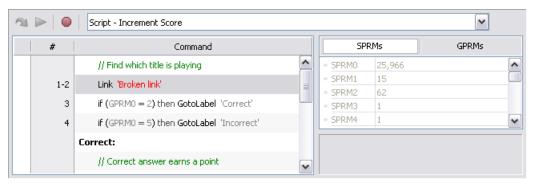

**3.** Use the controls in the Script Debugger pane to test your script.:

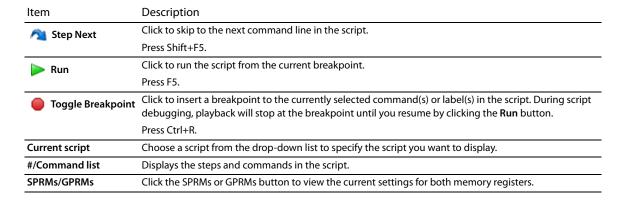

## Renaming a script

- 1. Right-click a DVD script in the Project Overview window and choose Rename from the shortcut menu.
- **2.** Type a new name in the edit box.
- 3. Press Enter.

## Deleting a script

Right-click a DVD script in the Project Overview window and choose Delete from the shortcut menu.

## Setting a DVD start script

A DVD start script is the script that will execute when the DVD is inserted in a DVD player. This script takes precedence over the item you've designated as your DVD Start item. For more information, see Setting the DVD start item on page 27.

To set your DVD start script, right-click a DVD script in the Project Overview window and choose **DVD Start Script** from the shortcut menu.

**Tip:** You can also set the DVD start script in the Disc Properties section of the Project Properties window. *For more information, see Disc properties on page 27.* 

# **General Purpose Register Memories (GPRM)**

DVD scripts use General Purpose Register Memories (GPRM) to temporarily store values or assets assigned by a script command. For example, you can assign a GPRM's value to another GPRM's value, an SPRM's value, a number, or link to an asset in your project.

Since only six GPRMs (0-5) are available for storage, you should attempt to plan your script ahead of time and use the GPRMs wisely.

## **System Parameter Register Memories (SPRMs)**

DVD players use variables, called System Parameter Register Memories (SPRMs), to specify the current settings for the player, such as the audio stream, camera angle, or parental level. You can use the power of scripting in DVD Architect to access these variables during the navigation and playback of your DVD, allowing you to customize the viewing experience based on certain conditions.

The SPRMs are defined below:

SPRM	Description	
0	Menu language code	
	For more information, see Language codes on page 135.	
1	Audio track number	
2	Subtitle track number	
3	Video angle number	
4	Title number	
5	Video title set (VTS) number	
6	Title program chain number	
7	Chapter number	
8	Highlighted button number	
9	Navigation timer	
10	Navigation timer destination (which track to play when navigation timer in SPRM 9 expires)	
11	Player audio mixing mode for karaoke	
12	Country code for parental management	
13	Parental management level	
14	Player configuration for video	
15	Player configuration for audio	
16	Initial audio language code	
17	Initial audio language code extension	
18	Initial language	
19	Initial subtitle language extension	
20	Player region code	
21	Reserved	
22	Reserved	

# Language codes

The following table lists the language codes supported by DVD Architect software.

Use the number from the Value column when writing scripts.

Abkhazian         ab         24930           Afar         aa         24929           Afrikaans         af         24934           Albanian         sq         29553           Amharic         am         24941           Arabic         ar         24946           Armenian         hy         26745           Assamese         as         24947           Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25185           Basque         eu         25973           Bengali         bn         25188           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan <th>Language</th> <th>Code</th> <th>Value</th>	Language	Code	Value
Afrikaans af 24934 Albanian sq 29553 Amharic am 24941 Arabic ar 24946 Armenian hy 26745 Assamese as 24947 Aymara ay 24953 Azerbaijani az 24954 Bashkir ba 25185 Basque eu 25973 Bengali bn 25198 Bhutani dz 25722 Bihari bh 25192 Bislama bi 25193 Breton br 25202 Bulgarian bg 25191 Burmese my 28025 Byelorussian be 25189 Cambodian km 27501 Catalan ca 25441 Chinese zh 31336 Corsican co 25455 Croatian hr 26738 Czech cs 25459 Danish da 25697 Dutch nl 28268 English en 25966 Esperanto eo 25967 Estonian et 25972 Faroese fo 26223 Fiji fj 26218 Finnish fi 26217 French fr 26226 Frisian gl 26476 Georgian ka 27489 German de 25701 Greek el 25964 Greenlandic kl 27500 Guarani gn 26478 Gujarati gu 26485 Hausa ha 26721	Abkhazian	ab	24930
Albanian         sq         29553           Amharic         am         24941           Arabic         ar         24946           Armenian         hy         26745           Assamese         as         24947           Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish	Afar	aa	24929
Amharic         am         24941           Arabic         ar         24946           Armenian         hy         26745           Assamese         as         24947           Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch	Afrikaans	af	24934
Arabic         ar         24946           Armenian         hy         26745           Assamese         as         24947           Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English	Albanian	sq	29553
Armenian         hy         26745           Assamese         as         24947           Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto	Amharic	am	24941
Assamese         as         24947           Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian	Arabic	ar	24946
Aymara         ay         24953           Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25972           Faroese         fo         26223           Fiji	Armenian	hy	26745
Azerbaijani         az         24954           Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish	Assamese	as	24947
Bashkir         ba         25185           Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25972           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finisian	Aymara	ay	24953
Basque         eu         25973           Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French	Azerbaijani	az	24954
Bengali         bn         25198           Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian	Bashkir	ba	25185
Bhutani         dz         25722           Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician	Basque	eu	25973
Bihari         bh         25192           Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian	Bengali	bn	25198
Bislama         bi         25193           Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German	Bhutani	dz	25722
Breton         br         25202           Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek	Bihari	bh	25192
Bulgarian         bg         25191           Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Guarani	Bislama	bi	25193
Burmese         my         28025           Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani	Breton	br	25202
Byelorussian         be         25189           Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gu         26485           Hausa	Bulgarian	bg	25191
Cambodian         km         27501           Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gu         26485           Hausa         ha         26721	Burmese	my	28025
Catalan         ca         25441           Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gu         26478           Gujarati         gu         26485           Hausa         ha         26721	Byelorussian	be	25189
Chinese         zh         31336           Corsican         co         25455           Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gu         26485           Hausa         ha         26721	Cambodian	km	27501
Corsican Co 25455 Croatian hr 26738 Czech cs 25459 Danish da 25697 Dutch nl 28268 English en 25966 Esperanto eo 25967 Estonian et 25972 Faroese fo 26223 Fiji fj 26218 Finnish fi 26217 French fr 26226 Frisian gl 26476 Georgian ka 27489 German de 25701 Greek el 25964 Greenlandic kl 27500 Guarani gn 26478 Gujarati gu 26485 Hausa ha 26721	Catalan	ca	25441
Croatian         hr         26738           Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Chinese	zh	31336
Czech         cs         25459           Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Corsican	со	25455
Danish         da         25697           Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Croatian	hr	26738
Dutch         nl         28268           English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Czech	CS	25459
English         en         25966           Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Danish	da	25697
Esperanto         eo         25967           Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Dutch	nl	28268
Estonian         et         25972           Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	English	en	25966
Faroese         fo         26223           Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Esperanto	eo	25967
Fiji         fj         26218           Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Estonian	et	25972
Finnish         fi         26217           French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Faroese	fo	26223
French         fr         26226           Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Fiji	fj	26218
Frisian         fy         26233           Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Finnish	fi	26217
Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	French	fr	26226
Galician         gl         26476           Georgian         ka         27489           German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Frisian	fy	26233
German         de         25701           Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Galician		26476
Greek         el         25964           Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Georgian	ka	27489
Greenlandic         kl         27500           Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	German	de	25701
Guarani         gn         26478           Gujarati         gu         26485           Hausa         ha         26721	Greek	el	25964
Gujarati gu 26485 Hausa ha 26721	Greenlandic	kl	27500
Hausa ha 26721	Guarani	gn	26478
Hausa ha 26721	Gujarati	gu	26485
Hebrew iw 26999			26721
	Hebrew	iw	26999

Language	Code	Value
Hindi	hi	26729
Hungarian	hu	26741
Icelandic	is	26995
Indonesian	in	26990
Interlingua	ia	26977
Interlingue	ie	26981
Inupiak	ik	26987
Irish	ga	26465
Italian	it	26996
Japanese	ja	27233
Javanese	jw	27255
Kannada	kn	27502
Kashmiri	ks	27507
Kazakh	kk	27499
Kinyarwanda	rw	29303
Kirghiz	ky	27513
Kirundi	rn	29294
Korean	ko	27503
Kurdish	ku	27509
Laothian	lo	27759
Latin	la	27745
Latvian	lv	27766
Lingala	ln	27758
Lithuanian	lt	27764
Macedonian	mk	28011
Malagasy	mg	28007
Malay	ms	28019
Malayalam	ml	28012
Maltese	mt	28020
Maori	mi	28009
Marathi	mr	28018
Moldavian	mo	28015
Mongolian	mn	28014
Nauru	na	28257
Nepali	ne	28261
Norwegian	no	28271
Occitan	ос	28515
Oriya	or	28530
Oromo	om	28525
Pashto	ps	28787
Persian	fa	26209
Polish	pl	28780
Portuguese	pt	28788
Punjabi	pa	28769
Quechua	qu	29045
Queeriuu	94	27013

Language	Code	Value
Rhaeto-Romance	rm	29293
Romanian	ro	29295
Russian	ru	29301
Samoan	sm	29549
Sangho	sg	29543
Sanskrit	sa	29537
Scots Gaelic	gd	26468
Serbian	sr	29554
Serbo-Croatian	sh	29544
Sesotho	st	29556
Setswana	tn	29806
Shona	sn	29550
Sindhi	sd	29540
Sinhalese	si	29545
Siswati	SS	29555
Slovak	sk	29547
Slovenian	sl	29548
Somali	so	29551
Spanish	es	25971
Sundanese	su	29557
Swahili	SW	29559
Swedish	SV	29558
Tagalog	tl	29804
Tajik	tg	29799
Tamil	ta	29793
Tatar	tt	29812
Telugu	te	29797
Thai	th	29800
Tigrinya	ti	29801
Tonga	to	29807
Tsonga	ts	29811
Turkish	tr	29810
Turkmen	tk	29803
Twi	tw	29815
Ukrainian	uk	30059
Urdu	ur	30066
Uzbek	uz	30074
Vietnamese	vi	30313
Volapuk	vo	30319
Welsh	су	25465
Wolof	wo	30575
Xhosa	xh	30824
Yiddish	ji	27241
Yoruba	yo	31087
Zulu	zu	31349

# **Chapter 12** Previewing Projects

You can preview your project before you begin the DVD preparation process. The most common method for previewing is from within the DVD Architect™ window. In this method, you can simulate how your project will look on a television screen and how it will perform in a DVD player. You can also preview on an external monitor. Both methods are covered in this chapter.

## **Preview window**

The Preview window allows you to preview your DVD Architect project on a simulated television screen with a virtual remote control.



## Preview toolbar

🔀 Close	Close Preview: Closes the preview window.		Copy to Clipboard: Allows you to copy to the clipboard.
	Preview on External Monitor: Allows you to preview your DVD on an external monitor device.	<b></b>	DVD Script Debugger: Allows you to debug your DVD script.
<b>E</b> 3	Stretch Preview to Window: Stretches the DVD to the full viewing window.	High	Preview Quality: Allows you to change the preview quality.
	View Safe Areas: Allows you to view the safe areas lines.		

## Previewing your project

To ensure that your project looks just the way you intended it, you can preview your DVD Architect project on a simulated television screen with a virtual remote control.

1. Click the drop-down arrow next to the **Preview** button **Preview** on the main toolbar to choose a preview mode:

Preview Mode	Description
Preview Current	Starts the preview with the current page.
Preview Disc	Starts the preview at the beginning of your disc (including any introductory media).

The preview window is displayed.

2. Use the Preview Quality button to set your playback quality.

**Note:** Decreasing the preview quality can allow you to preview your project when your computer cannot render the project in real time.

- 3. If you want to verify whether any of your objects are outside the title and action safe areas, click the View Safe Areas button . The grids for the Title Safe and Action Safe areas display while your project is previewing. If you see clipping during the preview, you can make corrections in your project.
- **4.** Use the buttons on the remote control to navigate and play your project.
- **5.** Click the **Preview on External Monitor** button if you want to send your project to the external monitor device specified on the **Video Device** tab of the **Preferences** dialog. For more information, see Previewing on an external video monitor on page 138.
- **6.** To end the preview and return to the main window, click the **Close** button 🛛 close .

## Previewing on an external video monitor

You can feed video directly from the DVD Architect window to a television monitor. With this feature, you can make your final editing decisions on a broadcast monitor (which differs significantly from a computer monitor) before preparing or burning your DVD. To use an external monitor, you must have the following hardware:

- OHCI-compliant iLink® (also known as FireWire® or IEEE-1394) DV card
- DV camcorder or DV-to-analog converter box


While configuring your computer for DV external monitor previewing is not difficult, the setup may require some troubleshooting. The Sony Media Software user forum is a good resource for peer-to-peer system troubleshooting:

http://mediasoftware.sonypictures.com/forums

**Note:** External monitor output is for verifying colors, menu layout, and safe areas only and is not an indication of playback synchronization of the final burned disc.

## Setting up an external monitor

The diagram below shows the preferred setup for sending video to an external television monitor.

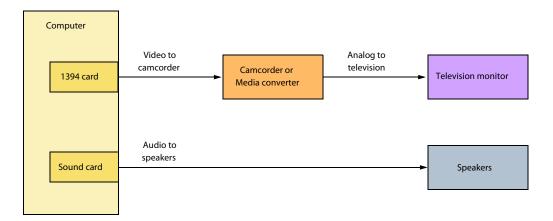

The video conforms to DV format and feeds through the 1394 card to the DV device (camcorder or DV-to-analog media converter). The DV device sends analog output to the television monitor.

**Note:** The DV device must support pass-through in order to use an external monitor. Some PAL camcorders do not support this feature.

## Configuring an external monitor

- 1. Connect your camera to the IEEE-1394 card and turn it on in VTR mode.
- 2. Run DVD Architect software.
- 3. From the Options menu, choose Preferences.
- 4. Click the Video Device tab.
- **5.** Select your device from the **Device** list (e.g., OHCl Compliant IEEE-1394/DV).

The output is directed to the camcorder through the IEEE-1394 card. You can preview this output on the camcorder's LCD screen or connect the camera to a television monitor to preview the output there. Once you have verified that the external monitor settings are working correctly, you can use it to preview your project.


# **Chapter 13**: Preparing and Burning Your DVD

Once you've finished building your project using DVD Architect™ software and are satisfied with the results you see after previewing, then you're ready to begin the final stage: preparing and burning your DVD project.

# Preparing your project

During the prepare process, DVD Architect software develops the files and structure necessary to burn your DVD, without actually starting the burning process.

1. Click the Make DVD button 🐞 . The Make DVD wizard is displayed.



- 2. Click the Prepare button. The Select Prepare Folder page is displayed.
- 3. In the Prepare/Burn folder box, type the path to the folder where you want to prepare your project, or click Browse to choose a folder.

Note: You can only prepare to a folder that is empty or a folder that you have previously prepared to.

- 4. If you've previously prepared the project, the Smart prepare section will display the estimated percentage of the project that has not been changed, which can be reused. If you want to turn off smart prepare and prepare the entire project, perform the following steps:
  - **a.** Click the **Advanced** button. The Smart Prepare Options dialog is displayed.
  - **b.** Clear the **Enable smart prepare** check box.
  - c. Click the OK button to continue.

**Tip:** Smart prepare technology can drastically reduce project preparation times if you need to edit a portion of your project. When you reprepare your project, only the portions of the project that have changed will be prepared.

- 5. Click Next.
- 6. The files in your project are analyzed to ensure that they are ready for burning and a message list is displayed with the results. You can also view the final size of your project.
  - a. Review the messages and make any necessary adjustments.

Message Type		Description
0	Informational	Produces a valid DVD and does not require any action.
•	Warning	Produces a valid DVD and does not require any action.
1	Error	Produces an invalid DVD and must be resolved.

- **b.** Click the **Optimize** button to display the Optimize DVD dialog where you can make changes to individual media file and project settings (often allowing you to resolve warnings or errors). For more information, see Optimizing your project on page 34.
- 7. Click the Next button.
- **8.** The subtitle and menu highlight mask files in your project are analyzed to ensure that they are ready for burning and a message list is displayed with the results. Review the messages and make any necessary adjustments.
- 9. Click the Finish button. Your project is rendered to the folder you specified.
- **10.** The application displays a dialog box indicating that the prepare completed successfully; click the **OK** button to continue.

# **Burning your projects**

DVD Architect allows you to burn current projects, previously prepared projects, or previously mastered projects onto DVD. For information on preparing a project for burning, see Preparing your project on page 141.

**Warning:** If you have a display device that is susceptible to burn-in (such as a rear-projection television), do not use static text or bright static graphics in any scene that will be displayed on screen for an extended period of time.

- 1. Click the Make DVD button 🐞 . The Make DVD wizard is displayed.
- 2. Click the Burn button. The Select Prepare Folder page is displayed.
- **3.** Choose the location where you want to prepare your project or the location of an already-prepared or mastered project that you want to burn.

**Note:** You can only prepare to a folder that is empty or a folder that you have previously prepared to.

Option	Description
Current project	Select the <b>Current project</b> radio button and type the path to the folder where you want to prepare your project in the <b>Prepare/Burn folder</b> box (or click <b>Browse</b> to choose a folder).
	If you've previously prepared the project, the Smart prepare section will display the estimated percentage of the project that has not been changed, which can be reused. If you want to turn off smart prepare and prepare the entire project, perform the following steps:
	1. Click the <b>Advanced</b> button. The Smart Prepare Options dialog is displayed.
	2. Clear the Enable smart prepare check box.
	3. Click the <b>OK</b> button to continue.
	<b>Tip</b> : Smart prepare technology can drastically reduce project preparation times if you need to edit a portion of your project. When you reprepare your project, only the portions of the project that have changed will be prepared.
Previously prepared folder	Select the <b>Previously prepared folder</b> radio button and type the path to the folder that contains a prepared project in the <b>Prepared folder</b> box (or click <b>Browse</b> to choose a folder).
Previously mastered folder	Select the <b>Previously mastered folder</b> radio button to burn a previously mastered project. Type the path to the folder that contains a previously mastered project in the <b>Mastered folder</b> box (or click <b>Browse</b> to choose a folder).

- 4. Click the Next button.
- **5.** If you selected the **Current project** radio button in step 3, DVD Architect software displays a list of messages about your project and estimates the project's final size on the Review Message List page.
  - **a.** Review the messages and make any necessary adjustments.

Message Type		Description
0	Informational	Produces a valid DVD and does not require any action.
•	Warning	Produces a valid DVD and does not require any action.

Message Type	Description
Error	Produces an invalid DVD and must be resolved.

- b. Click the Optimize button to display the Optimize DVD dialog where you can make changes to individual media files and project settings (often allowing you to resolve warnings or errors). For more information, see Optimizing your project on page 34.
- 6. Click the Next button.
- 7. Select the burn parameters:
  - **a.** In the **Volume name** box, type the name of your disc.
  - **b.** From the **Device** drop-down list, choose your DVD burner or **ISO Image Writer**.
  - **c.** Perform one of the following actions:

If	Then
You chose your DVD burner	In the <b>Speed</b> drop-down list, choose your burning speed.
You chose ISO Image Writer	In the <b>File name</b> field, click the button to browse to the location where you would like to save the file.

- d. Select the Advanced button for the Drive Info, Media Info, and Labels tabs. Drive Info lists information about the drive to which the DVD will be burned. Media Info lists information about the type of media currently in your DVD burner. The Labels tab has information about the volume name, volume set name, and application ID, which you can adjust, if necessary.
- e. If you're using a -RW disc, then you can select one of the Erase mode radio buttons to erase the disc before burning.

Option	Description
Do not erase	Does not erase the contents of the
	disc.
Quick erase	Erases only the table of contents.
Full erase	Erases all data from the disc.

f. Select the Burn DVD radio button if you want to burn your project, or select the Test only button to perform a test burn without activating your burner's laser.

**Note:** Test burns are not available with single- or dual-layer discs using +R/+RW media.

- 8. Click the Finish button to start burning.
- 9. When burning a previously mastered folder, after clicking the Finish button, click Continue to burn the next mastered layer.

**Note:** When burning a dual-layer mastered project, each layer must be burned to separate discs. You cannot burn both layers to one dual-layer disc.

- 10. If you are preparing and mastering a dual-layer disc, the Choose Layer Break Behavior page is displayed to allow you to choose if you want to choose a layer break or if you would like the software to choose a break for you.
  - a. Select one of the following options:

Option	Description
Choose a layer break point automatically	The software will choose a layer break for you.
Prompt me to choose a layer break point only if the break must be placed within a title	After the project is prepared, the software will interrupt the mastering process to prompt you to choose a layer break point if a break point cannot be placed at the beginning of a title.
Prompt me to choose the layer break point	After the project is prepared, the software will interrupt the mastering process to prompt you to choose a layer break point.

**b.** Click the **Finish** button. DVD Architect software prepares the project.

11. If you are burning a dual-layer disc from a prepared project, the Select Layer Break page is displayed to assist you with where to place the layer break.

#### Notes:

- All media after the selected layer break will be placed on the second layer.
- If you're preparing and mastering, the Select Layer Break page will be displayed only if you did not choose the Choose a layer break point automatically radio button in step 10 or if the software is unable to find a preferred layer break point.
- a. At the top of the page, select a setting from the drop-down list to indicate whether you want the preferred layer break points or all available layer break points to be displayed. Break points are determined by chapters in your titles:
- A preferred layer break point occurs at the beginning of a title. These chapter markers are preferred because they will not result in a visible pause when the DVD player changes layers.
- If no preferred layer break points are available, you can choose to display all possible layer break points. If you choose a nonpreferred break point, viewers may notice a pause when the DVD player changes layers.
- If no layer break points are available, you can close the wizard and add a chapter marker manually. The wizard will suggest a title and approximate location.
- If layer break points are not available in suitable locations, try rearranging the titles in the Project Overview window. By changing the title order, you may be able to achieve that layer break at a more desirable location.
- **b.** Select the layer break point that you want to use.
- **12.** The application displays a dialog box prompting you to burn another disc. For more information, see Burning multiple copies on page 145.

#### Burning 8 cm discs to 12 cm discs

You can burn a camcorder-prepared DVD (8 cm disc) onto a standard DVD (12 cm disc) using DVD Architect. Connect the camcorder via the USB port to the computer and insert a writable DVD into your DVD drive.

**Note:** To locate the camcorder's USB connection, please review the camcorder's user instructions.

- 1. Click the Make DVD button 🐞 . The Make DVD wizard is displayed.
- 2. Click the Burn button. The Select Prepare Folder page is displayed.
- 3. Select the Previously prepared folder radio button and click Browse to choose the USB drive.

**Note:** The DVD must be finalized in the camcorder before the disc can be copied.

4. Click the Next button.

- **5.** Select the burn parameters:
  - a. In the Volume name box, type the name of your disc.
  - **b.** From the **Device** drop-down list, choose your DVD burner or **ISO Image Writer**.
  - **c.** Perform one of the following actions:

lf	Then
You chose your DVD burner	In the <b>Speed</b> drop-down list, choose your burning speed.
You chose ISO Image Writer	In the <b>File name</b> field, click the button to browse to the location where you would like to save the file.

- d. Select the Advanced button for the Drive Info, Media Info, and Labels tabs. Drive Info lists information about the drive to which the DVD will be burned. Media Info lists information about the type of media currently in your DVD burner. The Labels tab has information about the volume name, volume set name, and application ID, which you can adjust, if necessary.
- e. Select the Burn DVD radio button if you want to burn your project, or select the Test only button to perform a test burn without activating your burner's laser.
- **f.** Select the **Eject disc when done** box so the DVD drive will open when the burn is completed.
- 6. Click the Finish button to start burning.
- 7. The application displays a dialog box prompting you to burn another disc. For more information, see Burning multiple copies on page 145.

For more information, see Burning your projects on page 142.

#### **Burning multiple copies**

If you want to burn multiple copies of your project, the application will prompt you to burn another copy after each disc has completed burning.

- Click the Yes button to burn another copy. The application displays the Make DVD Select Burn Parameters page where you can begin the process again.
- Click the **No** button if you do not want to burn another copy of your project.

### Writing a disc master

DVD Architect software allows you to create a disc master for replication.

Warning: If you have a display device that is susceptible to burn-in (such as a rear-projection television), do not use static text or bright static graphics in any scene that will be displayed on screen for an extended period of time.

- 1. Click the Make DVD button 🐞 . The Make DVD wizard is displayed.
- Click the Write Master button.
- 3. On the Select Prepare Folder page, choose the location where you want to prepare your project or the location of an already-prepared project that you want to burn.

**Note:** You can only prepare to a folder that is empty or a folder that you have previously prepared to.

Option	Description
Current project	Select the <b>Current project</b> radio button and type the path to the folder where you want to prepare your project in the <b>Prepare/Burn folder</b> box (or click <b>Browse</b> to choose a folder).
	If you've previously prepared the project, the Smart prepare section will display the estimated percentage of the project that has not been changed, which can be reused. If you want to turn off smart prepare and prepare the entire project, perform the following steps:
	1. Click the <b>Advanced</b> button. The Smart Prepare Options dialog is displayed.
	2. Clear the Enable smart prepare check box.
	3. Click the <b>OK</b> button to continue.
	<b>Tip:</b> Smart prepare technology can drastically reduce project preparation times if you need to edit a portion of your project. When you reprepare your project, only the portions of the project that have changed will be prepared.
Previously prepared folder	Select the <b>Previously prepared folder</b> radio button and type the path to the folder that contains a prepared project in the <b>Prepared folder</b> box (or click <b>Browse</b> to choose a folder).

- **4.** Click the **Next** button.
- 5. If you selected the **Current project** radio button in step 3, DVD Architect software displays a list of messages about your project and estimates the project's final size on the Review Message List page.
  - a. Review the messages and make any necessary adjustments.

Message Type		Description
0	Informational	Produces a valid DVD and does not require any action.
•	Warning	Produces a valid DVD and does not require any action.
!	Error	Produces an invalid DVD and must be resolved.

- **b.** Click the **Optimize** button to display the Optimize DVD dialog where you can make changes to individual media file and project settings (often allowing you to resolve warnings or errors). For more information, see Optimizing your project on page 34.
- **6.** Click the **Next** button.
- 7. On the Update Mastering Properties page, you can choose to update the settings from the Project Properties dialog.
  - **a.** Click the **Copy Protection** button at the top of the dialog and choose your copy protection settings. *For more information, see Copy protection on page 30*.
  - **b.** Click the **Regions** button at the top of the dialog and choose the region settings for your disc. *For more information, see Regions on page 31*.

**Note:** Region information is not encoded on DVDs you burn with DVD Architect software; the software sets a region flag that is encoded by a replication facility.

- **c.** Click the **Mastering** button at the top of the dialog and choose your mastering settings. For more information, see *Mastering on page 32*.
- 8. Click the **Next** button.
- 9. On the Select Mastering Output Parameters page, choose your mastering settings:
  - a. In the Volume name box, type the name of your disc.
  - **b.** From the **Device** drop-down list, choose your hard drive or your DLT (digital linear tape) drive.
  - **c.** If you're saving your master to a file on disk, type the path to the folder you want to use, or click the **Browse** button to choose a folder.

d. If you selected your DLT drive from the Device drop-down list and need to erase the tape, select the Erase first, then write to tape check box. A dialog box confirming that you want to erase the tape is displayed; click the Yes or **No** button to continue.

**Note:** Erasing the tape may take a long time and oftentimes cannot be canceled.

- e. Click the Next button.
- 10. If you are preparing and mastering a dual-layer disc, the Choose Layer Break Behavior page is displayed to allow you to choose if you want to choose a layer break or if you would like the software to choose a break for you.
  - a. Select one of the following options:

Option	Description
Choose a layer break point automatically	The software will choose a layer break for you.
Prompt me to choose a layer break point only if the break must be placed within a title	After the project is prepared, the software will interrupt the mastering process to prompt you to choose a layer break point if a break point cannot be placed at the beginning of a title.
Prompt me to choose the layer break point	After the project is prepared, the software will interrupt the mastering process to prompt you to choose a layer break point.

- **b.** Click the **Finish** button. DVD Architect software prepares the project.
- 11. If you are mastering a dual-layer disc from a prepared project, the Select Layer Break page is displayed to assist you with where to place the layer break.

#### Notes:

- All media after the selected layer break will be placed on the second layer.
- If you're preparing and mastering, the Select Layer Break page will be displayed only if you did not choose the Choose a layer break point automatically radio button in step 10 or if the software is unable to find a preferred layer break point.
  - a. At the top of the page, select a setting from the drop-down list to indicate whether you want the preferred layer break points or all available layer break points to be displayed. Break points are determined by chapters in your titles:
  - A preferred layer break point occurs at the beginning of a title. These chapter markers are preferred because they will not result in a visible pause when the DVD player changes layers.
  - If no preferred layer break points are available, you can choose to display all possible layer break points. If you choose a nonpreferred break point, viewers may notice a pause when the DVD player changes layers.
  - If no layer break points are available, you can close the wizard and add a chapter marker manually. The wizard will suggest a title and approximate location.
  - If layer break points are not available in suitable locations, try rearranging the titles in the Project Overview window. By changing the title order, you may be able to achieve that layer break at a more desirable location.
  - **b.** Select the layer break point that you want to use.
- 12. Click the Finish button to start preparing, if necessary, and writing your mastering files.
- 13. The application displays a dialog box indicating that the mastering completed successfully; click the OK button to continue.

# **Chapter 14** Customizing DVD Architect Software

You can customize the DVD Architect™ software to suit your project needs and working preferences. In this chapter, you will find information about functions that allow you to customize the appearance of DVD Architect software and set the application's preferences.

# Changing grid settings

The workspace's grid allows you to arrange and align objects on your menus more precisely. You can also customize the grid's properties, such as color, size, or position.

To view or change grid settings, choose Grid Settings from the Options menu. The Grid Settings dialog is displayed. The items on this dialog are explained below.

Tip: If you will use the same grid settings on most projects, select the Start all new projects with these settings check box at the bottom of the Grid Settings dialog.

Setting	Description
Width	Sets the width of grid squares.
Height	Sets the height of grid squares.
X offset	Sets the horizontal center offset for the placement of the grid.
Y offset	Sets the vertical center offset for the placement of the grid.
Lock sizes	Locks the grid size so the height and width are equal.
Color	Sets the red, green, blue, and alpha channels for your grid.
Start all new projects	Use the grid settings you have specified whenever a new project
with these settings	is created.
Show grid	Displays the grid in the workspace.

# Using the toolbar

The main toolbar is automatically displayed below the menu bar. However, you may hide and customize the toolbar to suit your preferences. The settings that you apply to the toolbar remain set until you change them again.

#### Hiding and displaying the toolbar

If you prefer to use shortcut keys when working with your project, you may hide the toolbar to create more workspace. Choose Toolbar from the View menu to hide it. The check mark next to the command is removed and the toolbar disappears. The toolbar remains hidden until you choose Toolbar from the View menu to display it again.

#### Reordering toolbar buttons

The main toolbar's button order may be changed to suit your preferences. You can reorder the buttons via the Customize Toolbar dialog.

The Customize Toolbar dialog allows you to control the order and functionality available on the main toolbar. You may return the toolbar to its default settings by clicking the Reset button.

1. From the Options menu, choose Customize Toolbar. The Customize Toolbar dialog is displayed.




- 2. In the Current toolbar buttons list, select the button that you want to move and click the Move Up or Move Down button.
- 3. Click Close to save the toolbar changes and close the dialog.

#### Adding buttons to the toolbar

A series of buttons are available that you may add to the main toolbar. These buttons are listed in the Customize Toolbar dialog. You may also add separators on the toolbar to organize the buttons to suit your preferences.

You may return the toolbar to its default settings by clicking the Reset button on the dialog.

- 1. From the Options menu, choose Customize Toolbar. The Customize Toolbar dialog is displayed.
- 2. In the Available toolbar buttons list, use the scroll bars to locate the button that you want to add, and then select it.
- 3. On the Current toolbar buttons pane, select the button that you want the newly added button to proceed in order. For example, if you want to add the Insert Media button and want it to precede the Enable Snapping button, select the Enable Snapping button in the Current toolbar buttons list.

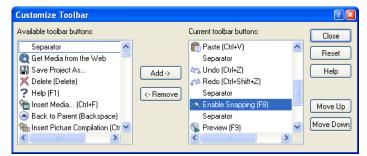

4. Click the Add button. The new button is added above the selected button in the Current toolbar buttons list.

**Tip:** You may also double-click a button to add it to the toolbar.

5. Click Close to save the toolbar settings and close the dialog.

#### Removing buttons from the toolbar

You may remove buttons and separators from the main toolbar. If you have added buttons to the toolbar, removing unused or unwanted buttons allows you to maximize the toolbar's space. You can remove toolbar buttons via the Customize Toolbar dialog.

You may return the toolbar to its default settings by clicking the **Reset** button on this dialog.

- 1. From the Options menu, choose Customize Toolbar. The Customize Toolbar dialog is displayed.
- 2. On the Current toolbar buttons pane, select the button that you want to remove.

3. Click Remove. The button is removed from the Current toolbar buttons pane and will not appear on the toolbar.

**Tip:** You may also double-click a button to remove it.

**4.** Click **Close** to save the toolbar settings and exit the dialog.

## **Setting DVD Architect software preferences**

The preferences options are different from project properties. Project properties are unique to each project, while preferences affect how the software functions. Any changes that you make to the preferences remain set until you change them again or reset to use the default presets.

You can access the Preferences dialog by choosing Preferences from the Options menu. This dialog contains six tabbed pages: General, Video, Video Device, Editing, Display, Preview, Burning, and Mastering. The following sections explain the settings on each tab.

#### General tab

The General tab includes a variety of settings and allows you to specify general user options.

Preference	Description
Show logo splash screen on	Select this check box to briefly show the DVD Architect software
startup	logo while the program is loading. The logo does not increase
	loading time.
Use Microsoft DV Reader	Select this check box to use the Microsoft DV codec for displaying and rendering DV. This option can help resolve problems viewing DV.
Double-clicking files in Explorer reapplies theme layout	Select this check box to automatically realign objects according to the current theme when you double-click media files in the Explorer window: the new file is added, and the objects are realigned on the menu.
	When the check box is cleared, the media files are added to the menu and existing object positions are preserved.
Use best stretching algorithm during rendering	Select this check box if you want bi-cubic stretching to be used during rendering. This setting produces higher-quality images, but rendering time is increased.
	When the check box is cleared, bi-linear stretching is used.
Automatically open last project on startup	When check box is selected, the last project that was open when you exited will reopen.
Media goes offline on loss of focus	When this check box is selected, media files are released when DVD Architect software does not have focus. The files will be reloaded when you switch back to DVD Architect software.
Multimedia keyboard support	Select this check box to use a multimedia keyboard to control playback of a project.
Disable pop-up animations	Select this check box to turn off the animation applied to text boxes when you edit text. This animation helps you locate which text box you're editing.
Automatically link similar audio and video files	Select this check box if you want the software to look for and link audio files with the same base name when you add a video-only file to your project.
	For example, if you had a video-only MPEG file (MyProject.mpg) and an audio file (MyProject.wav) in the same folder, MyProject.wav will automatically be used as the audio track when you add MyProject.mpg to a menu.
	Clear the check box if you want to add your audio files manually.
Skip drive database; autodetect drive capabilities	When the check box is cleared, an internal configuration file will be used to determine your drive's capabilities.
	If you encounter problems burning DVDs, select this check box, and your drive will be tested to determine its capabilities.

Preference	Description
Disable screen saver during preview	Select this check box if you want to suspend your screen saver when you're previewing your project.
Double-clicking themes applies	Select this check box if you want to apply a theme to all pages in a
them to all pages of a menu	menu when you double-click a theme in the Themes tab.
	When the check box is cleared, the theme is applied to the current page only.
Automatically name markers	Select this check box if you want DVD Architect software to
	automatically assign names to markers when you add them to videos. When the check box is cleared, an edit box is displayed
	after you add a marker. For more information, see Inserting a
	scene selection menu on page 50.
Display filename labels on	Select this check box if you want to display the names of source
media events in timeline	files for audio and video events in the Timeline window.
Enable Windows XP Theme support	When this check box is selected, the DVD Architect window will inherit the appearance of the current theme when using Windows XP.
	When the check box is cleared, user interface elements will maintain the classic Windows appearance.
Allow pulldown removal when opening 24p DV	Select this check box if you want to remove pulldown when you open 24 fps progressive-scan DV video files.
	When the check box is cleared, 24p video is read as 29.97 fps interlaced video (60i).
Automatically detect plug-and- play CD/DVD drives	Select this check box if you want to automatically detect the presence of plug-and-play CD/DVD drives when you connect them to your computer.
	When this check box is cleared, you will need to close and reopen DVD Architect to detect newly connected drives.
Always estimate maximum size	When this check box is selected, DVD Architect will estimate the maximum possible size when calculating available disc space for your project.
	When the check box is cleared, DVD Architect will use the standard estimation method, which provides more accurate results.
Recently used project list	Select the check box and enter a number in the edit box if you want to list your most recently used projects at the bottom of the File menu.
Default All	Restores the General page to the default settings.

#### Video tab

The Video tab allows you to choose the graphics editor that you want to use when you choose to edit a graphic in your DVD Architect project.

The **Preferred graphics editor** box displays the path to the application that will be used. Click the **Browse** button to choose a different application, or click the **Clear** button to remove the associated application.

**Note:** When the **Preferred graphics editor box** is empty, DVD Architect software will use the application associated with the file type when you right-click a graphic and choose **Open in graphics editor** from the shortcut menu.

## Video Device tab

This Video Device tab allows you to configure an external monitor. Your video will be sent to this device when you choose Preview on External Monitor from the Options menu or click the Preview on External Monitor button 🏮 in the Video Preview window.

Preference	Description
Device	Choose a device from the drop-down list to indicate where your monitor is connected.
Details	Displays information regarding the capture card specified in the Device drop-down list.
Format	To simulate the letterboxing that a is displayed when widescreen content is played on a 4:3 screen, choose NTSC DV or PAL DV instead of a widescreen setting, Widescreen frames will automatically be letterboxed by the external monitor driver for a 4:3 display. As you switch between 4:3 and 16:9 material, letterboxes will be added as needed.
	To simulate anamorphic widescreen output from a DVD player to a widescreen display, choose NTSC DV Widescreen or PAL DV Widescreen. Note that the video device driver does not switch aspect ratios, so 4:3 material will be shown as widescreen output with pillarboxing on the sides. The same content on a widescreen enabled DVD player and display would auto-switch between 16:9 and 4:3 display if both devices supported widescreen signaling.
Default All	Restores the Video Device page to the default settings.

# **Editing tab**

The Editing tab allows you to specify options for editing your project.

Preference	Description
Action safe area (%)	Allows you to specify a percentage for the border size in the video's safe area. Video within this safe area will always be visible on a television monitor.
	The Safe Action borders are displayed when you choose Show Action Safe Area from the Options menu.
Title safe area (%)	Allows you to specify a percentage for the border size in the video's safe title area. Video within this safe area will always be visible on a television monitor.
	The Safe Title borders are displayed when you choose Show Title Safe Area from the Options menu.
Paste offset	Type values in the <b>X</b> and <b>Y</b> boxes if you want to offset items when you paste them. If you enter 0 in both boxes, objects will be pasted directly over the source object when you copy and paste in the same menu.
Brightness/contrast modifier (%)	Allows you to control how much brightness/contrast is added or subtracted when you click on the increase/decrease contrast, increase/decrease brightness and increase/decrease contrast center buttons.
Limit number of undo buffers to (0 to 9999)	Select this check box and type a number in the box if you want to limit the number of undo buffers that will be created. Reducing the number of undo buffers can conserve memory.
Default All	Restores the Editing page to the default settings.

# Display tab

The Display tab allows you to specify options for the appearance of the DVD Architect workspace.

Preference	Description
Icon color saturation	Drag the slider to adjust the color intensity of icons in the DVD Architect window. Drag to the left to decrease the color saturation, or drag to the right to increase it.
Icon color tint	Drag the slider to adjust the amount of tinting that is applied to the icons in the DVD Architect window. Drag the slider to the right to add an average of the Windows title bar colors to the icons. Drag to the left to decrease the amount of tinting applied.
	Tip: You can use the Display Properties control panel to change your active window title bar colors. In Windows 2000, open the Display Properties control panel and select the Appearance tab. Then choose Active Title Bar from the <b>Item</b> drop-down list. In Windows XP, open the Display Properties control panel and select the Appearance tab. Then click the Advanced button and choose Active Title Bar from the <b>Item</b> drop-down list.
Selected item color	Click to display a color picker, where you can set the color for selected items in the workspace using red, green, blue, and alpha values.
Default All	Restores the Display page to the default settings.

#### Preview tab

The Preview tab allows you to specify options for previewing your projects.

Preference	Description
Fast forward/rewind amount	Type a value in the box to specify how far playback will be
	advanced/reversed when you click the >>> and < buttons
	while previewing your project.
Super fast forward/rewind	Type a value in the box to specify how far playback will be
amount	advanced/reversed when you click the by and the buttons
	while previewing your project.
Region	Choose a region code from the drop-down list to indicate the
	region to be used during project previews.
Aspect Ratio	Choose an aspect ratio from the drop-down list to indicate
	whether your project should be previewed in standard (4:3) or
	widescreen (16:9) format by default.
Parental Level	Choose a parental management level from the drop-down list to
	simulate for project previews.
Menu	Choose a menu language from the drop-down list to specify the
	default language for your DVD menus while previewing your
	project.
Audio	Choose an audio language from the drop-down list to specify the
	default language for your audio tracks while previewing your
	project.
Subtitles	Choose a subtitle language from the drop-down list to specify the
	default language for subtitles while previewing your project.
Default All	Restores the Preview page to the default settings.

## **Burning tab**

The Burning tab allows you to specify options for project preparation and burning.

Preference	Description
Free space display type	Choose a setting from the drop-down list to choose how your project size is represented in the bottom-right corner of the window (as Disc Space Used).

Preference	Description
Default prepare folder	Displays the path to the folder where DVD Architect software will prepare your project. Click the Browse button to choose a different folder.
Temporary files folder	Displays the path to the folder where DVD Architect software will store temporary files it creates. Click the Browse button to choose a different folder.
Minimum video bitrate	Allows you to specify the minimum allowed bitrate that will be used when DVD Architect software compresses the selected video.
Default All	Restores the Burning page to the default settings.

# Mastering tab

The Mastering tab allows you to specify options for project preparation and mastering.

Preference	Description
Mastering output folder	Displays the path to the folder where DVD Architect software will master your project output. Click the Browse button to choose a different folder.
Default All	Restores the Mastering page to the default settings.

# **Appendix A** Shortcuts

# **Keyboard shortcuts**

# **Project file**

Press	Result
Ctrl+N	Create a new project.
Ctrl+O	Open an existing project.
Ctrl+S	Save modified project back to the file.
Alt+Enter	Display the Project Properties dialog.
Alt+F4	Exit the application.

# Magnification and view

Press	Result	
Alt+0	Set input focus to the workspace.	
Alt+1	Show/hide editing toolbar.	
Alt+2	Show/hide text toolbar.	
Alt+3	Show/hide Explorer window.	
Alt+4	Show/hide Themes window.	
Alt+5	Show/hide Buttons window.	
Alt+6	Show/hide Backgrounds window.	
Alt+7	Show/hide Compilation window.	
Alt+8	Show/hide Properties window.	
Alt+9	Show/hide Timeline window.	
Ctrl+Alt+1	Show/hide Project Overview window.	
F11	Show/hide bottom panel.	
Shift+F11	Show/hide side panel.	
Ctrl+G	Show/hide grid.	
Ctrl+B	Show/hide button masks.	
Home/End	Show first/last page.	
Page Up/Page Down	Show previous/next page.	

# **General editing**

Press	Result
Ctrl+Z	Undo last action.
Ctrl+Shift+Z	Redo last action.
Ctrl+X	Cut
Ctrl+C	Сору
Ctrl+V	Paste
Delete	Delete
Ctrl+A	Select All
F2	Edit selected text.
Ctrl+Home/End	Move object to top/bottom.
Ctrl+Page Up/Page Down	Move object forward/back.
Up Arrow/Down Arrow	Select object above/below.
Left Arrow/Right Arrow	Select object left/right.
Alt+Up Arrow/Down Arrow	Move selected objects up/down by grid spacing.
Alt+Right Arrow/Left Arrow	Move selected objects right/left by grid spacing.

Alt+Page Up/Page Down  Alt+Home/End  Move selected objects to top/bottom of menu.  D  Toggle Selection/Sizing tool.  Ctrl+D  Selection tool  Ctrl+Shift+G  Edit grid settings.  F8  Enable snapping.  Ctrl+F8  Snap to grid.  Shift+F8  Snap to safe areas.	Press	Result	
D Toggle Selection/Sizing tool.  Ctrl+D Selection tool  Ctrl+Shift+G Edit grid settings.  F8 Enable snapping.  Ctrl+F8 Snap to grid.  Shift+F8 Snap to objects.	Alt+Page Up/Page Down	Move selected objects to top/bottom of menu.	
Ctrl+D Selection tool Ctrl+Shift+G Edit grid settings. F8 Enable snapping. Ctrl+F8 Snap to grid. Shift+F8 Snap to objects.	Alt+Home/End	Move selected objects to right/left of menu.	
Ctrl+Shift+G Edit grid settings.  F8 Enable snapping.  Ctrl+F8 Snap to grid.  Shift+F8 Snap to objects.	D	Toggle Selection/Sizing tool.	
F8 Enable snapping.  Ctrl+F8 Snap to grid.  Shift+F8 Snap to objects.	Ctrl+D	Selection tool	
Ctrl+F8 Snap to grid. Shift+F8 Snap to objects.	Ctrl+Shift+G	Edit grid settings.	
Shift+F8 Snap to objects.	F8	Enable snapping.	
Shap to objects.	Ctrl+F8	Snap to grid.	
Ctrl+Shift+F8 Snap to safe areas.	Shift+F8	Snap to objects.	
	Ctrl+Shift+F8	Snap to safe areas.	

# Inserting objects and titles

Press	Result
Ctrl+T	Insert text.
Ctrl+M	Insert submenu.
Ctrl+L	Insert picture compilation.
Ctrl+K	Insert music compilation.
Ctrl+F	Insert media.

#### **Timeline window**

Press	Result
Arrow Up/Arrow Down	Zoom in/out.
Home/End	Move cursor to set in/out point.
Ctrl+Home/End	Move cursor to beginning/end of timeline.
Alt+Home/End	Move cursor to beginning/end of viewable area of timeline (when zoomed in).
Left Arrow/Right Arrow	Move cursor left/right.
Space	Move one frame left/right.
Shift+Space	Preview current title in workspace starting at the set in point.
M	Insert chapter.
I/O	Set in/out points.
L	Set loop point.
Ctrl+Q	Insert audio track.
Ctrl+Shift+Q	Insert video track.
Ctrl+Alt+Q	Insert subtitle track.
Ctrl+Shift+T	Insert subtitle text on active track and make subtitle text editable.
Т	Insert subtitle text on all selected tracks without editing text.

#### Preview

Press	Result
Up Arrow/Down Arrow or Prev Track/Next Track (Windows multimedia keyboard only)	Previous/next chapter or page.
Ctrl+Left Arrow/Right Arrow	Fast forward/reverse.
Ctrl+Left Arrow/Right Arrow	Super fast forward/reverse.
F9	Preview current title in Preview window starting at the timeline cursor position.
Ctrl+F9	Preview disc in Preview window.
Space	Preview current title in Preview window starting at the timeline cursor position.
Shift+Space	Preview current title in workspace starting at the set in point.

# **Mouse shortcuts**

Press	Result
Ctrl+drag object	Copy object.
Shift+drag object	Override snapping.
Alt+drag object	Constrain motion horizontally or vertically.
Ctrl+drag edge of object with sizing tool	Resize object from center.
Shift+drag edge of object with sizing tool	Resize proportionally.
Ctrl+Shift+drag edge of object with sizing tool	Resize object proportionally from center.

# Index

A	Burning
AC-3 audio, 23	ISO Image Writer, 142 preferences, 154
Action safe area, 67	your DVD, 141
Adding a scene selection menu, 50 audio to music compilation, 76 audio tracks, 107 buttons, 53	your project, 142  Button colors activated, 42, 71 inactive, 42, 71 selected, 42, 71
files to project, 27 media, 46 music compilation to menu, 46 pages to menu, 40 single-movie object to menu, 46 submenus to project, 39	Button properties, 67 Action, 68  Buttons adding, 53 adding to videos, 102 animating keyframes, 104
Adding an existing script to a menu or title, 130	choosing color sets,45 editing,67
Adding buttons to videos, 102	editing, 67 editing order for a video, 103
Adding keyframes, 59  Adjusting audio recompression settings, 36 object spacing, 66 project-wide settings, 37	highlighting, 70 navigation, 73 Navigation tool, 73 properties, 67 buttons on video, 97
video recompression settings, 35	Buttons on video markers, 98
Aligning objects, 65	Buttons window, 18
Animating buttons with keyframes, 104	,
Animation, 62	С
Appending a statement to a script, 130	Centering objects, 66
Applying a highlight mask, 43 color sets, 54 themes, 123	Changing menu background media, 42 menu page order, 41 object's size, 55 picture compilation thumbnail size, 88
Applying themes, 124	position of object, 62
Arranging objects, 61	Changing interpolation curves between keyframes, 59
Audio adding to a music compilation, 76 adjusting recompression, 36	Chapter markers inserting, 98
Audio file	Chapter number, 134
music compilation, 76	Choosing color sets for buttons, 45
Audio track number, 134	Choosing media files, 25
Audio tracks, 107 adding, 107 changing track colors, 108 replacing, 107	Cinescore, 116 Editing existing soundtracks, 116 Generating soundtracks, 116
setting for timeline playback, 108  Automatically aligning objects based on current theme, 65	Color sets, 54 applying, 54 editing, 54
В	editing subtitle event, 114
Backgrounds window, 18	Command types GotoLabel, 131 Link, 131

LinkGPRM, 132	objects, 66
Nop, 131 Resume, 132	pages from menu, 40
SetGPRM, 131	Deleting a script, 134
SetModeGPRM, 132	Deleting keyframes, 59
SetStreams, 132 Compilation	Deleting text,78 from compilation,87
adding images, 83	Downloading media files from Web, 26
adding text, 87	DVD
adding to menu,46 deleting text,87	burning, 141
formatting text, 87	menu-based, 39
inserting audio, 88	music compilation,75 picture compilation,83
inserting empty slide, 86 inserting graphic, 87	preparing, 141
moving text, 87	setting introduction media, 27
replacing images, 84	setting start item, 27
rotating images, 85	single movie, 97
thumbnail display, 88	DVD Scripts, 22, 129
Compilation window, 19	DVD start script, 134
Conditions for scripts, 132	E
Configuring external monitor, 139	
Copying and pasting settings from project to project, 72	Edit source project, 37
Copying subtitle event formatting, 114	Editing button properties, 67
Country code for parental management, 134	color sets, 54
Creating a graphic subtitle, 111	formatting text, 49
Creating a scene selection menu, 50	menus, 41 preferences, 153, 154
Creating a script, 130	subtitle event color set, 114
Creating subtitles from regions, 112	text, 48
Crop and video effects keyframes, 58	Editing a command, 131
Custom masks, 117	Editing a script's statements in the Script Properties window, 131
creating, 117 frame, 118	Editing button order ro a video, 103
highlight, 119	Editing comments, 133
thumbnail, 117	Editing crop settings, 60
Custom menus, 117 creating layered .psd menu, 121	Editing existing soundtracks with Cinescore, 116
reapplying layout, 40	Editing labels in scripts, 132
using layered graphics, 120 using single-layered graphics, 122	Editing text, 49
Custom themes, 117	Editing toolbar, 16
creating, 124	Empty slide
Customizing DVD Architect, 149	inserting, 86
grid settings, 149	End actions, 44
Preferences, 153, 154, 155 preferences, 151	Event
toolbar, 149	subtitle, 113
D	Explorer views, 26
Debugging scripts, 133	Explorer window, 17
Deleting markers, 99	Exporting menu as theme, 125 applying grid theme, 126

First play media, 27 flicker reduction, 41, 79, 88, 100  Formatting subtitle event, 114 text, 48, 49, 77 text in compilation, 87  Frame masks, 118  General preferences, 151 General Purpose Register Memories (GPRM), 134 Generating music with Cinescore, 116 Generating slideshow animation, 84 Generating soundtracks, 116 GotoLabel command type, 131 Graphic inserting, 47, 87, 88 Graphics Properties, 47 Grid Grid Smapping to, 67 Grid layout properties, 127  Initial audio I Initial audio	eos 76
adding to project, 27 choosing, 25 downloading from Web, 26 preparing for DVD Architect, 23 previewing, 26 recompression, 34  First play media, 27 flicker reduction, 41, 79, 88, 100  Formatting subtitle event, 114 text, 48, 49, 77 text in compilation, 87  Frame masks, 118  General preferences, 151 General Purpose Register Memories (GPRM), 134 Generating suick with Cinescore, 116 Generating soundtracks, 116 GotoLabel command type, 131 Graphic inserting, 47, 87, 88 Graphics Properties, 47 Grid Grid Grid Introduction  K	
Generating slideshow animation, 84  Generating soundtracks, 116  GotoLabel command type, 131  Graphic inserting, 47, 87, 88  Graphics Properties, 47  Grid snapping to, 67  Grid layout properties, 127  K	anguage code, 134 anguage code extension, 134 ge, 134 e language extension, 134  47 ection menu, 50 nu, 52 ompilation, 88 a video markers, 98 arkers, 98
GotoLabel command type, 131  Graphic inserting, 47, 87, 88  Graphics Properties, 47  Grid snapping to, 67  Grid layout properties, 127  K	aphic subtitle, 111
Graphic Inserting text Installing DV Graphics Properties, 47 Grid Introduction, snapping to, 67 Grid Introduction Grid layout properties, 127	tement in a script, 130
inserting, 47, 87, 88  Graphics Properties, 47  Grid  snapping to, 67  Grid layout properties, 127  K	F - 7
Graphics Properties, 47  Grid  snapping to, 67  Grid layout properties, 127  K	•
snapping to, 67  Grid layout properties, 127  K	•
K K	, 48
Ш	, 48 D Architect, 11 er, 41, 79, 88, 100
12 1 12/	, 48 D Architect, 11 er, 41, 79, 88, 100
Hiding/showing Toolbar, 149  Highlight applying to menu, 43  Highlight masks, 119  Highlighted button number, 134  Highlighting buttons, 70  Keyframe tool, 64	, 48 D Architect, 11 eer, 41, 79, 88, 100 27 media, 27

Keyframe animation, 104	Media Properties
Keyframe tool, 64	viewing and editing, 60
Keyframes adding, 59 changing interpolation curves, 59 crop and video effects, 58 deleting, 59 editing crop settings, 60 moving, 60 navigating between, 59	Media properties, 100 Audio, 101 color sets, 102 end action, 101 general, 100 remote buttons, 101 track media, 100 Video, 100
transformation, 62	Menu Page properties, 41 Background Media, 42 Color Sets, 45
Layered menu graphics, 120 naming requirements for, 120	End Actions, 44 General, 41 Remote Buttons, 44
Length adjusting subtitle event, 113	Menu-based DVD adding movie title, 97
Link command type, 131 Link GPRM command type, 132	adding music/video compilation,75 adding picture compilation,83 adding playlists,93
Linking a series of videos, 93	Menus
Loading markers, 99  Looping point for menus, 42	adding buttons, 53 adding media, 46 adding music compilation, 46
M	adding pages, 40 adding single-movie object, 46
Main toolbar, 14	adding submenu from file, 39 adding submenus, 39
Main window overview, 13	aligning objects, 65
Manual using, 11	applying highlight mask, 43 applying themes, 123
Markers, 97 chapter, 97 deleting, 99 loading, 99 moving, 99 renaming, 99 saving, 100 scene/chapter, 97	arranging objects, 61 automatically updating objects, 40 building, 39 changing background media, 42 changing page order, 41 choosing color sets for buttons, 45 custom, 120, 121, 122 editing properties, 41 end actions, 44
Mask applying to menu, 43	inserting graphic, 47 inserting picture slideshow, 46
Mastering preferences, 155	inserting text, 48 looping, 42 moving objects, 61
Mastering files, 145	scene selection, 50
Media adding, 46 first play, 27 introduction, 27	setting length, 41 setup, 52 transitions, 53 turning remote control buttons off, 44
Media files adding to project, 27	Monitor external, 139
choosing, 25	Mouse shortcuts, 159
downloading from Web, 26 previewing, 26	Movie title adding to a menu, 97
recompression, 34	Moving keyframes, 60

Moving markers, 99	setting order, 73
Moving objects, 61	snapping, 66, 67
Moving text, 49, 78	OHCI 1394-IEEE cards, 139
in compilation, 87	Online help
Music compilation, 75	accessing, 11
adding audio, 76	icon, 11
adding text to track, 77	via the web, 12
adding to menu, 46	What's This? help, 12
adjust brightness and contrast or edit the image, 77	Opening projects, 25
deleting text, 78	Optimizing projects, 34
formatting text, 77	adjusting audio recompression, 36
moving text, 78	adjusting project settings, 37
replacing audio file, 76	adjusting video recompression, 35
rotating images,77 setting image stretching or scaling,77	Order of objects, 73
setting thumbnail display, 78	
	Out point setting, 97
Music compilation properties General, 79, 100	setting, 91
	Р
Music/video compilation	
adding to a menu, 75	Pages
inserting images or videos,76 properties,78	adding buttons, 53
replacing images or videos, 76	adding to menu, 40 deleting from menu, 40
	inserting text, 48
Music/video compilation properties, 78 Color Sets, 81	
End Action, 79	PAL MPEG video, 24
Remote Buttons, 79	Parental management level, 134
Slide, 80	PCM audio, 23
	Picture compilation, 83
N	adding images, 83
Navigating between keyframes, 59	adding text, 87
	adding to a menu, 83
Navigation buttons, 73	adding to menu, 46
tool, 73	adjust brightness and contrast or edit the image, 86
	deleting text, 87
Navigation timer, 134	formatting text,87 inserting audio,88
Navigation timer destination, 134	inserting additio, 66
Navigation tool, 73	inserting graphic, 87
Nop command type, 131	moving text, 87
	properties, 88
NTSC MPEG video, 23	replacing images, 84
0	rotating images, 85
0	setting display duration, 86 thumbnail display, 88
Objects	- '
adjusting spacing, 66	Picture compilation properties, 88
aligning, 65	Color Sets, 91
arranging, 61	End Action, 89 General, 88
automatically aligning, 65	Remote Buttons, 90
centering, 66 changing position, 62	Slide, 90
changing position, 62 changing size, 55	Track Media, 89
deleting, 66	
moving, 61	Play All, 50
order, 73	Play Chapter, 51
resizing, 55	Playback

timeline, 108	starting a new, 24
Player audio mixing mode for karaoke, 134	workspace, 15
Player configuration for audio, 134	Project Overview window, 14
Player configuration for video, 134	Project properties
Player region codel, 134	changing,27 Copy protection,30
Playlist properties, 94 End Action, 95 Playlist Item, 95	Disc properties, 27 Mastering, 32 Regions, 31
Playlists, 21, 93	summary information, 33 viewing, 27
adding titles to, 94 adding to menu, 93 adding without link, 93 deleting titles, 94 properties, 94 rearranging titles, 94 renaming, 94	Properties button, 67 changing, 27 Video Event, 109 viewing, 27 Properties window, 20
Position	
changing, 62	R
subtitle event, 113 Preferences	Regions using to create subtitles, 112
Burning tab, 154 Display tab, 154 Editing tab, 153	Remote control buttons turning off, 44
General tab, 151	Removing a statement from a script, 131
Mastering tab, 155	Renaming a script, 133
Preview tab, 154 setting, 151	Renaming markers, 99
Video Device tab, 153 Video tab, 152 Preparing	Replacing audio files, 76 in track, 107
and mastering, 145	Replacing images in compilation, 84
files for DVD Architect, 23	Resizing objects, 55
project,141 your DVD,141	Resume command type, 132
Preview	Rotating images in picture compilation, 85
media files, 26	Notating images in picture compitation, of
menu snapshot on external monitor, 138	S
preferences, 154 projects in DVD Architect, 137	Safe areas snapping to, 67
Project adding files, 27 adjusting audio recompression, 36 adjusting settings, 37	Saving a project, 38 copy of project, 38
adjusting video recompression, 35	Saving markers, 100
burning, 142 choosing files, 25	Scene selection menu creating, 50
opening existing, 25 optimizing, 34 preparing, 141	Scene/chapter markers inserting, 98
preparing and mastering, 145	Script Debugger Pane, 133
previewing, 137 previewing menu snapshot on external monitor, 138	Script Properties window, 131
properties, 27	Scripting, 129
saving, 38 saving a copy, 38	Labels, 132
oaving a copy, 50	

Scripts Adding, 130 Appending statements, 130 Comments, 133 Creating, 130 Deleting, 134 Editing commands, 131 Editing statements, 131 General Purpose Register Memories, 134 Inserting statements, 130 Removing statements, 131 Renaming, 133 Setting conditions, 132 Start Script, 134 Testing, 133 Using, 129	Audio track number, 134 Chapter number, 134 Country code for parental management, 134 Initial audio language code, 134 Initial audio language code extension, 134 Initial language, 134 Navigation timer, 134 Navigation timer destination, 134 Parental management level, 134 Player audio mixing mode for karaoke, 134 Player configuration for audio, 134 Player configuration for video, 134 Subtitle track number, 134 Title program chain number, 134 Video angle number, 134 Video title set (VTS) number, 134
Sequential videos, linking, 93	Start item, 27
Set GPRM command type, 131	Start script, 41
SetMode GPRM command type, 132 SetStreams command type, 132 Setting	Statement types Commands, 131 Comments, 133 Label, 132
DVD Architect software preferences, 151 first play media, 27 image stretching or scaling, 77 in and out points, 97 menu length, 41 object order, 73 start item, 27 thumbnail size, 88	Stop command typel Command types Stop, 132 Stretch type, 85 Submenus adding from file, 39 adding to project, 39
Setting a DVD start script, 134	subtitle event position, 113
Setting loop points, 50 Setting up external monitor, 138 Setup menu, 52	Subtitle properties, 115 Color sets, 115 Subtitle Event, 115 Transformations, 115
Shortcuts, 157 Keyboard, 157 Mouse, 159	Subtitle track number, 134 Subtitles, 109 adding text, 110
Single-movie DVD, 97 Single-movie object adding to menu, 46 Slide	adding tracks, 110 adjusting event length, 113 adjusting event timing, 113 changing track colors, 115 copying event formatting, 114
inserting empty, 86  Snapping, 66 grid, 67 objects, 67 safe areas, 67 to action safe area, 67 to title safe area, 67	creating a graphic subtitle, 111 creating from Vegas regions, 112 editing event color set, 114 exporting, 112 importing, 112 inserting a graphic subtitle, 111 setting track for timeline playback, 114 Summary information, 33
Spacing	System Parameter Register Memories (SPRMs), 134
adjusting, 66  SPRMS  Highlighted button number, 134	System requirements, 11
SPRMs	Т
	Testing a script, 133

Text	Trivia Quiz via Scripting, 129
adding to compilation, 87	U
adding to music compilation, 77 deleting, 78, 87	0
editing, 48, 49	Using Scripting, 129
formatting, 48, 49, 77, 87 inserting, 48	V
moving, 49, 78, 87 subtitle, 110	Video
Text toolbar (Alt+2), 16	adjusting recompression, 35 linking a series, 93
Themes, 123	Video angle number, 134
alignment to menu objects, 124	Video Event properties, 109
applying, 124 automatically aligning objects, 65	Video recompression
creating custom, 124	adjusting settings, 35
deleting, 124	Video title set (VTS) number, 134
exporting menu as, 125	Video tracks, 108
Themes window, 17	adding, 108
Thumbnail	adding video to, 108
masks, 117 size, 78, 88	changing colors, 109 setting timeline playback for, 109
Timeline, 113	Viewing and editing media properties, 60
Timeline playback	W
setting audio track,108	
Timeline window, 20	Web downloading media, 26
Timing subtitle event, 113	Web site
Title number, 134	accessing help, 12
Title program chain number, 134	What's This? help, using, 12
	Window Docking Area (F11), 17
Title safe area, 67	Backgrounds, 18
Titles transitions, 53	Buttons, 18 Compilation, 19
,	DVD Scripts, 22
Toolbar adding buttons, 150	Explorer, 17
customizing, 149	Playlists, 21 Properties, 20
editing, 16	Themes, 17
hiding/showing, 149 main, 14	Timeline, 20
removing buttons, 150	Working with markers, 97
reordering buttons, 149	Workspace, 15
text, 16	editing toolbar, 16
Tracks	text toolbar, 16
adding audio, 107 adding subtitle, 110	
replacing, 76	
replacing audio, 107	
setting for timeline playback,108 setting subtitle for timeline playback,114	
Transform bar, 62	
Transformation keyframes, 62	
Transitions between menus or titles, 53	